MAX485EESA+T
10Mbps communication transceiver

Description

MAX485EESA+T is 3V to 5.5V power supply,±15kV anti-static slow limit differential transceiver and can provide complete RS485 compatibility for half-duplex applications.Each section contains a driver and a receiver designed for data transmission over an extended common-mode range (-7V to +12V).It can effectively transmit data at a high rate of up to 10Mbps.

Drivers are short-circuit current limited and are protected against excessive power dissipation by thermal shutdown circuitry that places the driver outputs into a high-impedance state. The Rx input has a fail-safe feature that guarantees a logic-high output if the input is open circuit, shut-circuit and shutdown but not drive.

Both components have power-on/off modes, and fault-free driver outputs allow transceivers to be inserted or removed from bus in real time. CMOS designs aim to offer significant power savings without sacrificing overload or ESD damage. Typically, static current is only 300uA in operation and 1uA in shutdown mode.

Feature

- High communication rate, 3.0V ~ 5.5V power supply 10Mbps
- High ESD protection
- Low power consumption down to 1uA, shutdown mode
- Input voltage range: -7V to +12V (common mode)
- Bus connection up to 256 nodes
- Thermal shutdown protection function
- Drive overload protection function
- Full fault-safe (open circuit, short circuit, etc.)


Product Application


- Power communication
- Integrated digital network
- Industrial control local area network
- Power measurement (smart meter)
- Factory automation and control

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
MAX485EESA+T	SOP-8	X485E	Tape	2500Pcs/Reel

Description of Pins

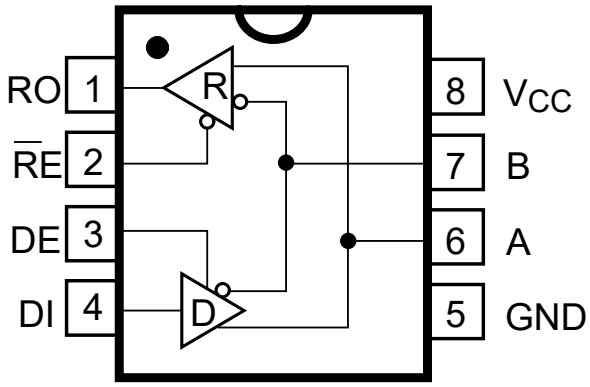

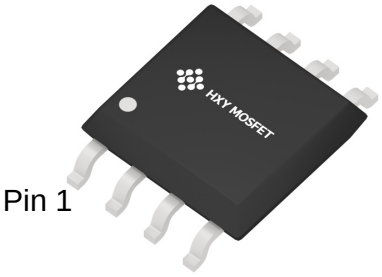

Function Diagram

Pins		Type	Description
Name	**Serial No.**		
RO	1	Output	Reverse Output
$\overline{RE}$	2	Input	Reverse Output Enable
DE	3	Input	Drive Enable
DI	4	Input	Drive Input
GND	5	Power	Ground
A	6	I/O	Noninverting Receiver Input and Noninverting Driver Output
B	7	I/O	Inverting Receiver Input and Inverting Driver Output
Vcc	8	Power	RS-485 Transceiver Power Supply

Limit Parameters

Exceeding the absolute maximum rating may result in permanent damage to the device, and prolonged operation at the absolute maximum rating may affect the reliability of the device.

Name	Symbol	Notes	Min.	Max.	Unit
Positive Supply	Vcc		-0.3	7	V
Control Input Voltage	$\overline{RE}$,DE		-0.3	Vcc+0.3	V
Drive Input Voltage	DI		-0.3	Vcc+0.3	V
Drive Output Voltage	A,B		-8	13	V
Reverse Input Voltage	A,B		-8	13	V
Reverse Output Voltage	RO		-0.3	Vcc+0.3	V
Operating Temperature Ranges	T_a		-40	85	°C
Storage Temperature Range	T_{stg}		-60	150	°C

Electrostatic Protection

Human Body Model (HBM) testing in accordance with EIA/JESD22-A114-B HBM

Test Parameters			Value	Unit
Voltage of Electro-Static Discharge (V_{ESD})	Human Body Model (HBM)	Pin A, B to GND	±15	kV
		Other Pins	±8	kV
	Charged-DeviceModel (CDM)	All Pins	±2	kV

Electrical Parameters

(Vcc = +3.3V to +5V, $T_A = T_{MIN}$ to T_{MAX}, unless otherwise noted, typical at 3.3V and +5V, ambient temperature +25°C.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Supply						
Supply Voltage	Vcc		3	5	5.5	V
Input Circuit Current	Icc	Receiving Mode $\overline{RE}$ = 0; DE = 0; Vcc=5V		240	650	uA
		Transmitting $\overline{RE}$ = 1; DE = 1; Vcc = 5V		270	750	uA
		Receiving Mode $\overline{RE}$ =0;DE=0; Vcc=3.3V		250	650	uA
		Transmitting Mode $\overline{RE}$ =1;DE=1;Vcc=3.3V		280	750	uA
Cut-off Current	Ishdn	$\overline{RE}$ =Vcc,DE=0, Vcc =3.3V		0.2	10	uA
		$\overline{RE}$ =Vcc, DE=0, Vcc =5V		0.2	10	uA
Logic						
Input a Logic-high Input Voltage	V_{IH}	DE,DI,RE	2.0			V
Input a Logic-low Input Voltage	V_{IL}	DE,DI,RE			0.8	V
DI Input Voltage Hysteresis	V_{HYS}	-7V≤V_{CM}≤12V	10	30		mV
Receiving						
Three-phase Current	I_{OZR}	0.4V<V_0<2.4V			±1	uA
Short Circuit Current	I_{OSR}	0V≤V_0≤Vcc	±8		±90	mA
Output High Voltage	V_O	V_A=2.8V, V_B=2.5V, I_{R0}=8mA	Vcc- 1.5			V
Output Low Voltage	V_{OL}	V_A =2.5V, V_B =2.8V,I_{R0}=-8mA			0.4	V
Input Impedance	R_{IN}	-7V≤V_{CM}≤12V	96			kΩ
Differential Threshold Voltage	V_{TH}		-200		-50	mV
Input Hysteresis Voltage	ΔV_{TH}	-7V≤V_{CM}≤12V		25		mV
Transmitting						
Output Voltage (no load)	V_{OD1}		3		5.5	V
Output Voltage	V_{OD2}	R_L = 54 Ω, Vcc = 5 V	1.5		Vcc	V
Voltage Magnitude Variation	ΔV_{OD}	R_L = 54 Ω			0.2	V
Common Mode Voltage	V_{OC}	R_L = 54 Ω			3	V
Common-mode Voltage Variation	ΔV_{OC}	R_L = 54 Ω			0.3	V
Short Circuit Current	I_{OSD}	Short Circuit to Low -7-0V	-250			mA

Switching Characteristics parameters

(Vcc = +3.3V to +5V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted, typical at 3.3V and +5V, ambient temperature +25°C.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Units
Transmitting						
Maximum Data Rate	f_{MAX}			10		Mbps
Differential Output Time Delay	t_{DD}	RL=60Ω, Figure 3		20	40	ns
Differential Output Conversion Time	t_{TD}	RL=60Ω, Figure 3		12	28	ns
Driver Output Time Delay from Low to High	t_{PLH}	RL=27Ω, Figure 4		20	40	ns
Driver Output Time Delay from High to Low	t_{PHL}	RL=27Ω, Figure 4		20	40	ns
$\|t_{plh}-t_{phl}\|$Output Time Delay	t_{PDS}	RL=27Ω, Figure 4		1	8	ns
Output Enable and Shutdown Times						
Driver Output Enable to a Logic-low	t_{PZL}	RL=110Ω, Figure 6			55	ns
Driver Output Enable to a Logic-high	t_{PZH}	RL=110Ω, Figure 5			55	ns
Driver Output from Shutdown to a Logic-high	t_{PHZ}	RL=110Ω, Figure 5			85	ns
Driver Output from Shutdown to a Logic-low	t_{PLZ}	RL=110Ω, Figure 6			85	ns
Driver Output Enable Time from Shutdown to a Logic-low	t_{PSL}	RL=110Ω, Figure 6		20	100	ns
Driver Output Enable Time from Shutdown to a Logic-high	t_{PSH}	RL=110Ω, Figure 5		20	100	ns
Receiving						
Shutdown Time	t_{SHDN}		50		300	ns
Receiver Delay Time from Low to High	t_{RPLH}	VID=0 to 3.0V, CL=15pF, Figure 7		60		ns
Receiver Delay Time from High to Low	t_{RPHL}	VID=0 to 3.0V, CL=15pF, Figure 7		60		ns
$\|Trplh-Trphl\|$ Delay Times	t_{RPDS}	VID=0 to 3.0V, CL=15pF, Figure 7		3	10	ns
Output Enable Time to Low	t_{PRZL}	CL=15pF, Figure 8		100	300	ns
Output Enable Time to High	t_{PRZH}	CL=15pF, Figure 8		100	300	ns
Output Shutdown to High	t_{PRHZ}	CL=15pF, Figure 8		25	55	ns
Output Shutdown to Low	t_{PRLZ}	CL=15pF, Figure 8		25	55	ns
Output Enable Time from Shutdown to Low	t_{PRSL}	CL=15pF, Figure 8		100	300	ns
Output Enable Time from Shutdown to High	t_{PRSH}	CL=15pF, Figure 8		100	300	ns

Communication Function Table

Table 1: Transmitting

Inputs			Outputs		Mode
$\overline{RE}$	DE	DI	B	A	
X	1	1	0	1	Normal.
X	1	0	1	0	Normal.
0	0	X	High-Z	High-Z	Normal l
1	0	X	High-Z	High-Z	Shutdown

Table 2: Receiving

Inputs			Outputs	Mode
$\overline{RE}$	DE	A, B	RO	
0	X	>-50mV	1	Normal
0	X	<-200mV	0	Normal
0	X	Input Open	1	Normal l
1	0	X	High-Z	Shutdown

Test Circuits and Typical Circuits

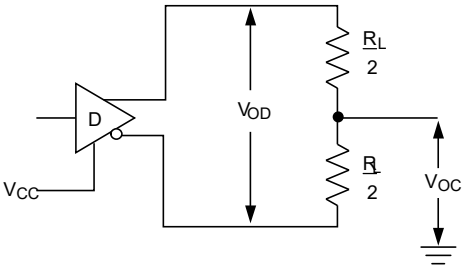


Figure 1 Transmitting V_{OD} and V_{OC}

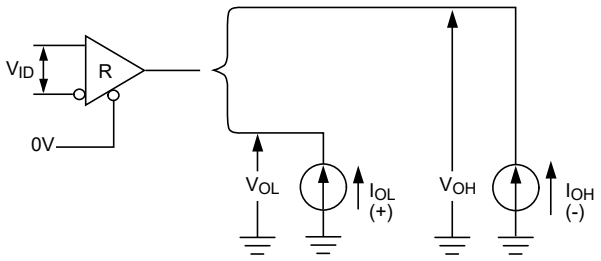
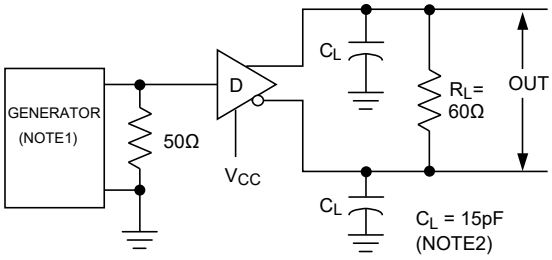


Figure 2 Receiving V_{OH} and V_{OL}



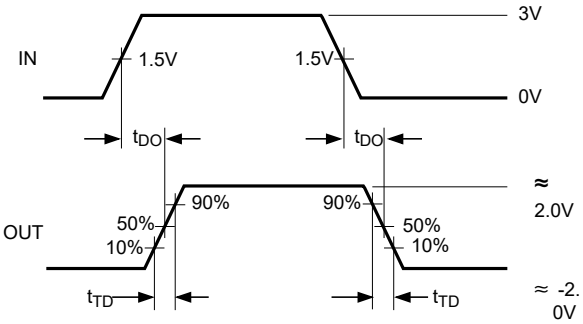
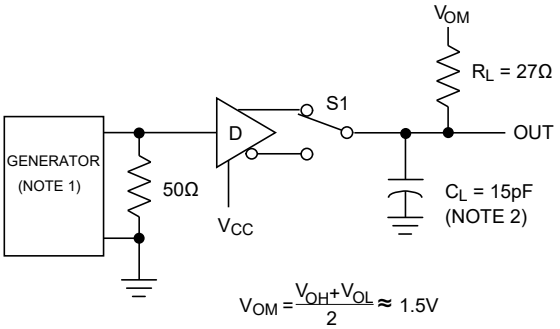


Figure 3. Differential Output Delay and Conversion Time



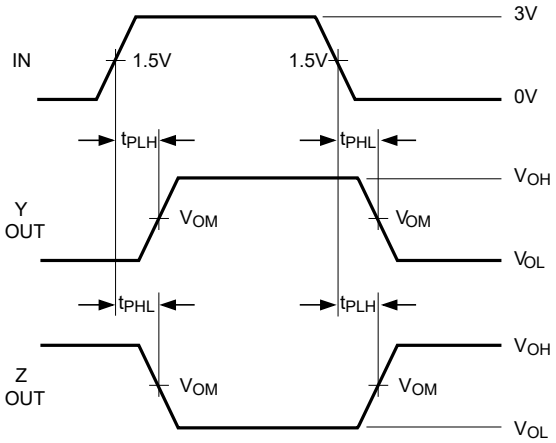
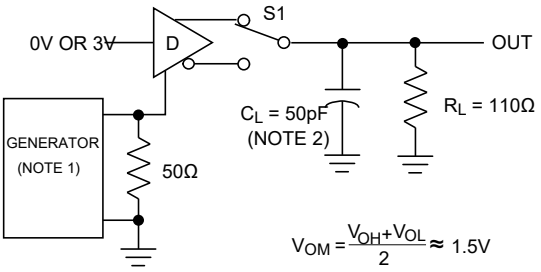


Figure 4 Transmission Delay Time



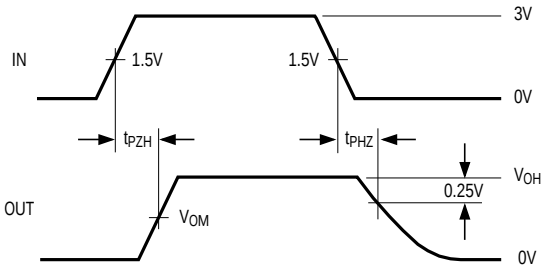


Figure 5. Enable and Shutdown Times (t_{PZH}, t_{PSH}, t_{PHZ})

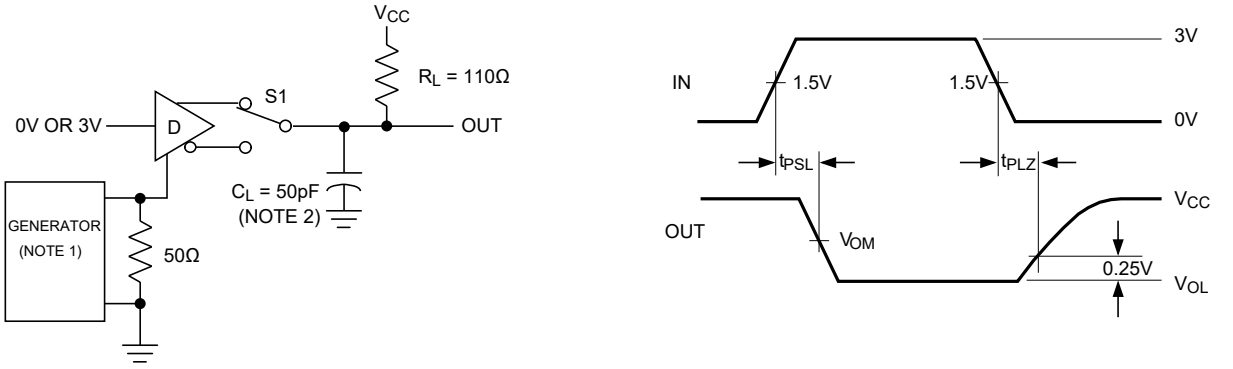


Figure 6. Enable and Shutdown Times (t_{PZL}, t_{PSL}, t_{PLZ})

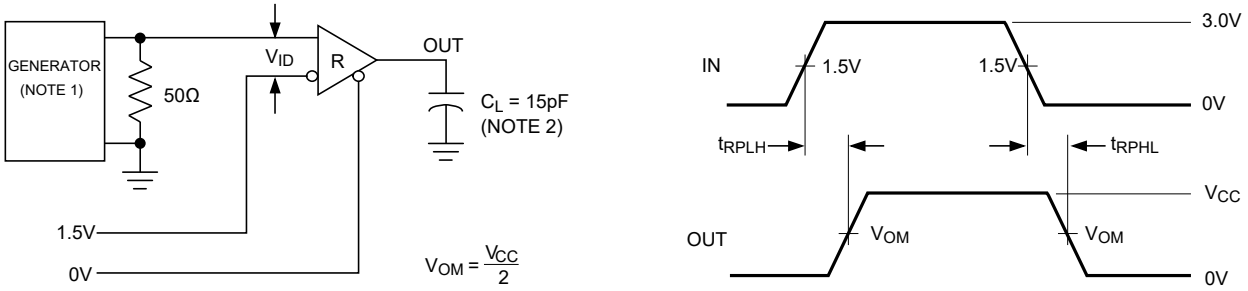


Fig. 7 Receiving Transmission Delay

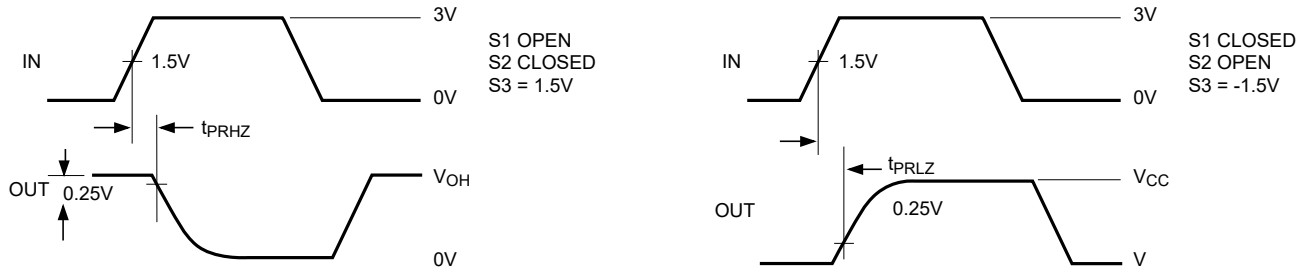


Figure 8 Receiving OPEN and CLOSE Times

Note 1: The input pulse is supplied by a generator with the following characteristics: PRR = 250kHz, 50% duty cycle, t_r ≤ 6.0ns, Z_O = 50Ω.
Note 2: C_L includes probe and stray capacitance.

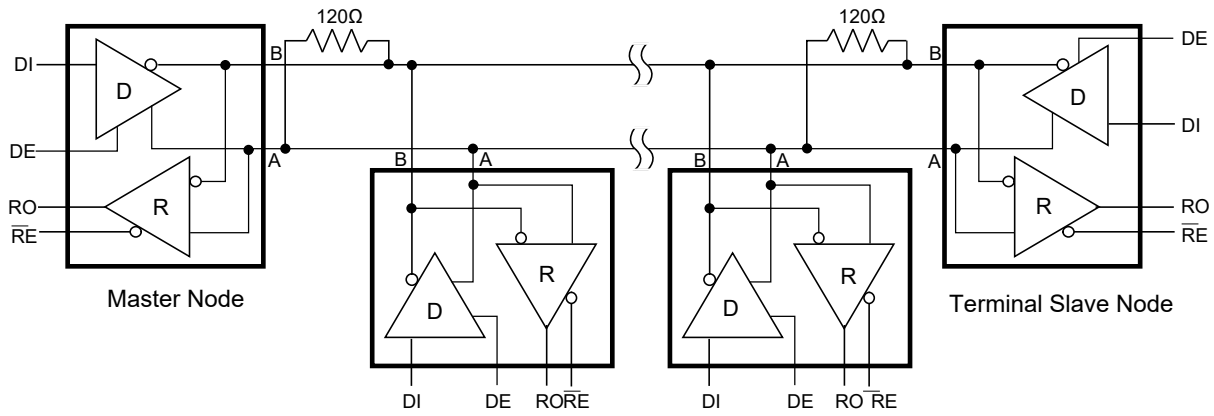


Figure 9 Typical Half-duplex RS-485 Network Application

Detailed Function Description

The MAX485EESA+T series is a low-power transceiver for RS-485 communication network and can support data transmitting rates up to 10Mbps. All components are half duplex, including the Drive Enable (DE) and Receiver Enable (RE) pins. When powered off, the outputs of driver and receiver are high impedance.

◆ ESD Protection

The MAX485EESA+T A B pins are particularly susceptible to ESD shocks because they are typically as external pins in products. Human actions like simply touching the pins or other actions can result in ESD problems.

Though MAX485EESA+T itself already has good ESD capabilities, additional ESD protection devices are suggested to be added between the external A pin and B pin to enhance its performance.

◆ Low Power and Shutdown Mode

Low power shutdown mode is initiated by turning $\overline{RE}$ up and turning DE down. When powered off, the device typically draws only 1uA of supply current. $\overline{RE}$ and DE can be driven simultaneously. When $\overline{RE}$ in high and DE are less than 50ns, the components are guaranteed to continue. If the input is in this state for at least 300ns, the components are guaranteed to close. From the switching characteristics table, if the Enable Times t_{PZH} and t_{PZL} is not in a low power shutdown state and the component to start the enable times is turned off, Time of enabling the driver and receiver from low power off mode (t_{PSH}, t_{PSL}) takes longer than that of enabling them from disabled mode

(t_{PZH}, t_{PZL}).

◆ Bus Supports 256-node Transceiver


The standard RS-485 receiver has an input impedance of 12kΩ (one unit load), and the standard driver can drive up to 32 unit loads. The MAX485B transceiver has a 1/8 unit load receiver with input impedance (96kΩ), allowing 256 transceivers to be connected in parallel on a single communication line. Any combination of these devices and/or other RS-485 transceivers with totaling 32 unit loads or less can be connected to the line.

◆ Output Protection

The output protection mechanism can prevent excessive output current and power loss due to faults or bus contention. First, the folded current limit on the output stage can provide immediate short-circuit protection over the entire common-mode voltage range. Second, a thermal shutdown circuit can force the driver output to a high impedance state if the mold temperature becomes too high.

Package Information

SOP-8

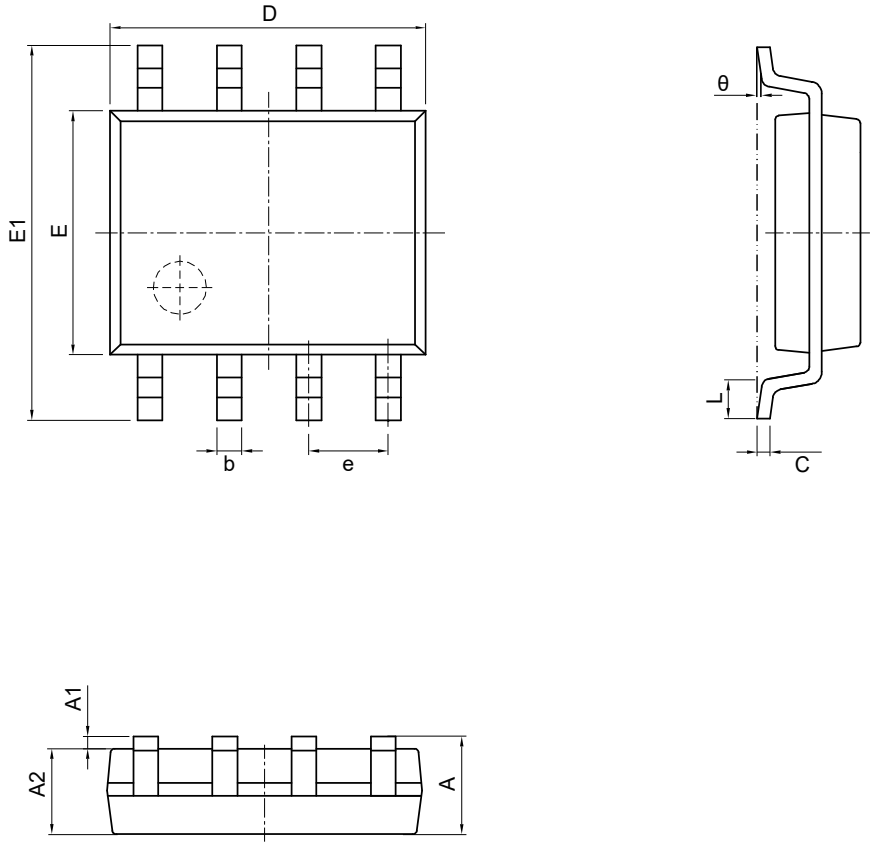

Size / Symbol	Dimensions In Millimeters		Size / Symbol	Dimensions In Inches	
	Min(mm)	Max(mm)		Min(in)	Max(in)
A	1.350	1.750	A	0.053	0.069
A1	0.100	0.250	A1	0.004	0.010
A2	1.350	1.550	A2	0.053	0.061
b	0.330	0.510	b	0.013	0.020
c	0.170	0.250	c	0.006	0.010
D	4.700	5.100	D	0.185	0.200
E	3.800	4.000	E	0.150	0.157
E1	5.800	6.200	E1	0.228	0.224
e	1.270(BSC)		e	0.050(BSC)	
L	0.400	1.270	L	0.016	0.050
θ	0°	8°	θ	0°	8°

Attention

■ Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

■ HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

■ Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could
give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HXY MOSFET:

HAZ4007-01H HESDSLC3V3D3B HSEN2411D3 PJSD24CW_R1 PESDLC2FD3V3BH PESDNC2XD5VBL PESDSC2FD5VU HSD15C.TCT TPSMB100CA-VR TPSMB28A-VR HPTVSUC3D5VB AZ4836-01L BV05C-H ESD5L5.0C-HXY ESD5LM5.0C-HXY PJEC5V0M1FN2 HESD36VD3B HLY323BC1524L AQ15C-01FTG AZ4007-01H HSEN3611D3 HSG3D15B3.3MA HSTS521050B331 LM393DR-HXY PESDNC2XD5VBF HACPDQC5V0-HF HRCLAMP3371ZCTFT RLSD32A121V 60N06 HCEZ36V,L3F