ADJUSTABLE HIGH PRECISION SHUNT REGULATOR


■GENERAL DESCRIPTION

The **NJM2373/NJM2373A** and **NJM2376** are adjustable high precision shunt regulators.

The output voltage can be adjusted to any value between reference voltage and 14V by two extend resistors.

■PACKAGE OUTLINE






NJM2373F/AF **NJM2373U/AU**
NJM2376F **NJM2376U**


■FEATURES

- Operating Voltage V_{REF} to 13V
- High Precision Voltage Reference NJM2373 1.25V±2%
  NJM2373A/76 1.25V±1%
- Minimum Input Current 80uA typ.
- Adjustable Output Voltage For External Resistance two Parts
- Bipolar Technology
- Package Outline SOT-89 (3pin), MTP5


■BLOCK DIAGRAM

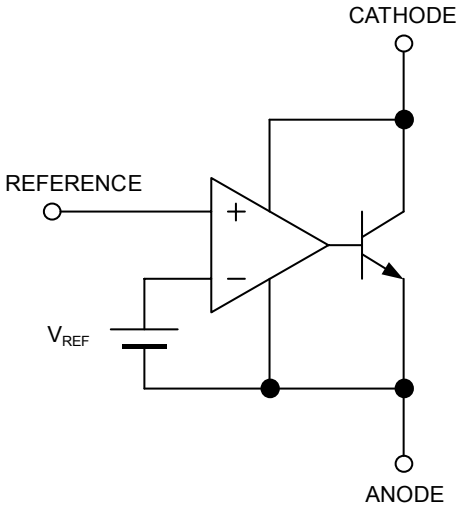


■PIN CONFIGURATION

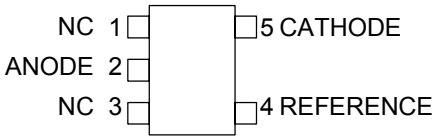


NJM2373F/73AF

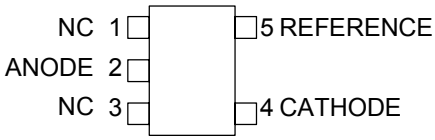

NJM2376F



NJM2373U/AU



NJM2376U

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Cathode Voltage	V_{KA}	+14	V
Continuous Cathode Current	I_K	-30 ~ 50	mA
Reference Input Current	I_{REF}	-10 ~ 0.05	mA
Power Dissipation	P_D	(SOT-89) 350 (MTP5) 200	mW
Operating Temperature Range	T_{OPR}	-40 ~ +85	°C
Storage Temperature Range	T_{STG}	-40 ~ +150	°C

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Cathode Voltage	V_{KA}	V_{REF}	–	13	V
Cathode Current	I_K	1	–	30	mA

■ELECTRICAL CHARACTERISTICS (I_K=1mA, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Voltage	V_{REF}	$V_{KA}=V_{REF}$ NJM2373A	(*1)	1225	1250	1275	mV
		$V_{KA}=V_{REF}$ NJM2373A/ NJM2376	(*1)	1237	1250	1263	
Reference Voltage Change vs. Cathode Voltage Change	$\Delta V_{REF}/\Delta V_{KA}$	$\lvert V_{REF} \rvert \leq V_{KA} \leq 5V$	(*2)	–	–	±2.7	mV/V
		$5V \leq V_{KA} \leq 13V$	(*2)	–	–	±2.0	mV/V
Reference Input Current	I_{REF}	$V_{KA}=V_{REF}$ R1=10kΩ, R2=∞	(*2)	–	2.0	4.0	μA
Minimum Input Current	I_{MIN}	$V_{KA}=V_{REF}$, ΔV_{REF}=±1%	(*1)	–	80	500	μA
Cathode Current (Off Cond.)	I_{OFF}	V_{KA}=13V, V_{REF}=0V	(*3)	–	0.01	1.0	μA
Dynamic Impedance	$\lvert Z_{KA} \rvert$	$V_{KA}=V_{REF}$, f≤1kHz 0.5mA ≤ I_K ≤ 30mA	(*1)	–	0.12	–	Ω

■TEMPERATURE CHARACTERISTICS (I_K=1mA, Ta= -40°C ~ 85°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Voltage Change	ΔV_{REF}	$V_{KA}=V_{REF}$	(*1)	–	±10	–	mV
Reference Input Current Change	ΔI_{REF}	$V_{KA}=V_{REF}$ R1=10kΩ, R2=∞	(*2)	–	0.5	–	μA

$\lvert V_{REF} \rvert$ ···Reference voltage includes error.

(*1): Test Circuit (Fig.1)

(*2): Test Circuit (Fig.2)

(*3): Test Circuit (Fig.3)

■TEST CIRCUIT

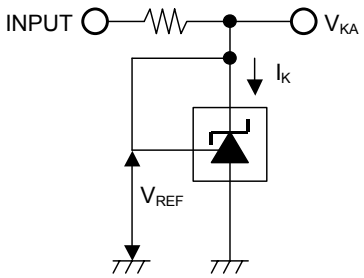


Fig.1 $V_{KA}=V_{REF}$ to test circuit

$V_O=V_{KA}=V_{REF}$

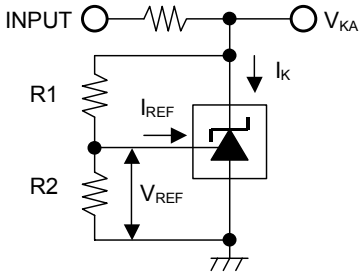


Fig.2 $V_{KA}>V_{REF}$ to test circuit

$$V_O = V_{KA} = V_{REF}\left(1+\frac{R1}{R2}\right)+I_{REF}\times R1$$

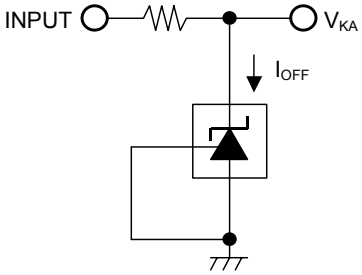


Fig.3 I_{OFF} to test circuit


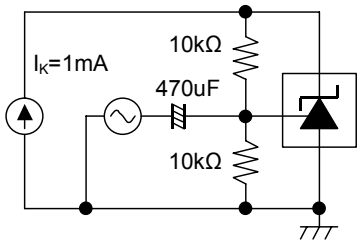



Fig.4 Gain and Phase to test circuit

■POWER DISSIPATION VS. AMBIENT TEMPERATURE

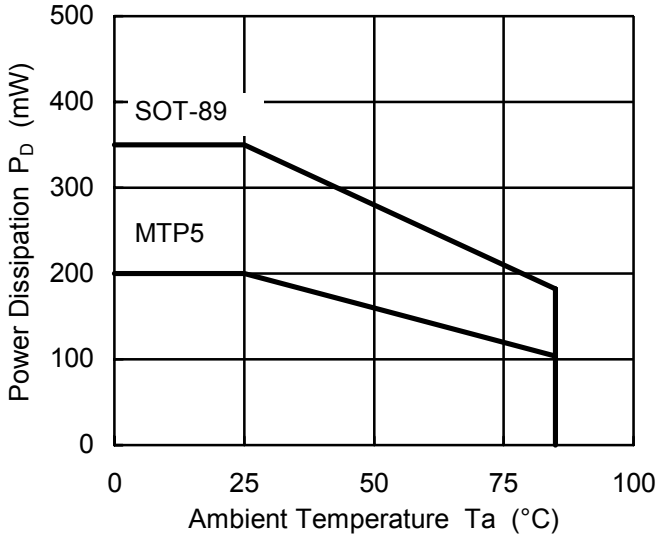


■TYPICAL CHARACTERISTICS


Reference Voltage vs. Cathode Current
(V_{KA}=V_{REF},Ta=25°C)

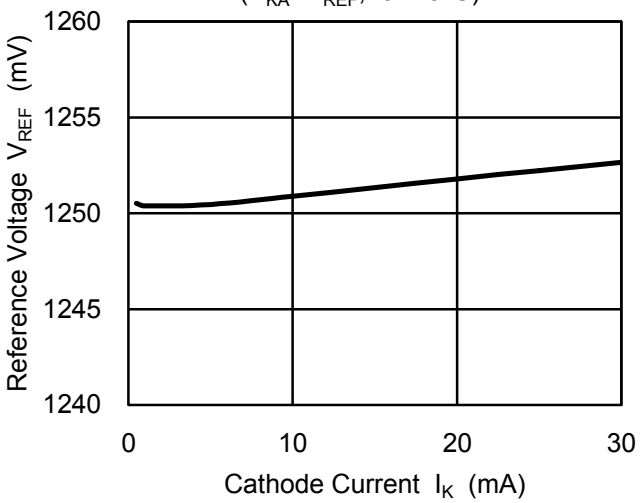


Reference Voltage vs. Cathode Current
(V_{KA}=V_{REF},Ta=25°C)

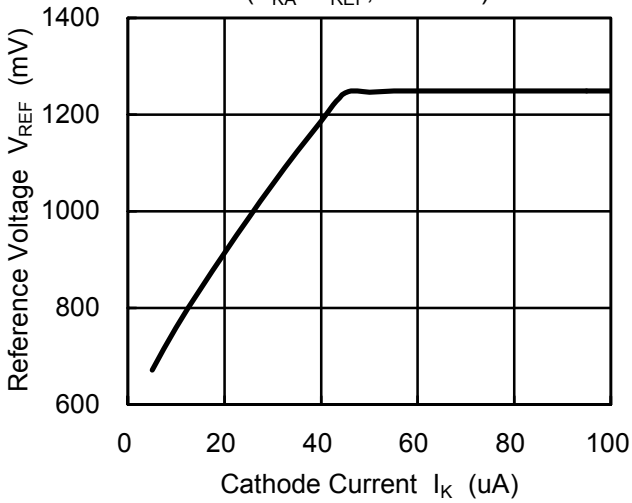


Reference Voltage Change vs. Cathode Voltage
(I_K=1mA,R1=Variable,R2=10kΩ,Ta=25°C)

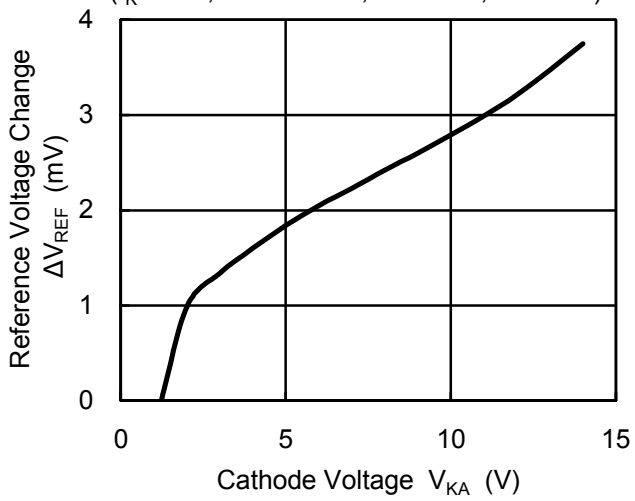


Cathode Current (Off Cond.) vs. Cathode Voltage
(V_{REF}=0V,Ta=25°C)

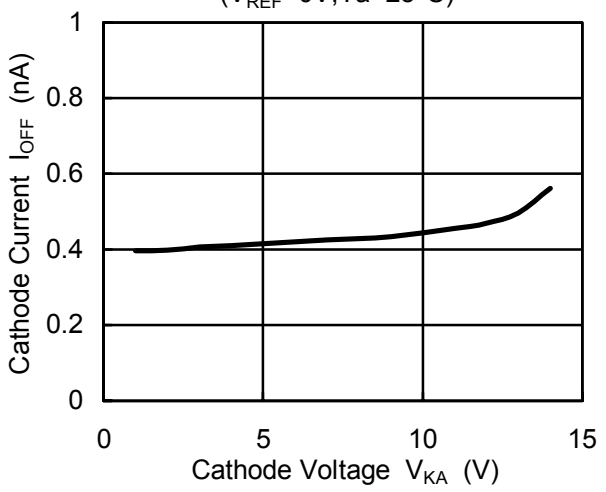

Dynamic Impedance
(I_K=0.5~30mA,V_{KA}=V_{REF},Ta=25°C)

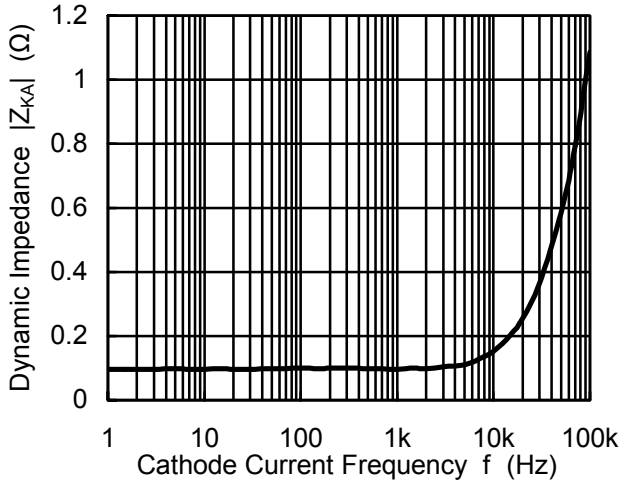


Voltage Gain · Phase vs. Frequency
(Fig.4 Test Circuit,Ta=25°C)

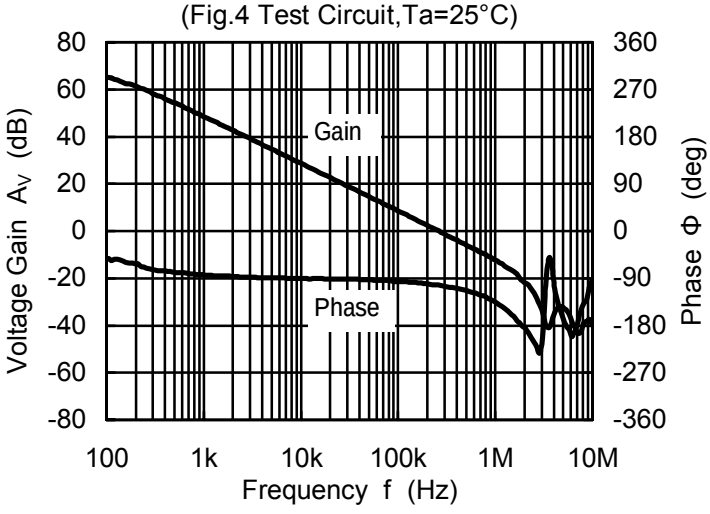


■TYPICAL CHARACTERISTICS

Sefty Operating Boundary Condition
(V_{KA}=V_{REF},Ta=25°C)

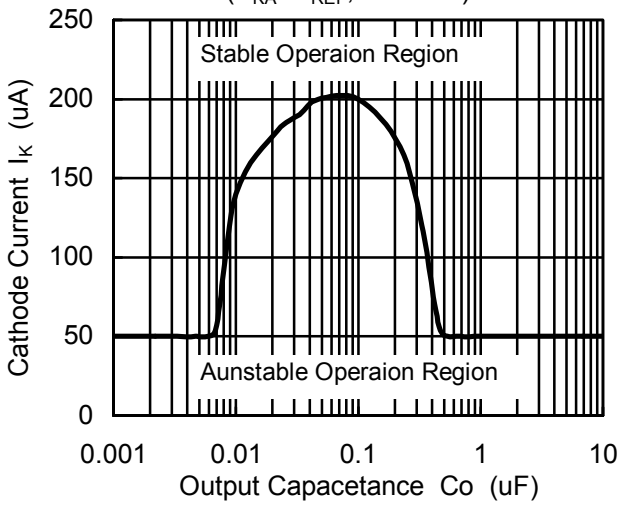


Note) Oscillation might occur while operating within the range of safety curve.
So that, it is necessary to make ample margins by taking considerations of fluctuation of the device.


Reference Voltage vs. Temperature
(I_K=1mA,V_{KA}=V_{REF})

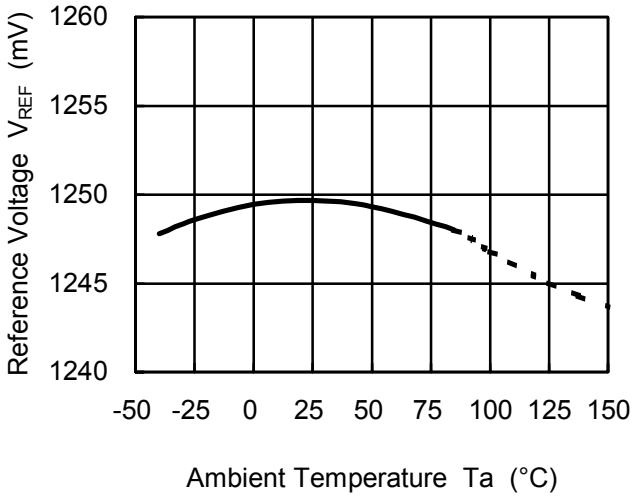


Reference Input Current vs. Temperature
(I_K=1mA,R1=10kΩ,R2=∞)

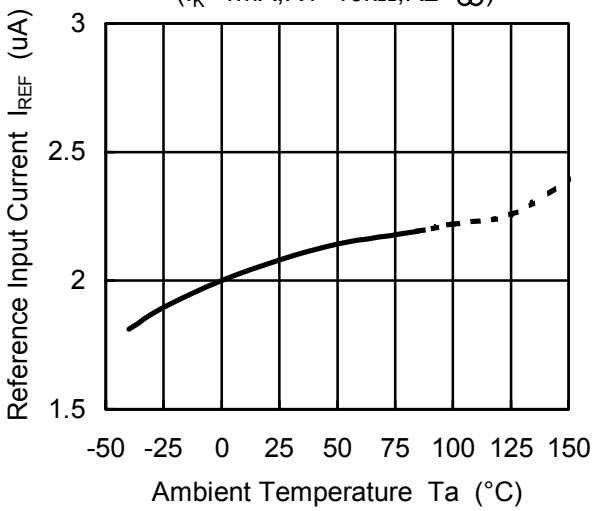

Cathode Current (Off Cond.) vs. Temperature
(V_{KA}=13V,V_{REF}=0V)

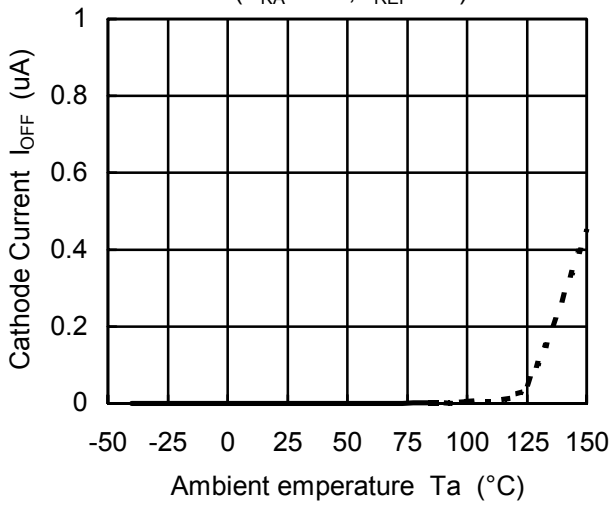

Output Noise Voltage vs. Temperature
(I_K=1mA,V_{KA}=V_{REF})

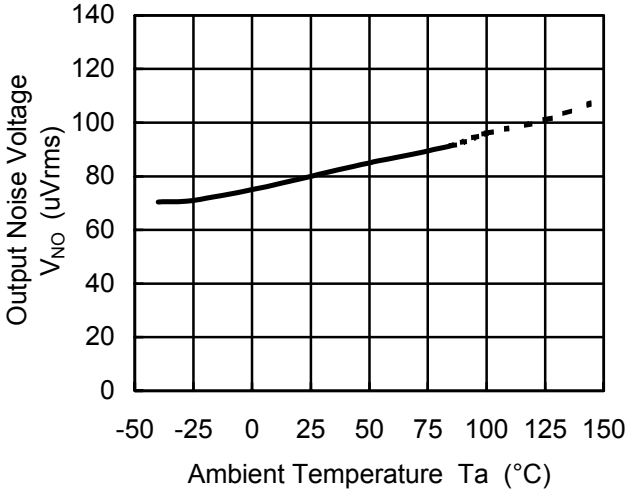

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Nisshinbo Micro Devices:

NJM072CAG-TE2 RP202K181D-TR RP509Z312B-E2-F NJM2747V-TE1 NJM2902V-TE1 NJU3711AV-TE1 NJU7181RB1-TE1 NJW4107U3-05B-TE1 R1154N080B-TR-FE R3111N421C-TR-FE RP109L331D-TR RP131S401B-E2-FE NJM2745V-TE1 NJU7222U50-TE1 R3112Q281A-TR-FE R5486K113CG-TR NJM2377V-TE1 NJM2885DL1-33-TE1 R3112N101A-TR-FE R3119N085E-TR-FE RP509Z182B-E2-F NJM2904CRB1-TE1 NJW4153U2-A-TE2 RP605K333B-TR NJM2794RB2-TE1 NJM7824FA NJW4832KH1-A-TE3 R1111N501B-TR-FE R5487L311KP-TR R5541K001D-E2