
THT Current Sense Transformers & Inductors

REG.-Nr. 1457

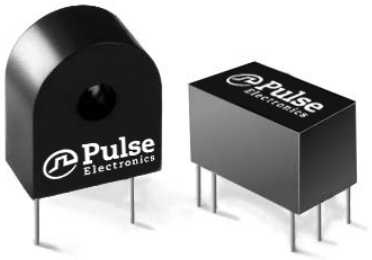

- *VDE Approved*
- *Designed for switching power supply applications*
- *Transformer meets EN62368-1 insulation requirements*
- *Frequency range from 20kHz to 200kHz*

Electrical Specifications @ 25°C – Operating Temperature -40°C to +125°C


Part Number Transformer with 2-1 T Primaries	Schem. Figure	Part Number Transformer with 1T Primary	Schem. Figure	Part Number Inductor without Primary	Schem. Figure	Turns Ns	Secondary Inductance MH (MIN)	Secondary Inductance Test Voltage (15.75 KHz)	RS (Ω MAX)	RT (Ω MAX)	Primary Unipolar Amp μ Sec. Rating (MAX)	Primary Bipolar Amp μ Sec. Rating (MAX)
——	1C	**PE-63586NL**	1A	**PE-51686NL**	2A	50	5.0	0.5	0.7	50	150	300
PE-64487NL	1C	**PE-63587NL**	1A	**PE-51687NL**	2A	100	2.0	1.0	1.40	100	300	600
PE-64488NL	1C	**PE-63588NL**	1A	**PE-51688NL**	2A	200	80.0	2.0	4.50	200	600	1200
PE-64517NL	1D	——	——	**PE-51717NL**	2B	50CT	5.0	0.5	0.7	50	150	300
PE-64518NL	1D	**PE-63618NL**	1B	**PE-51718NL**	2B	100CT	20.0	1.0	1.40	100	300	600
PE-64519NL	1D	**PE-63619NL**	1B	**PE-51719NL**	2B	200CT	80.0	2.0	4.50	200	600	1200
——	——	**PE-63691NL**	1B	——	——	300CT	180.0	3.0	11.0	300	900	1800

Notes:


1. Maximum ratings specified with rated secondary terminating resistance and 1 turn primary.
2. Amp-microsend (AμSec.) rating of primary equalts volt microsend (VμSec.) rating of secondary when secondary is terminated in rated resistance. (Amp - microsends is equal to the product of a square pulse of current in amps, times the current pulse width in microseconds.
3. Maximum operating temperature 105°C (ambient plus rise).
4. When terminated with rated terminating resistance, the inductor scale factor is Vout = 1 volt per amp. for center tapped units terminating resistance for each half of winding is listed value divided by two.
5. 1 turn primary peak sense current is 20 amps for all parts listed above.

Mechanicals

PE-XXXXX

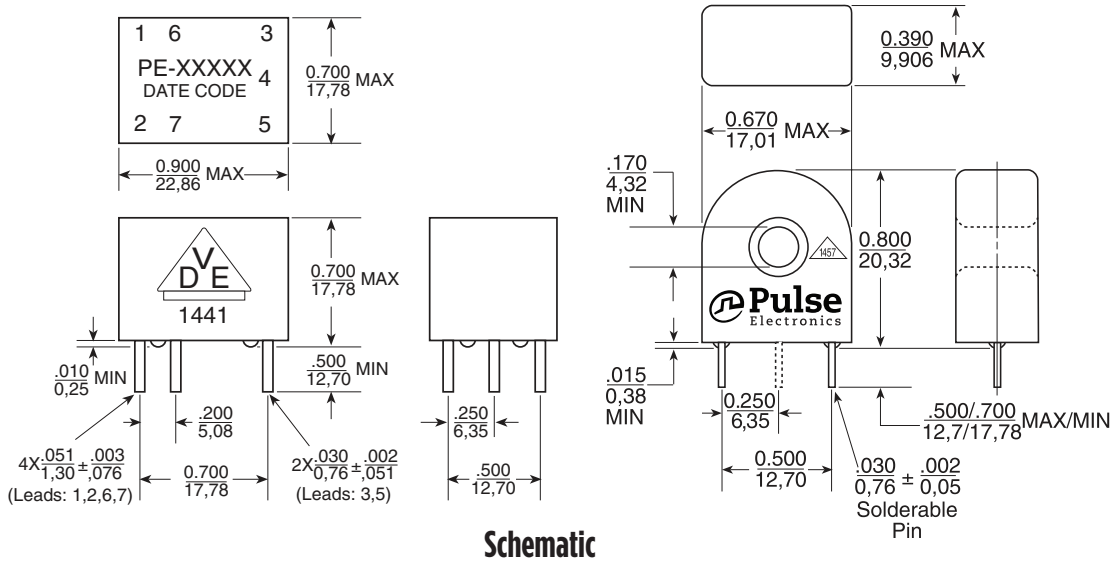

Schematic

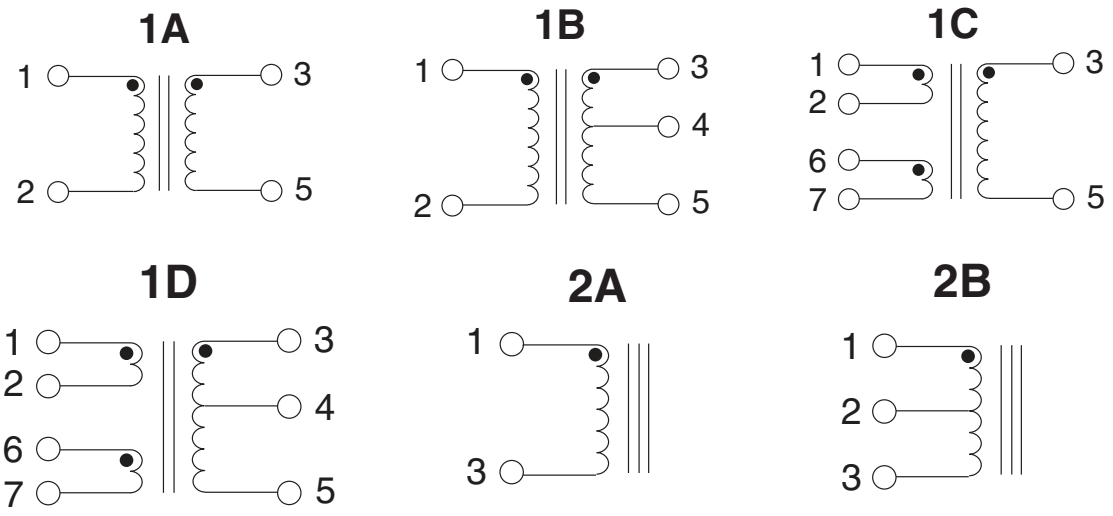

For More Information

Pulse Worldwide Headquarters
15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe
Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Pulse China Headquarters
Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen, P.R.
China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
3 Fraser Street
0428 DUO Tower
Singapore 189352

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia
1F, No.111
Xiyuan Road
Zhongli District
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Pulse Electronics:

PGL6395.121HLT W1902 BSPQ000603041N4B00 P0585NL PA4341.221NLT BSPQ000603043N0B00 PA2744NL PA4320.104NLT PA4341.301NLT PA4343.451NLT PAT6261.003NLT PD380-4000S1NF W3078 ANT1204F007R0870A AWCS0012070736NJ00 BDHE002520122R2MQ1 JXD0-2015NL PD617-6000M243 PG2290.151HLT W1093 PA4343.361NLT BBUP00201209121Y00 W3334B0150 PE-68386NLT DPX1608LKF3R2460A PA0369NL PA4320.334NLT PE-67100NL E5J88-032-02-L JXD2-0Z10NL