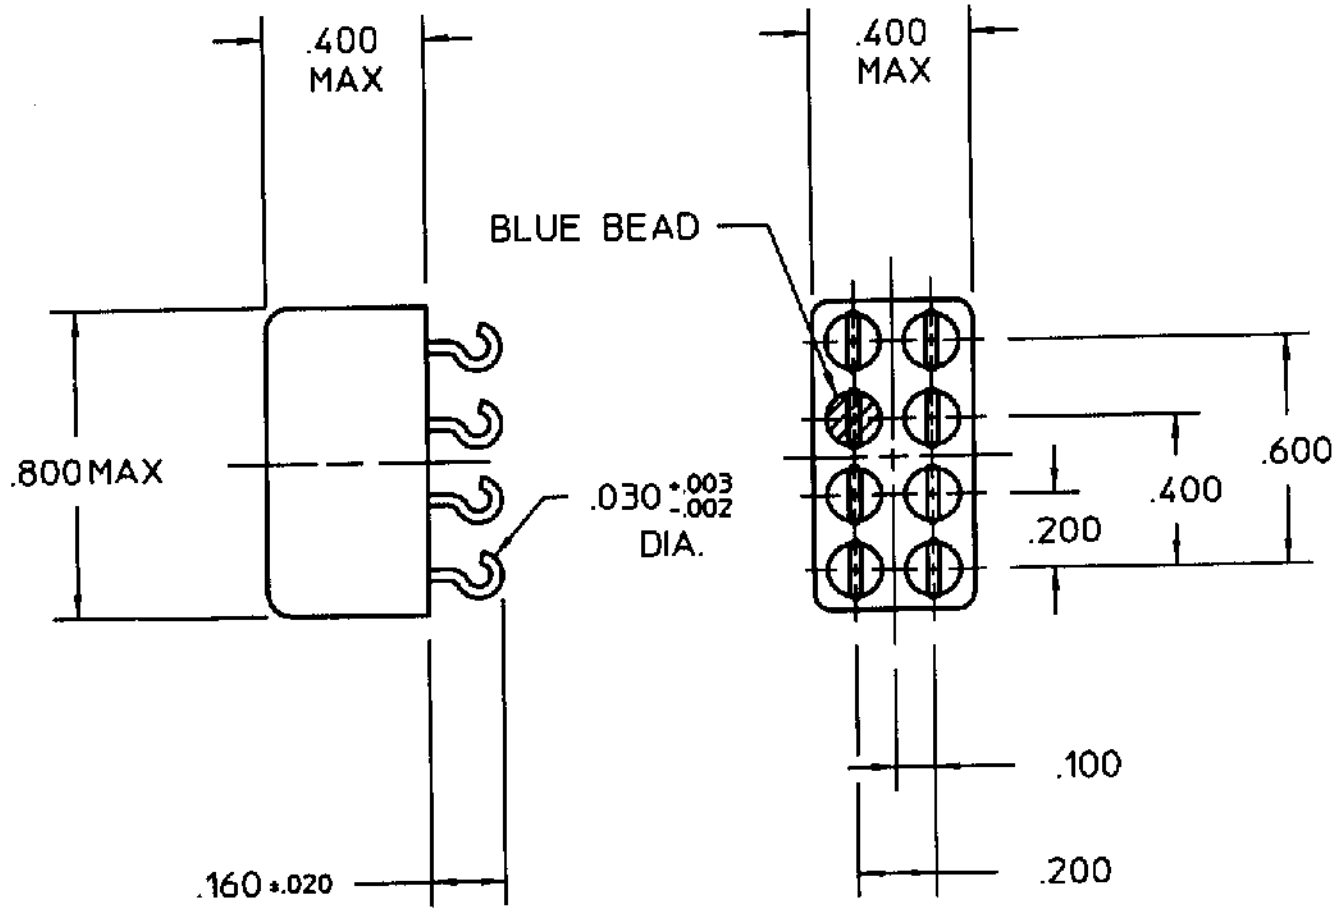


REV. 1 1/25/94

COIL: @ +25 ° C

RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	20.0-30.0 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.0 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

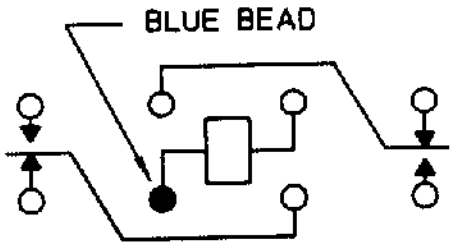

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/3/92 CK. 1/25/94

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAV5002H1

TYPE "HFW" RELAY

HFW1101K13

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

141991-2 2005330-1 CRGCQ2010J3K3 1-962915-1 917696-1 RH73H2A40MKTN ROX05SJ18R SBCHE154R7K 1-794222-0 175977-2 SBCHE64R7K U5254-000005-030PA 1743455-2 1903112-2 2377783-2 1393431-1 2834055-1 3430B2F51RTDF TE50BR39J 1969656-1 2310537-1 MPT100C18RF 3631B101LL CPF0402B37K4E1 SMW73R0JT 2-292161-3 2380312-2 3-1393225-0 650075-000 936348-1