Features

- ESD Protect for 4 high-speed I/O channels
- Provide ESD protection for each channel to
  IEC 61000-4-2 (ESD) ±15kV (air), ±15kV (contact)
  IEC 61000-4-4 (EFT) (5/50ns) 40A
  IEC 61000-4-5 (Lightning) (8/20μs) 5.5A
- For low operating voltage applications: 5V, 4.2V, 3.3V, 2.5V
- Low capacitance : 1.0pF typical
- Fast turn-on and Low clamping voltage
- Array of surge rated diodes with internal equivalent TVS diode
- Small package saves board space
- Solid-state silicon-avalanche and active circuit triggering technology

Applications

- Video Graphics Cards
- USB2.0 Power and Data lines protection
- Notebook and PC Computers
- Monitors and Flat Panel Displays
- IEEE 1394 Firewire Ports
- SIM ports


Description

AZC099-04S is a high performance and low cost design which includes surge rated diode arrays to protect high speed data interfaces. The AZC099-04S family has been specifically designed to protect sensitive components, which are connected to data and transmission lines, from over-voltage caused by Electrostatic Discharging (ESD), Electrical Fast Transients (EFT), and Lightning.


AZC099-04S is a unique design which includes surge rated, low capacitance steering diodes and a unique design of clamping cell which is an equivalent TVS diode in a single package. During transient conditions, the steering diodes direct the transient to either the power supply line or to the ground line. The internal unique design of clamping cell prevents over-voltage on the power line, protecting any downstream components.

AZC099-04S may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 (± 15kV air, ±8kV contact discharge).
One AZC099-04S can be used to replace 4 BAV99 devices in a 5V application or a lower than 5V application.

Circuit Diagram

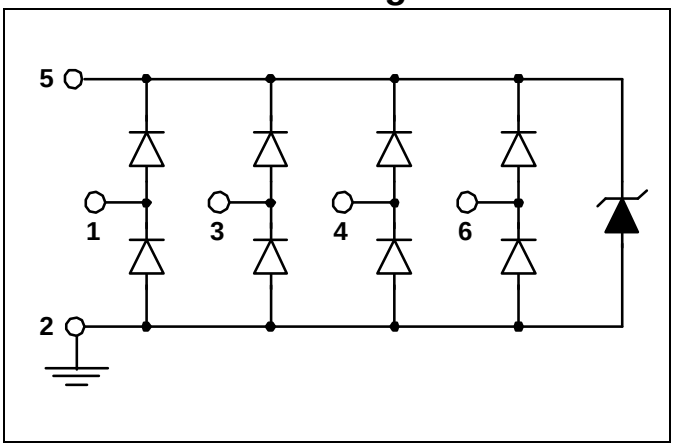

Pin Configuration

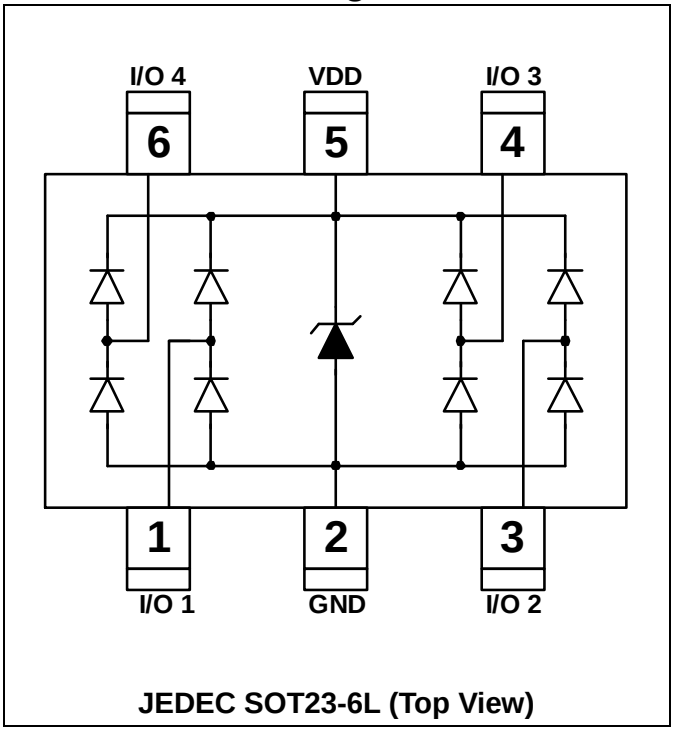

JEDEC SOT23-6L (Top View)


SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS			
PARAMETER	**PARAMETER**	**RATING**	**UNITS**
Peak Pulse Current (tp =8/20μs)	I_{PP}	5.5	**A**
Operating Supply Voltage (VDD-GND)	V_{DC}	6	**V**
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	15 15	**kV**
Lead Soldering Temperature	T_{SOL}	260 (10 sec.)	**°C**
Operating Temperature	T_{OP}	-55 to +85	**°C**
Storage Temperature	T_{STO}	-55 to +150	**°C**
DC Voltage at any I/O pin	V_{IO}	(GND – 0.5) to (VDD + 0.5)	**V**


ELECTRICAL CHARACTERISTICS						
PARAMETER	**SYMBOL**	**CONDITIONS**	**MIN**	**TYP**	**MAX**	**UNITS**
Reverse Stand-Off Voltage	V_{RWM}	Pin 5 to pin 2, T=25 °C			5	**V**
Reverse Leakage Current	I_{Leak}	V_{RWM} = 5V, T=25 °C, Pin 5 to pin 2			2	**μA**
Channel Leakage Current	I_{CH_Leak}	$V_{Pin\ 5}$ = 5V, $V_{Pin\ 2}$ = 0V, T=25 °C			1	**μA**
Reverse Breakdown Voltage	V_{BV}	I_{BV} = 1mA, T=25 °C Pin 5 to Pin 2	6.2			**V**
Forward Voltage	V_F	I_F = 15mA, T=25 °C Pin 2 to Pin 5		0.8	1.2	**V**
Clamping Voltage	V_{CL}	I_{PP}=5A, tp=8/20μs, T=25 °C Any Channel pin to Ground		9	10	**V**
ESD Holding Voltage	V_{hold}	IEC 61000-4-2 +6kV, T=25 °C, Contact mode, Any Channel pin to Ground.		11.5		**V**
Channel Input Capacitance	C_{IN}	V_{pin5} = 5V, V_{pin2} = 0V, **V_{IN} = 2.5V**, f = 1MHz, T=25 °C, Any Channel pin to Ground		1.0	1.2	**pF**
Channel to Channel Input Capacitance	C_{CROSS}	V_{pin5} = 5V, V_{pin2} = 0V, **V_{IN} = 2.5V**, f = 1MHz, T=25 °C , Between Channel pins		0.1	0.12	**pF**
Variation of Channel Input Capacitance	$\triangle C_{IN}$	V_{pin5} = 5V, V_{pin2} = 0V, **V_{IN} = 2.5V**, f = 1MHz, T=25 °C , Channel_x pin to Ground - Channel_y pin to Ground		0.03	0.05	**pF**

Typical Characteristics


Power Derating Curve

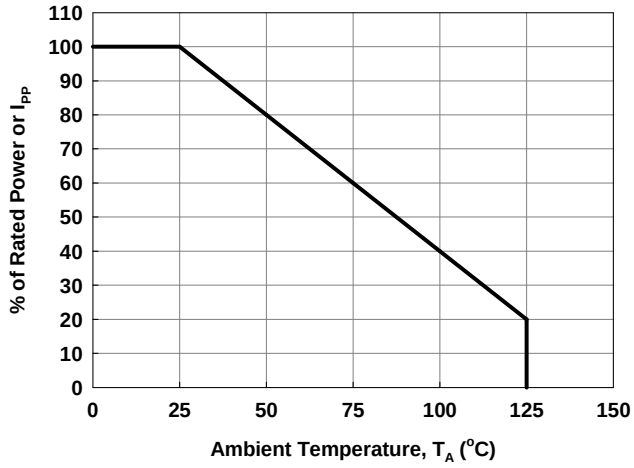


Clamping Voltage vs. Peak Pulse Current

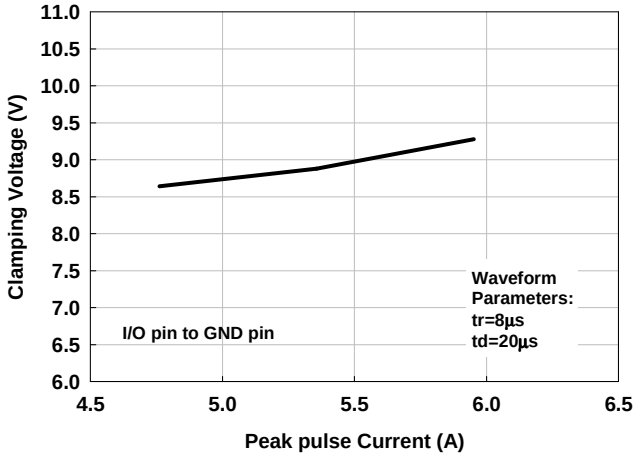


Forward Voltage vs. Forward Current

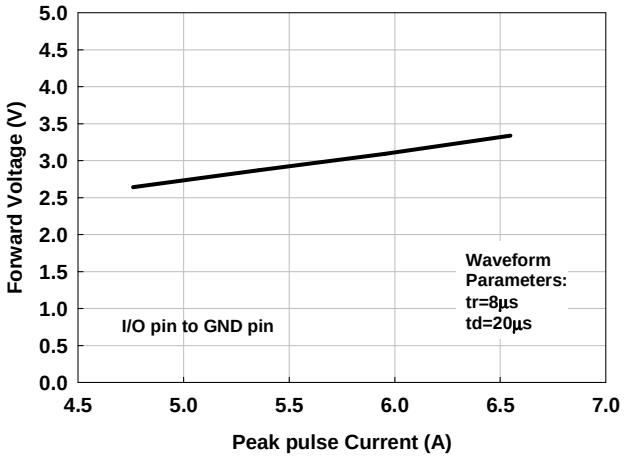

Typical Variation of C_{IN} vs. V_{IN}

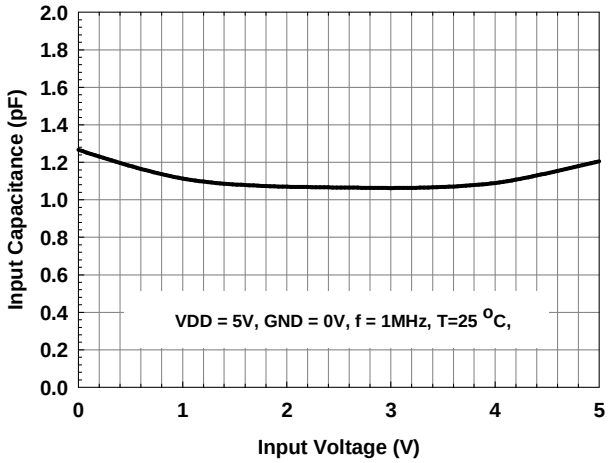

Transmission Line Pulsing (TLP) Measurement

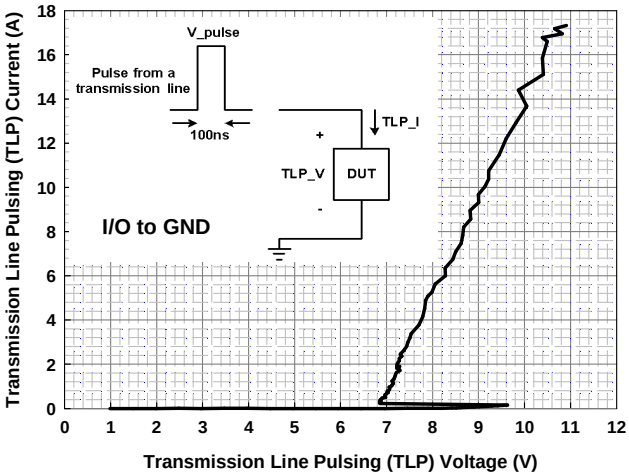

Applications Information

A. Design Considerations

The ESD protection scheme for system I/O connector is shown in the Fig. 1. In Fig. 1, the diodes D1 and D2 are general used to protect data line from ESD stress pulse. If the power-rail ESD clamping circuit is not placed between VDD and GND rails, the positive pulse ESD current (I_{ESD1}) will pass through the ESD current path1. Thus, the ESD clamping voltage V_{CL} of data line can be described as follow:

V_{CL} = Fwd voltage drop of D1 + supply voltage of VDD rail + $L_1 \times d(I_{ESD1})/dt + L_2 \times d(I_{ESD1})/dt$

Where L_1 is the parasitic inductance of data line, and L_2 is the parasitic inductance of VDD rail.

An ESD current pulse can rise from zero to its peak value in a very short time. As an example, a level 4 contact discharge per the IEC61000-4-2 standard results in a current pulse that rises from zero to 30A in 1ns. Here $d(I_{ESD1})/dt$ can be approximated by $\Delta I_{ESD1}/\Delta t$, or 30/(1x10-9). So just 10nH of total parasitic inductance (L_1 and L_2 combined) will lead to over 300V increment in V_{CL}! Besides, the ESD pulse current which is directed into the VDD rail may potentially damage any components that are attached to that rail. Moreover, it is common for the forward voltage drop of discrete diodes to exceed the damage threshold of the protected IC. This is due to the relatively small junction area of typical discrete components. Of course, the discrete diode is also possible to be destroyed due to its power dissipation capability is exceeded.

The AZC099-04S has an integrated power-rail ESD clamped circuit between VDD and GND rails. It can successfully overcome previous disadvantages. During an ESD event, the positive ESD pulse current (I_{ESD2}) will be directed through the integrated power-rail ESD clamped circuit to GND rail (ESD current path2). The clamping voltage V_{CL} on the data line is small and protected IC will not be damaged because power-rail ESD clamped circuit offer a low impedance path to discharge ESD pulse current.

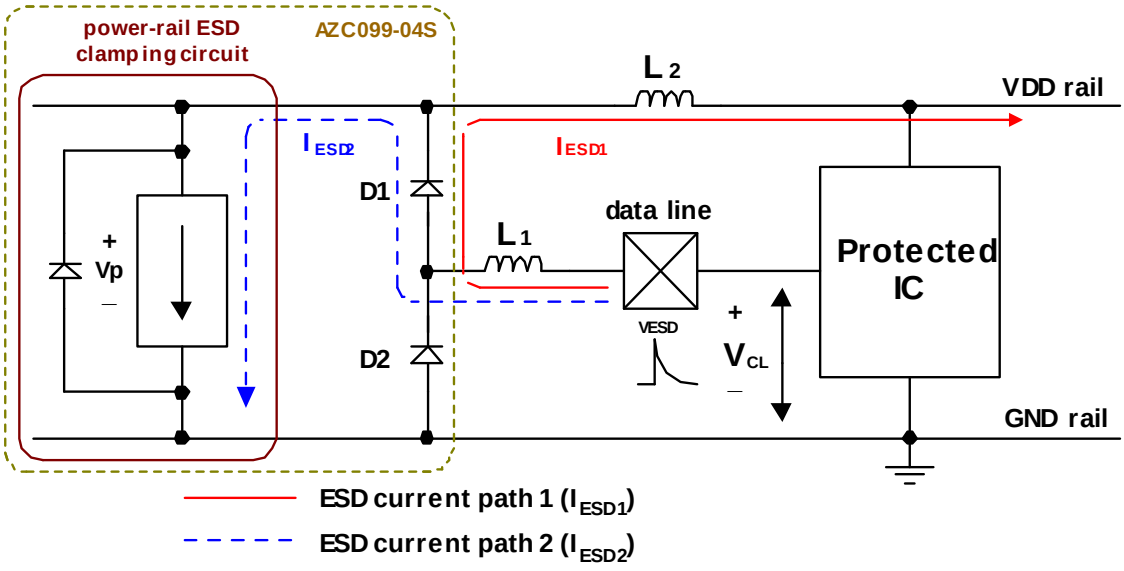


Fig. 1 Application of positive ESD pulse between data line and GND rail.

B. Device Connection

The AZC099-04S is designed to protect four data lines and power rails from transient over-voltage (such as ESD stress pulse). The device connection of AZC099-04S is shown in the Fig. 2. In Fig. 2, the four protected data lines are connected to the ESD protection pins (pin1, pin3, pin4, and pin6) of AZC099-04S. The ground pin (pin2) of AZC099-04S is a negative reference pin. This pin should be directly connected to the GND rail of PCB (Printed Circuit Board). To get minimum parasitic inductance, the path length should keep as short as possible. In addition, the power pin (pin 5) of AZC099-04S is a positive reference pin. This pin should directly connect to the VDD rail of PCB. When pin 5 of AZC099-04S is connected to the VDD rail, the leakage current of ESD protection pin of AZC099-04S becomes very small. Because the pin 5 of AZC099-04S is directly connected to VDD rail, the VDD rail also can be protected by the power-rail ESD clamped circuit (not shown) of AZC099-04S.

AZC099-04S can provide protection for 4 I/O signal lines simultaneously. If the number of I/O signal lines is less than 4, the unused I/O pins can be simply left as NC pins.

In some cases, systems are not allowed to be reset or restart after the ESD stress directly applying at the I/O-port connector. Under this situation, in order to enhance the sustainable ESD Level, a 0.1μF chip capacitor can be added between the VDD and GND rails. The place of this chip capacitor should be as close as possible to the AZC099-04S.

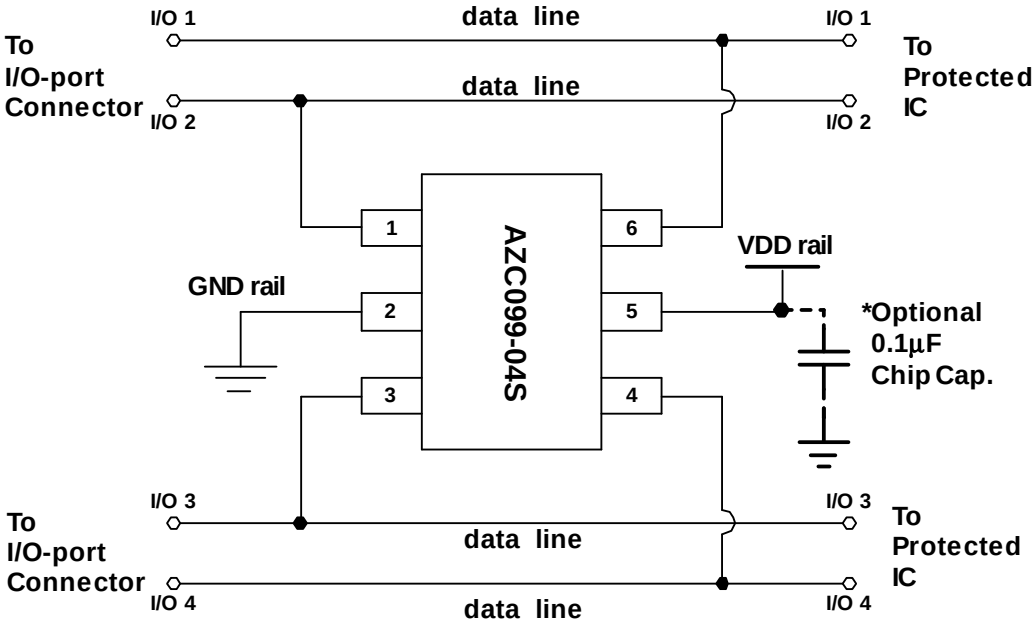


Fig. 2 Data lines and power rails connection of AZC099-04S.

C. Applications

1. Universal Serial Bus (USB) ESD Protection

The AZC099-04S can be used to protect the USB port on the monitors, computers, peripherals or portable systems. The ESD protection scheme for dual USB ports is shown in Fig. 3. In the Fig.3, each device will protect up two USB ports. The voltage bus (V_{BUS}) of USB ports (port1 and port2) are connected to the power pin (pin 5) of AZC099-04S. Each data line (D+/D-) of USB port is connected to the ESD protection pin of AZC099-04S.

When ESD voltage pulse appears on the data line, the ESD pulse current will be conducted by AZC099-04S away from the USB controller chip. In addition, the ESD pulse current also can be conducted by AZC099-04S away from the USB controller chip when the ESD voltage pulse appears on the voltage bus (V_{BUS}) of USB port. Therefore, the data lines (D+/D-) and voltage bus (V_{BUS}) of two USB ports are complementally protected with an AZC099-04S.

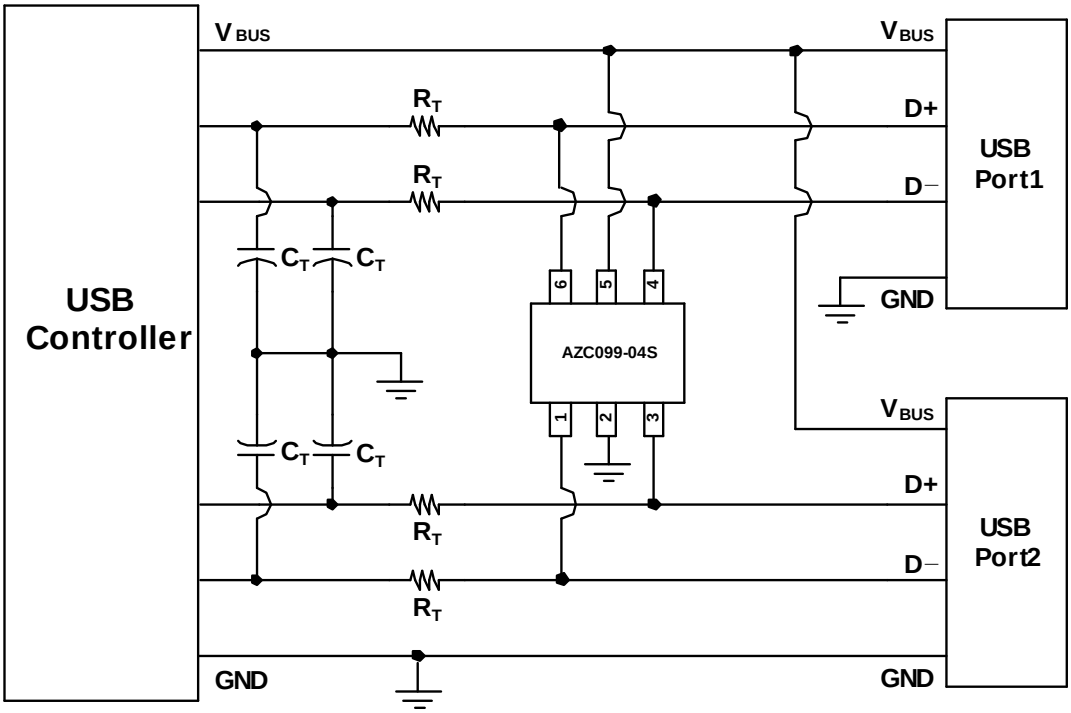


Fig. 3 ESD Protection scheme for dual USB ports by using AZC099-04S.

2. Audio Interface ESD Protection

For the audio interface, the Right/Left channel and TMC terminals should be protected from the ESD stress. The AZC099-04S can be used for the audio interface ESD protection. The ESD protection scheme for audio interface is shown in the Fig. 4. In the Fig. 4, the Right and Left channels of audio connector are connected to ESD protection pins (such as pin 1 and pin 6) of AZC099-04S. In addition, the TMC terminals of audio connector are also connected to ESD protection pins (such as pin 3 and pin 4) of AZC099-04S. For the power pin (pin 5) of AZC099-04S, it should directly connect to the VDD power supply.

When ESD voltage pulse appears on the Right/Left channel or TMC terminals of audio connector, the ESD pulse current will be discharged by AZC099-04S. Therefore, the Right/Left channel and TMC terminals of audio chip are complementally protected with an AZC099-04S.

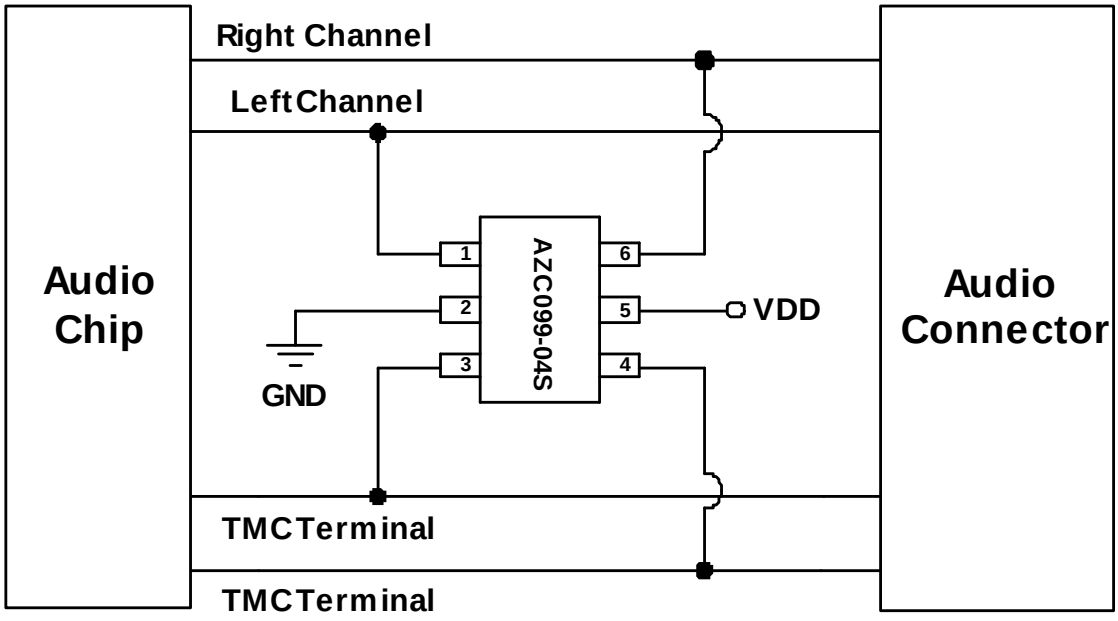


Fig. 4 ESD Protection scheme for audio interface by using AZC099-04S.

3. Video (VGA) Interface ESD Protection

For the video (VGA) interface, the exposed lines such as Red, Green, Blue, H-Sync, V-Sync, DDC CLK, and DDC DAT lines for plug and monitors should be protected from the ESD stress. The AZC099-04S also can be used for the video (VGA) interface ESD protection. The ESD protection scheme for video (VGA) interface is shown in the Fig. 5. In Fig. 5, each exposed line of video interface should connect to the ESD protection pin of AZC099-04S. The power pin (pin 5) of AZC099-04S just directly connected to the VDD power supply.

When ESD voltage appears on the signal line, the ESD pulse current will be discharged by AZC099-04S. Therefore, all exposed lines of video interface are complementally protected with an AZC099-04S.

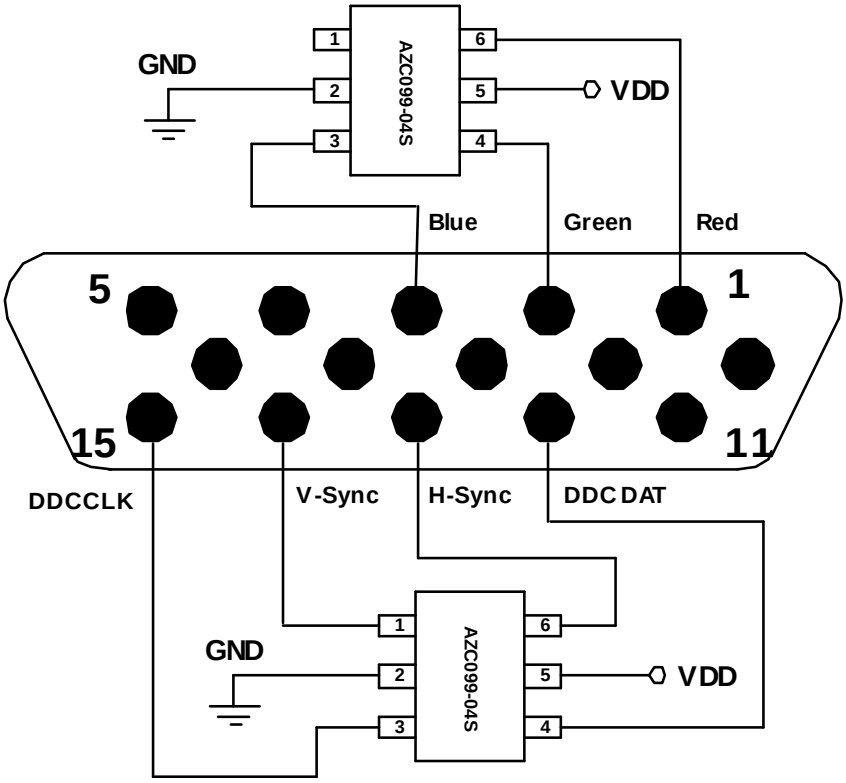


Fig. 5 ESD Protection scheme for video (VGA) interface by using AZC099-04S.

4. SIM Port ESD Protection

The AZC099-04S can be also used to protect the SIM port. The ESD protection scheme for a SIM port is shown in Fig. 6. In the Fig.6, the voltage bus (VCC) of SIM port is connected to the power pin (pin 5) of AZC099-04S. The ground bus (GND) of SIM port is connected to the ground pin (pin 2) of AZC099-04S. The other three signal lines, I/O, Clock, and Reset, are connected three ESD protection pins of AZC099-04S, respectively. The rest ESD protection pin of AZC099-04S is left to be floated.

When ESD voltage pulse appears on the one of the signal lines, the ESD pulse current will be conducted by AZC099-04S away from the controller chip. In addition, the ESD pulse current also can be conducted by AZC099-04S away from the controller chip when the ESD voltage pulse appears on the voltage bus (VCC) of SIM port. Therefore, the signal lines (I/O, Clock, and Reset) and voltage bus (VCC) of the SIM ports are all protected with an AZC099-04S.

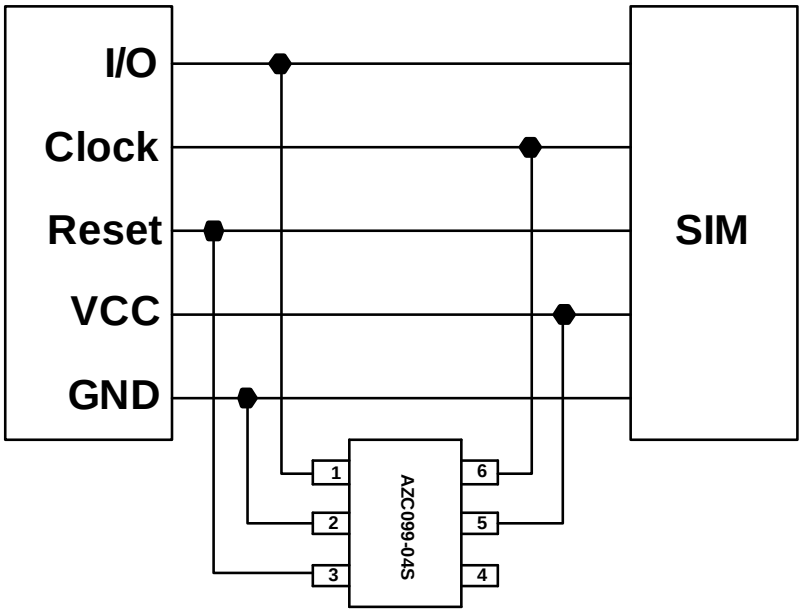



Fig. 6 ESD Protection scheme for SIM port by using AZC099-04S

Mechanical Details


SOT23-6L

PACKAGE DIAGRAMS


TOP VIEW

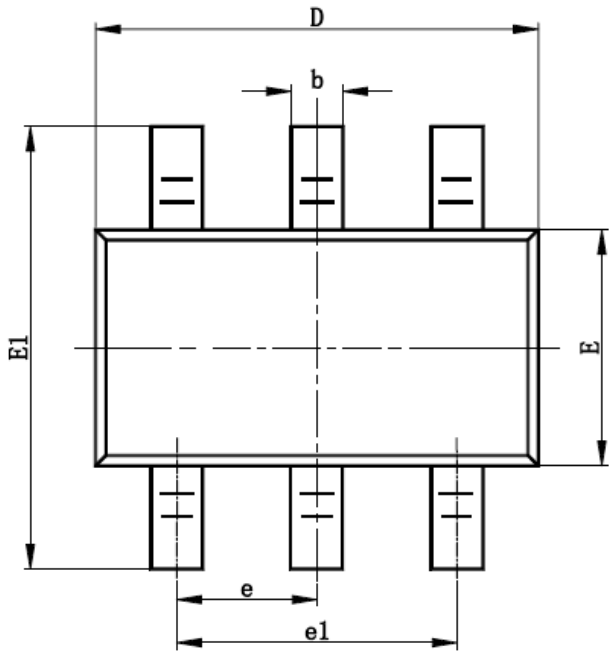

SIDE VIEW

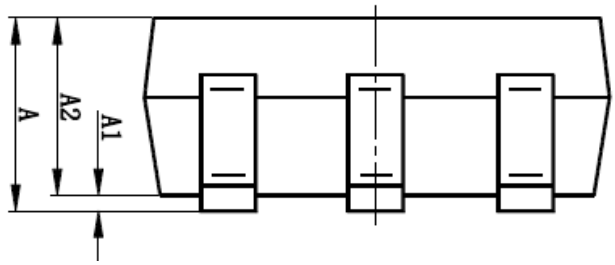

END VIEW

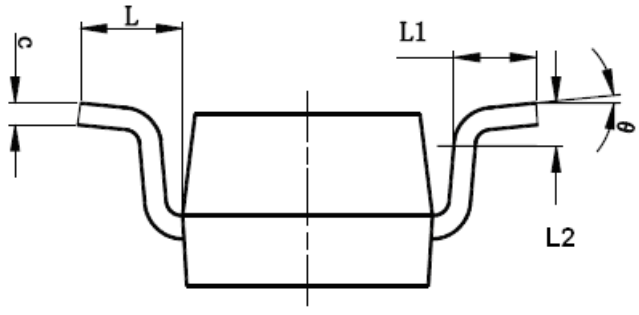


PACKAGE DIMENSIONS

Symbol	Millimeters		Inches	
	MIN.	MAX.	MIN.	MAX.
A		1.45		0.057
A1	0	0.15	0.000	0.006
A2	0.9	1.3	0.035	0.051
b	0.3	0.5	0.012	0.020
c	0.08	0.21	0.003	0.008
D	2.72	3.12	0.107	0.123
E	1.4	1.8	0.055	0.071
E1	2.6	3	0.102	0.118
e	0.95BSC		0.037BSC	
e1	1.9BSC		0.075BSC	
L1	0.3	0.6	0.012	0.024
L	0.7REF		0.028REF	
L2	0.25BSC		0.010BSC	
θ	0	8	0	8

Notes:

- This dimension complies with JEDEC outline standard MO-178 Variation AB.
- Dimensioning and tolerancing per ASME Y14.5M-1994.
- All dimensions are in millimeters, and the dimensions in inches are for reference only.
- 1mm = 40 mils = 0.04 inches.


LAND LAYOUT

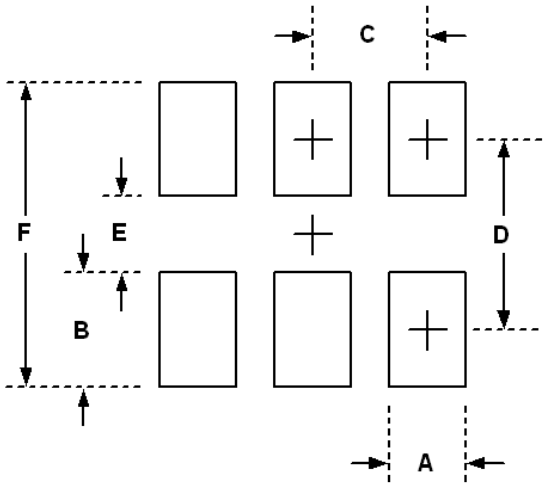

Dimensions		
Index	**Millimeter**	**Inches**
A	0.50~0.60	0.020~0.024
B	1.10	0.043
C	0.95	0.037
D	2.50	0.098
E	1.40	0.055
F	3.60	0.141

Notes:
This LAND LAYOUT is for reference purposes only. Please consult your manufacturing partners to ensure your company's PCB design guidelines are met.

MARKING CODE

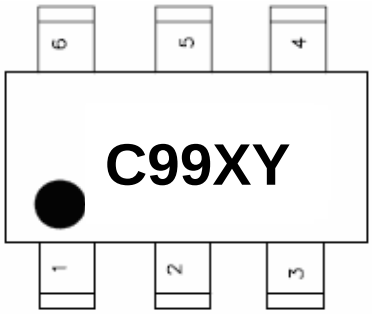

Part Number	Marking Code
AZC099-04S.R7F (ROHS)	C99XY
AZC099-04S.R7G (Green Part)	C96XY

C99 = Device Code
X = Date Code
Y = Control Code

Ordering Information

PN#	Material	Type	Reel size	MOQ/internal box	MOQ/carton
AZC099-04S.R7G	Green	T/R	7 inch	4 reel=12,000/box	6 box=72,000/carton

Revision History

Revision	Modification Description
Revision 2007/02/07	Original Release.
Revision 2007/02/27	Update the V_{ESD} spec in the **ABSOLUTE MAXIMUM RATINGS.**
Revision 2007/05/15	Update the Marking Code from C99X to C99XY.
Revision 2007/10/19	Update the information of Land Layout.
Revision 2008/01/21	Present the Mechanical Details by JEDEC formation.
Revision 2008/03/24	Modify the description in the Features, from “5V operating voltage” to “For low operating voltage applications: 5V, 4.2V, 3.3V, 2.5V”.
Revision 2008/08/01	Add the marking code for Green Part.
Revision 2008/12/26	Update the value of “Index A” in the Land Layout.
Revision 2009/12/16	Modify the indication of Marking Code.
Revision 2010/08/16	Add the tolerances to the package dimensions of “D” and “E”.
Revision 2010/08/23	Update the PACKAGE DIMENSIONS.
Revision 2011/07/30	1. Update the Company Logo. 2. Add the Ordering Information.
Revision 2013/08/27	1. Update the level of ESD per IEC 61000-4-2 . 2. Update the level of EFT per IEC 61000-4-4 . 3. Update the **TYP** value of ESD Holding Voltage.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amazing Microelectronic:

AZ9812-01F AZ1043-08F AZ2015-05R AZ3205-01F AZ5725-01F AZ5123-01F.R7G AZC199-02S.R7G AZ1045-04F.R7G AZ5125-01H.R7G AZ1023-04F AZ1065-06F AZ1143-04F.R7G AZ4514-01F AZ5013-01F AZ1015-02N AZ1065-06Q AZ5725-01F.R7G AZ9113-04S AZ1023-02F AZ3105-01F AZ3125-08F AZ5825-01F.R7GR AZC199-04S.R7G AZ1045-08F AZ3028-04P AZ3133-08F AZ5123-01F.R7GR AZ9707-01F AZ1065-06F.R7G AZ3133-04F