This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

1 Electrical


1.1 Impedence	50 Ω
1.2 Frequency	DC~6GHz
1.3 Dielectric withstanding voltage	1500V(volts RMS)
1.4 Center contact resistance	≤ 1.5MΩ
1.5 Outer contact resistance	≤ 0.2MΩ
1.6 Insulation resistance:	≥5000MΩ


2 Environmental&Mechanical

2.1 Temperature range	-40℃~+85℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass; Nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Bronze, Gold plated
3.4 Nut:	Brass, Nickel plated
3.5 Gasket:	Silicon Rubber (red color)
3.6 Washer	Brass, Nickel plated

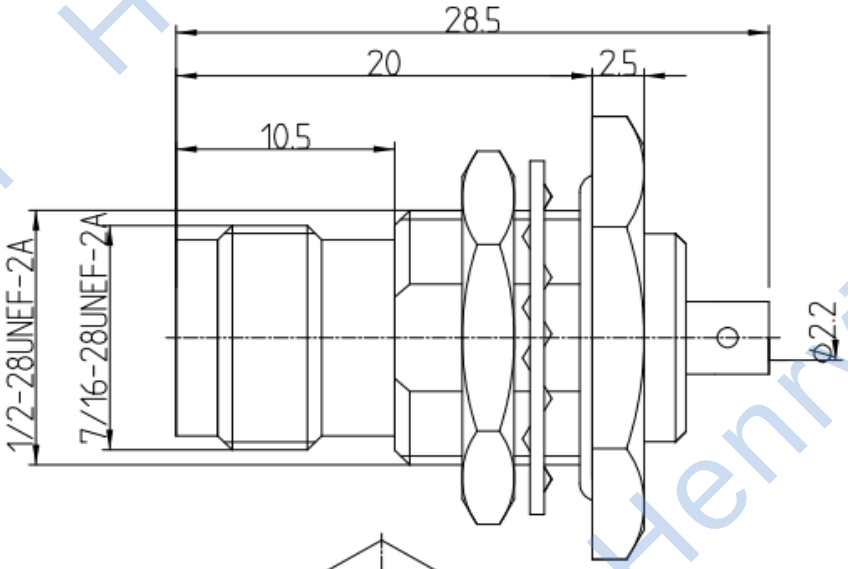

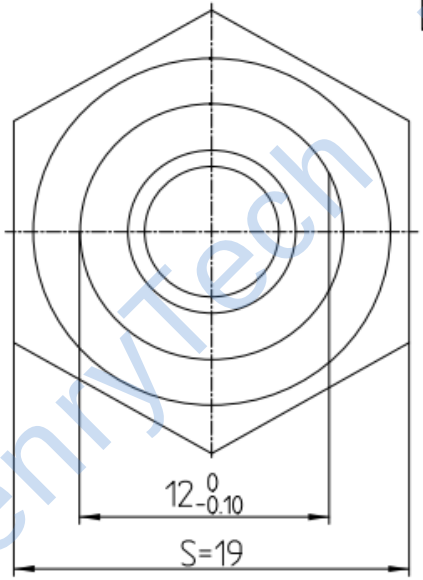

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector TNC Female B/H Conn. for RG405 Cable				
ENGINEER: L. yu 19/03/17					
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50, .X ±0.20, .XX ±0.10, ANGLES ±1°		HenryTech			
	PART NO: HL-TNC-KYB2	DIMENSION IN MILLIMETERS (mm)	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

H3-MAPD-008109-C30040 H3-TC1-1TG2+ HL-N-KKC HN-DC2016-0.5(12-4.6)M HT-LFCG-530+ HX-N-JK HG-SCN-2-22+ HL-SMA/SMB-KK HT-HFCN-3800+ HX-SMA/SMP-JK H3-MABA-010551-CF1071 HLCC2250G HT-LFCN-3800+ HT-LFCN-400+ HT-SCA-4-10+ HT-HFCN-2700+ HX-1.85-JJ HT-QCN-19+ HG-SCN-2-65+ HN-LP7-0.5-1.27(9.4-2.8) HT-BFHKI-1572+ HT-LFCG-1700+ HL-MCX-KE-02 HL-SMA-KHD4 HL-SMAMF-2-18-15dB HL-SMB-K3DY H3-MABA-011085 HL-SSMA-KHD-1 H2SYDC-20-62HP+ H3-MABA-007871-CT1A40