
SN74ABT16240
16-BIT BUFFER/DRIVER WITH 3-STATE OUTPUTS

SCBS346 – MAY 1994

- **Member of the Texas Instruments *Widebus*™ Family**
- **State-of-the-Art *EPIC*-II*B*™ BiCMOS Design Significantly Reduces Power Dissipation**
- **Latch-Up Performance Exceeds 500 mA Per JEDEC Standard JESD-17**
- **Typical V_{OLP} (Output Ground Bounce) < 1 V at V_{CC} = 5 V, T_A = 25°C**
- **Distributed V_{CC} and GND Pin Configuration Minimizes High-Speed Switching Noise**
- **Flow-Through Architecture Optimizes PCB Layout**
- **High-Drive Outputs (–32-mA I_{OH}, 64-mA I_{OL})**
- **Packaged in Plastic 300-mil Shrink Small-Outline (SSOP) Packages**

DL PACKAGE
(TOP VIEW)

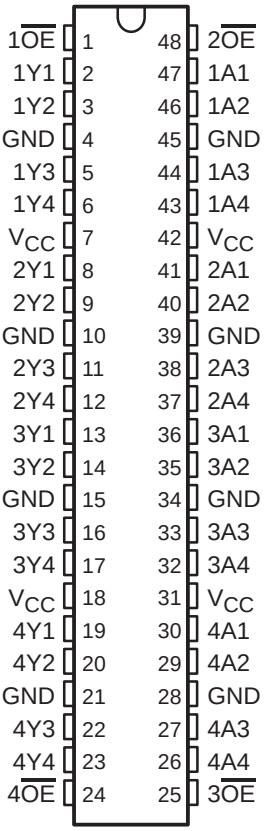

description

The SN74ABT16240 is a 16-bit buffer and line driver designed specifically to improve both the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters. The device can be used as four 4-bit buffers, two 8-bit buffers, or one 16-bit buffer. This device provides inverting outputs and symmetrical active-low output-enable ($\overline{OE}$) inputs.

To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

The SN74ABT16240 is available in TI's shrink small-outline package (DL), which provides twice the I/O pin count and functionality of standard small-outline packages in the same printed-circuit-board area.

The SN74ABT16240 is characterized for operation from –40°C to 85°C.

FUNCTION TABLE
(each 4-bit buffer)


INPUTS		OUTPUT
$\overline{OE}$	A	Y
L	H	L
L	L	H
H	X	Z

Widebus and EPIC-IIB are trademarks of Texas Instruments Incorporated.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1994, Texas Instruments Incorporated

logic diagram (positive logic)

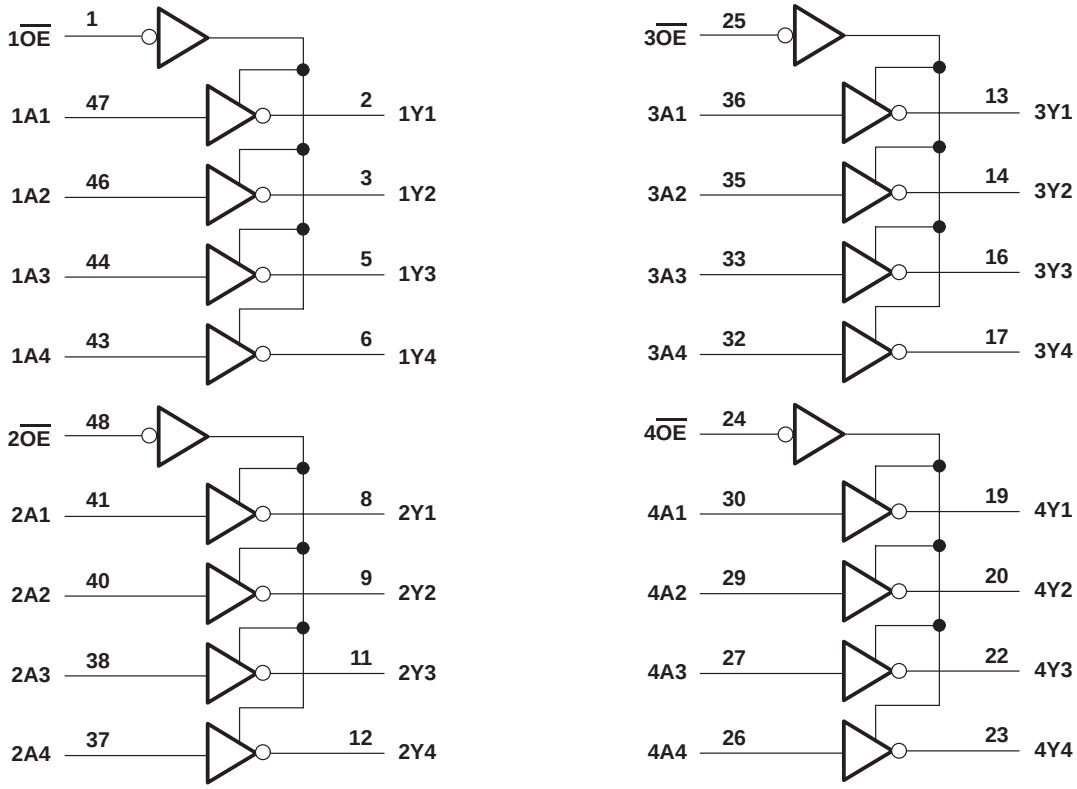

SPICE block diagram

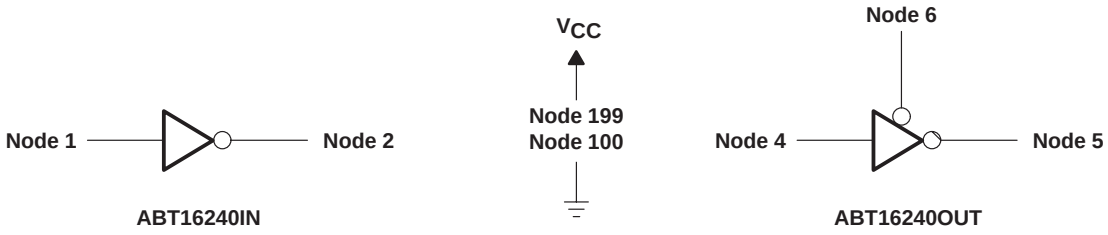

SPICE FUNCTION TABLE

NODE		OPERATION	NODE			OPERATION
1	2		4	5	6	
L	H	Input	L	H	L	Output
H	L	Input	H	L	L	Output
			X	Z	H	Hi-Z

SPICE netlist

```
*    ABT16240 SPICE I/O MODEL SUBCIRCUIT
*    ADVANCED BUS INTERFACE
*    ADVANCED SYSTEM LOGIC, TEXAS INSTRUMENTS
*
*    SUBCIRCUITS:  ABT16240IN, ABT16240OUT
*
*    PACKAGE PARASITICS
       .LIB 'PKGS.LIB'   SSOP48
*
*    PROCESS MODELS
       .LIB 'EPIC2B.LIB' NOMINAL_L13
*      .LIB 'EPIC2B.LIB' STRONG_L13
*      .LIB 'EPIC2B.LIB' WEAK_L13
*
* ABT16240 INPUT SUBCIRCUIT
*    NODES:              INPUT NODE
*                        |     INTERNAL OUTPUT NODE
*                        |     |     VCC
*                        |     |     |     GND
*                        |     |     |     |
.SUBCKT ABT16240IN       1     2     199   100
 X_PKGIN           1     1001                    SSOP48_47
 X_PKGVCC          199   1199                    SSOP48_07
 X_PKGGND          100   1100                    SSOP48_04
 XABT16240IN       1001  2     1199  1100        ABT16240__IN
.ENDS ABT16240IN
*
* ABT16240 OUTPUT SUBCIRCUIT
*    NODES:              INTERNAL INPUT NODE
*                        |     OUTPUT NODE
*                        |     |     INTERNAL OE NODE
*                        |     |     |     VCC
*                        |     |     |     |     GND
*                        |     |     |     |     |
.SUBCKT ABT16240OUT      4     5     6     199   100
 X_PKGOUT          5     1005                    SSOP48_02
 X_PKGVCC          199   1199                    SSOP48_07
 X_PKGGND          100   1100                    SSOP48_04
 XABT16240OUT      4     1005  6     1199  1100  ABT16240__OUT
.ENDS ABT16240OUT
*
.SUBCKT ABT16240__IN     501   502   599   500
 XP1         502   504   506   599   PM          WP=200U     LP=0.8U
 XP2         509   502   599   599   PM          WP=20U      LP=0.8U
 XP3         506   509   599   599   PM          WP=85U      LP=0.8U
 XP4         508   500   599   599   PM          WP=50U      LP=0.8U
 XN1         502   504   500   500   NM          WN=220U     LN=0.8U
 XN2         509   502   500   500   NM          WN=20U      LN=0.8U
 XN4         599   500   508   500   NM          WN=20U      LN=0.8U
 QA          599   508   507         Q2_NPN      10
 QB          599   507   506         Q5_NPN      60
 Q_ESD1      501   500   500         Q7_NPN      200
 Q_ESD       504   505   500         Q5_NPN      46
 XR1         506   507   507   507   RMOS        WR=4U       RES=6K
 RESD1       501   504                           50
 RESD2       505   500                           1K
 CBP         501   500                           0.3P
 CL          502   500                           0.2P
.ENDS ABT16240__IN
*
.SUBCKT ABT16240__OUT    601   602   603   699   600
 XP1         605   603   699   699   PM          WP=200U     LP=0.8U
 XP4         601   603   621   699   PM          WP=40U      LP=0.8U
 XP5         613   601   605   699   PM          WP=30U      LP=0.8U
 XP10        618   603   699   699   PM          WP=50U      LP=0.8U
 XP11        607   612   605   699   PM          WP=60U      LP=0.8U
 XN1         607   601   608   600   NM          WN=100U     LN=0.8U
```

SPICE netlist (continued)

```
XN2          606   619   607   600   NM          WN=50U      LN=0.8U
XN3          608   609   600   600   NM          WN=25U      LN=0.8U
XN4          608   603   600   600   NM          WN=80U      LN=0.8U
XN6          613   603   600   600   NM          WN=25U      LN=0.8U
XN7          602   621   600   600   NM          WN=100U     LN=0.8U
XN8          621   603   600   600   NM          WN=10U      LN=0.8U
XN9          601   622   621   600   NM          WN=20U      LN=0.8U
XN10         619   619   620   600   NM          WN=25U      LN=0.8U
XN11         620   604   602   600   NM          WN=25U      LN=0.8U
XN12         613   601   600   600   NM          WN=40U      LN=0.8U
QM1          616   615   602         Q9_NPN      200
QM2          602   608   600         Q11_NPN     600
QM3          614   613   615         Q4_NPN      15
QD4          614   614   616         Q2_NPN      8
QDR1         615   615   613         Q2_NPN      8
D1           613   614               D1_GDS      156
D2           699   617               D9_GSD      4700
XR1          606   605   605   605   RMOS        WR=6U       RES=1K
XR2          607   606   606   606   RMOS        WR=4U       RES=3K
XR3          614   605   605   605   RMOS        WR=6U       RES=1K
R4           616   617                           10
XR10         619   618   618   618   RMOS        WR=3U       RES=20K
XPVREF       670   603   699   699   PM          WP=50U      LP=0.8U
XNVREF       671   671   600   600   NM          WN=30U      LN=0.8U
XRVREF1      604   670   670   670   RMOS        WR=3U       RES=20K
XRVREF2      671   604   604   604   RMOS        WR=3U       RES=1.5K
XNCLAMP      673   612   674   600   NM          WN=250U     LN=0.8U
DCLAMP1      608   673               D6_GSD      800
DCLAMP2      674   602               D6_GSD      800
XPNOR1       675   609   699   699   PM          WP=30U      LP=0.8U
XPNOR2       612   611   675   699   PM          WP=30U      LP=0.8U
XNNOR1       612   611   600   600   NM          WN=6U       LN=0.8U
XNNOR2       612   609   600   600   NM          WN=6U       LN=0.8U
XP_INV1      609   601   699   699   PM          WP=20U      LP=0.8U
XN_INV1      609   601   600   600   NM          WN=10U      LN=0.8U
XP_INV2      622   603   699   699   PM          WP=15U      LP=0.8U
XN_INV2      622   603   600   600   NM          WN=5U       LN=0.8U
XP_INV3      610   603   699   699   PM          WP=4U       LP=0.8U
XN_INV3      610   603   600   600   NM          WN=4U       LN=0.8U
XP_INV4      611   610   699   699   PM          WP=4U       LP=0.8U
XN_INV4      611   610   600   600   NM          WN=4U       LN=0.8U
CBP          602   600                           0.3P
.ENDS ABT16240__OUT
*
```

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Texas Instruments:

MSP430G2332IN20 OPA2541BM SN74LVCZ240APW TPS92200D2DDCR MSP430F5172IRSBT
TPA6203A1DRBR UCC27210DR ISO124U/1K PCM56U TPS7A8018DRBR BQ24314DSGR
LMV358MMX/NOPB MSP430F2112TRHBT OPT3101RHFR MSP430F5131IDA SN75LV4735DBLE
TCAN332DR CC2520RHDR DS90C383MTDX/NOPB MSP430F47127IPZ SN74GTL2006PWR
TLV990-28PFB MSP430G2403IPW28 OPA643P TPS51125ARGER ADS8344E TLC085CDR
TPS71710DCKR UA9637ACPS MSP430F2001TRSAT