

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/05	


APPROVED: _____


DATE: _____ TITLE: _____

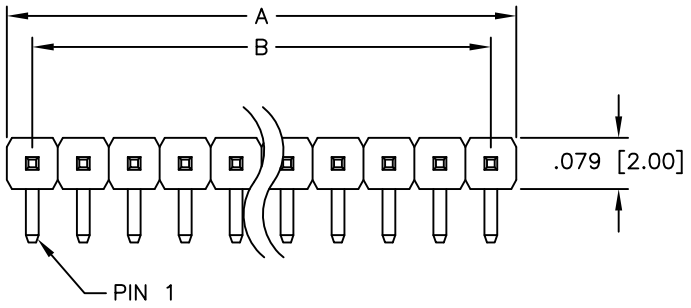

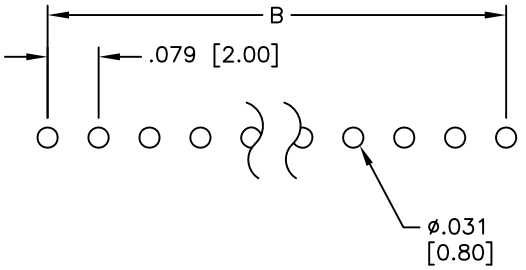

RECOMMENDED
PCB LAYOUT

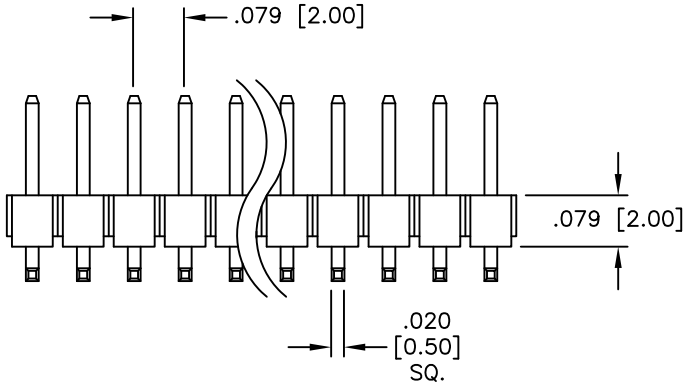

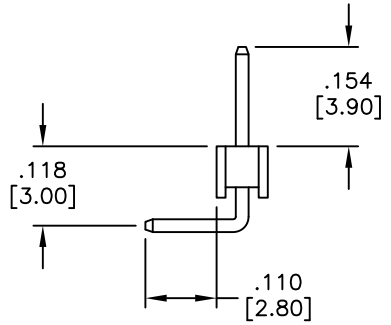

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/31/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SINGLE ROW PIN HEADER
RIGHT ANGLE, GOLD PLATED

SIZE	PART NO.	REV.
X	2PH1R-XX-UA	-

REF: | SCALE: NTS | SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ADAM TECH:

25CH-B-07 EBJA-04-C-BK ESMC-F-80-SGS-SMT-B-PP-T/R MMI-P1PG10SGG52 MTJ-88AX1-FSN-LH-M4S SD-PNN10-MMLAL-S00-000 2PH1-16-UA-SMT-B ICM-316-1-GT-HT PH1-20-U-A SW-PB7-1Z-A-RG-H-3-G2A EBSA-02-A ICS640T PLCC-52-AT RF55-29L-T-00-50-G-SH SPH2-16-U-SMT 1CH-A-10 BHR-20-VUA EB163A-05-C-180 PH1RB-02-UA RF1-07-T-00-75 SW-PB7-07LB42CRRG12V BHR-10-VUA CDH-11 DB25-PT-1BLJS PH1RA-03-UA DA15-PT-2 DMF-02-S MDJ-009-FS SMC-2-08-1-GT SW-PB8-AA00B2GE-2