




Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

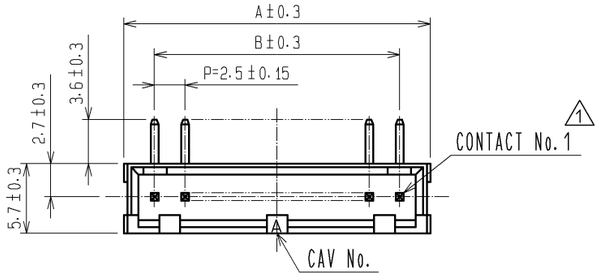

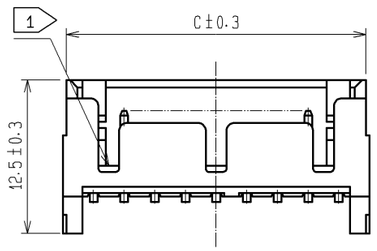


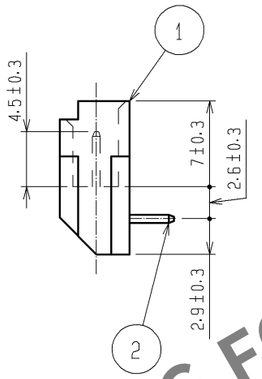

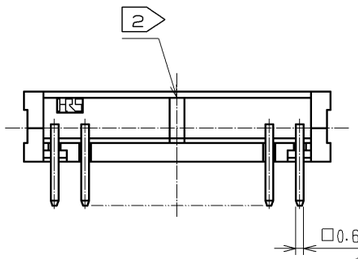



RECOMMENDED PATTERN(5:1)

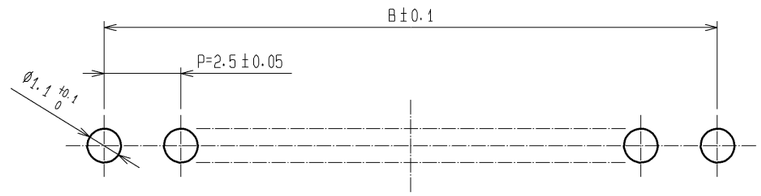

HRS DRAWING FOR REFERENCE

CODE NO.	PART NO.	CONTACT	A	B	C
CL541-2034-0-00	DF1BZ- 2P-2.5DS	2	7.5	2.5	6.9
CL541-2035-2-00	DF1BZ- 3P-2.5DS	3	10.0	5.0	9.4
CL541-2036-5-00	DF1BZ- 4P-2.5DS	4	12.5	7.5	11.9
CL541-2037-8-00	DF1BZ- 5P-2.5DS	5	15.0	10.0	14.4
CL541-2038-0-00	DF1BZ- 6P-2.5DS	6	17.5	12.5	16.9
CL541-2039-3-00	DF1BZ- 7P-2.5DS	7	20.0	15.0	19.4
CL541-2040-2-00	DF1BZ- 8P-2.5DS	8	22.5	17.5	21.9
CL541-2041-5-00	DF1BZ- 9P-2.5DS	9	25.0	20.0	24.4
CL541-2042-8-00	DF1BZ-10P-2.5DS	10	27.5	22.5	26.9
CL541-2043-0-00	DF1BZ-11P-2.5DS	11	30.0	25.0	29.4
CL541-2044-3-00	DF1BZ-12P-2.5DS	12	32.5	27.5	31.9
CL541-2045-6-00	DF1BZ-13P-2.5DS	13	35.0	30.0	34.4
CL541-2046-9-00	DF1BZ-14P-2.5DS	14	37.5	32.5	36.9
CL541-2047-1-00	DF1BZ-15P-2.5DS	15	40.0	35.0	39.4
CL541-2048-4-00	DF1BZ-16P-2.5DS	16	42.5	37.5	41.9
CL541-2049-7-00	DF1BZ-18P-2.5DS	18	47.5	42.5	46.9
CL541-2050-6-00	DF1BZ-20P-2.5DS	20	52.5	47.5	51.9

NOTES 1 : FOR 2 AND 3 CONTACTS, ONE MIS-INSERTION DEPRESSION SHALL BE MADE,
AND 4 TO 7 CONTACTS IS 2 MIS-INSERTION DEPRESSION TO BOTH ENDS,
FOR OTHER, 3 MIS-INSERTION DEPRESSION AS PER DRAWING.
2 : WHEN THE NUMBERS OF CONTACTS IS ODD.
THE STAND-OFF SHIFTS 1.25 RIGHTWARD.
(STAND-OFF AVAILABLE FROM 5 POSITIONS UP.)

NO.	MATERIAL	FINISH , REMARKS
1	POLYAMIDE	UL94V-0, NATURAL(WHITE)
2	BRASS	SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	1	1	DIS-H-002720	YK. NAKATSU	HK. UMEHARA	08.01.15

HIROSE ELECTRIC CO., LTD.

APPROVED	KJ. KATAYOSE	05.01.05
CHECED	TY. OMA	05.01.05
DESIGNED	TS. KUMAZAWA	05.01.05
DRAWN	TS. KUMAZAWA	05.01.05

DRAWING NO.	EDC3-305814-01
PART NO.	DF1BZ-*P-2.5DS
CODE NO.	CL541-

1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

FX18-60S-0.8SH RM15TRH-10PH(81) ZH05-20DP-HU(B) DF33C-4S-3.3C FH41-50S-0.5SH(28) FX18-80S-0.8SH RM15TP-2PA(81) ZE05-24DP-2H ZE064W-8DP-HU/R(A) DF17(3.0)-40DS-0.5V(57) DF40C-50DP-0.4V(51) DF62C-4S-2.2C RM12BRD-2PH(81) FH72-21S-0.3SHW HDE-CTH(10) DF22A-1416SCFA DF36A-25P-SHL DF52-4P-0.8C DF59M-2224PCF FH41-30S-0.5SH(05) BM29B0.6-4DS/2-0.35V(51) ZE05H-4P-2V(A) DF11-16DP-2DSA(24) DF57AH-5S-1.2C FH35C-19S-0.3SHW(50) FX8-120S-SV(22) GT8E-6S-HU DF19A-3032SCFA(41) DF65-4P-1.7V(21) ZE05H-12DP-2H