V-Series

Contura Switches

Product Highlights:

- Maximum sealing protection with dual seals around lamps and rocker stem, certified to IP66 & IP68. Optional panel seals for additional protection.
- Silver plated butt contact mechanism provides 50 to 100 thousand electrical cycles and a variety of different electrical ratings.
- Roller pin mechanism does not require lubricants and allows the switch to withstand extreme temperatures.
- The switch base accommodates up to 10 terminals and a large variety of switch and lighting circuits.
- The multi-step mounting wings provide a secure fit for panel thicknesses of 0.032" thru 0.250" in an industry standard 0.830" x 1.450" mounting hole.
- The switch connector allows the user to preload FQC terminals for easy assembly to switch base.
- Numerous choices of removable rockers allow for style change without having to retest or re-qualify the switch base.
- Illumination options are endless with bar, oval, and square lenses available with choices of incandescent, neon and a wide variety of LEDs including superbrite, megabrite, flashing and bicolor lighting.
- Available with a variety of complimentary mounting panels, hole plugs, illuminated indicators and boots to accommodate most any design need.



CONTURA III



CONTURA II



CONTURA V



CONTURA VII

Carling Technologies' sealed V-Series Contura switches are well known for their cutting edge design, high quality, maximum performance and unmatched reliability. These switches are a staple in the marine and transportation industries and have passed a range of environmental, corrosion, temperature, vibration, shock and sealing tests including MIL Std 202F, MIL Std 810C, UL 1500, ISO 8846, IEC 60529 and BS 5490 among others, making them one of the most rugged and reliable switches ever manufactured.

Carling Technologies™
Innovative Designs. Powerful Solutions.


Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: (860) 793-9281 • Fax: (860) 793-9231
www.carlingtech.com

V-Series Switch
DESIGN FEATURES

INTERCHANGEABLE ACTUATORS
Panel redesign is a snap with our wide range of rocker styles. Achieve maximum design variety with minimum inventory. Simply swap rockers to create an entirely new look for your panel.

DUAL SEAL PROTECTION
Seals out water, dust, debris, and enables switch certification to IP66/IP68 for front panel components.

CLEAN CONNECTIONS
Options for both eight and ten terminal base styles with AMP & Packard compatible connectors affords myriad circuit options while providing ease of assembly.

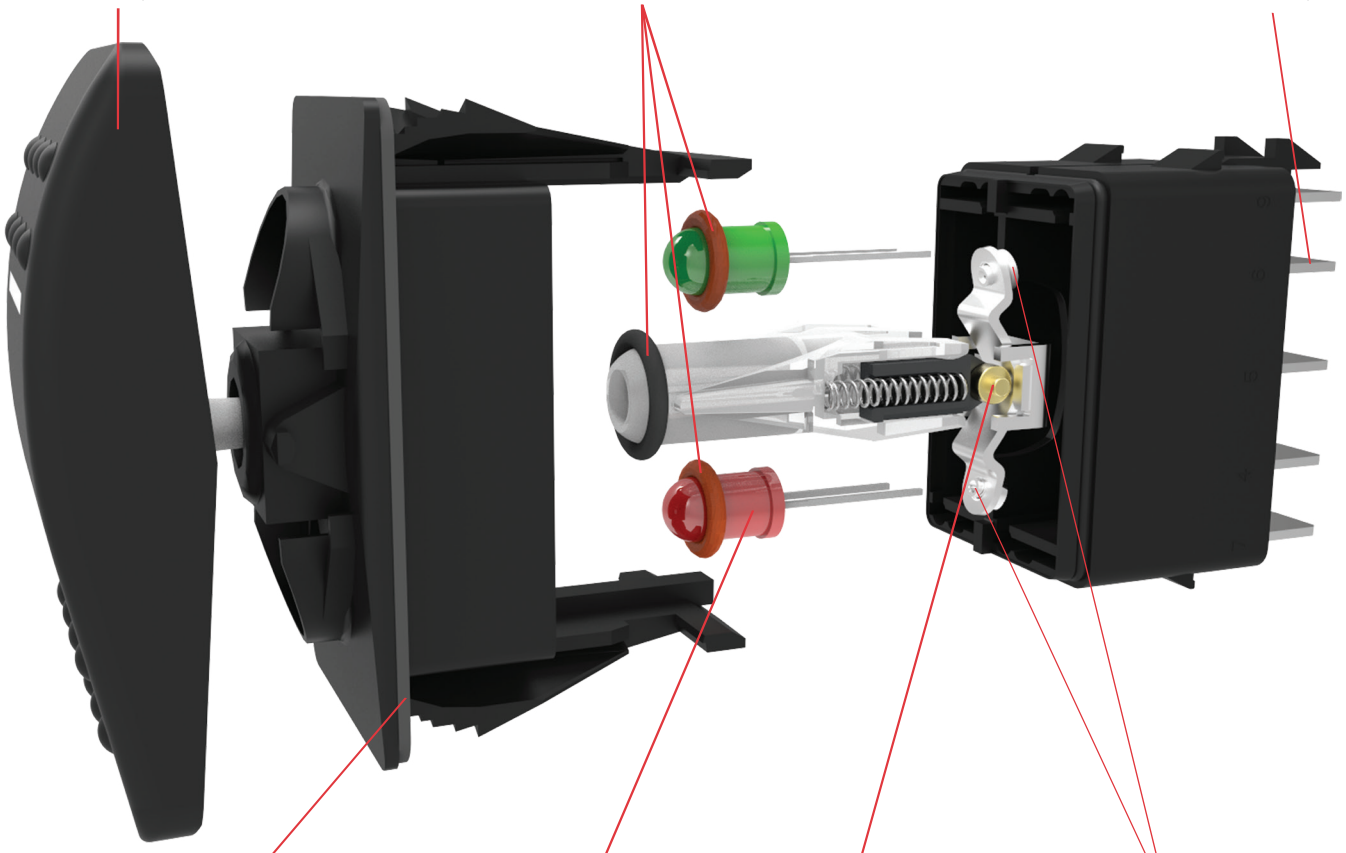

OPTIONAL PANEL SEAL
Prevents water/dust ingress behind panel.

MULTIPLE LIGHTING OPTIONS
In addition to incandescent lamps, our LED illumination is offered in a wide array of light intensities, colors, as well as dual level, tri-color, and flashing options.

BRASS ROLLER PIN
Robust mechanism eliminates the need for lubricants. Enables switch to withstand -40°C to +85°C temperatures.

SILVER PLATED BUTT CONTACT MECHANISM
Providing 50K to 100K electrical cycles and a variety of different electrical ratings.



Contura II & III

The Contura II & III actuators are constructed of thermoplastic polycarbonate and are offered with a hard nylon overlay or a "soft-touch" elastomer overlay. These models incorporate aesthetic designs on the top and bottom of the rocker featuring two rows of raised "bumps" on the Contura II and three "indented" lines on the Contura III.



Contura IV

The Contura IV's "Shape to create a Shape" actuator works with the curves, contours & advanced styling of the latest panel designs, flowing with these advanced curves & radii. This actuator style fits on the Contura flush bracket/ bezel.



Contura V

The symmetrically curved Contura V actuator provides the perfect complement to the Contura IV's "Shape to create a Shape" design concept. With its flush style mounting bracket, Contura V can be mounted in between two Contura IV's, by itself, or in groups.



Contura VI (WAVE)

The Contura VI WAVE sealed rocker switches, when used in a row, create an uniquely appealing "wave" design on your panel. A variety of colors and finishes are available for both rocker and wave insert. Contura VI features bar and oval lenses.



Contura VII

Contura VII featuring gently curved corners and edges assuring compatibility with most any panel design. Intuitive feel is maximized by the use of 2 embossed circular pads located at opposite ends of the rocker. Any combination of Bar or Oval style lenses can be located in the pads providing a truly unique look, exclusive to Contura VII.



Contura X

The raised bracket/bezel on the Contura X helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This curved rocker style is available with a variety of lenses and legends.



Contura XI

The raised bracket/bezel on the Contura XI helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This convex style rocker is available with a wide variety of lenses and legends.



Contura XII

The Contura XII version features a paddle style actuator with the raised bracket/bezel of Contura X and XI. The contoured handle design provides intuitive recognition and ease of operation and is available with all Contura X and XI lens and legend offerings.



Contura XIV

The Contura XIV represents a sleek new crossover rocker design which should appeal to Trucks, Buses and Heavy Vehicles as well as the Marine Industry. Intuitive feel is provided by recessed ridges along with a Center Groove which effectively defines the boundary between top and bottom switch functions.



V-Series Illuminated Indicators & Accessories

Alert operator of systems functions or malfunctions, are offered with removable/replaceable lamps in Contura II, II, V or X styles. Accessories include connectors, mounting panels, hole plugs, panel seals, and actuator removal tools. Refer to accessories page for full details

Electrical

Contact Rating	.4VA @ 24VDC (MAX) resistive 15 amps, 125VAC 10 amps, 250VAC 1/2 HP 125-250VAC 20 amps, 4-14VDC 15 amps, 15-28VDC 10A, 14VT 6A, 125VAC L
Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megohms
Initial Contact Resistance	10 milliohms max. @ 4VDC
Life	50,000- 100,000 cycles circuit dependent
Contacts	Silver alloy, silver tin-oxide, fine silver
Terminals	Brass or copper/silver plate 1/4" (6.3mm) Quick Connect terminations standard. Solder lug, Wire Lead

Mechanical

Endurance	150,000 cycles minimum circuit dependent

Physical

Lighted	Incandescent - rated 10,000 hours Neon - rated 25,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)
Seals	Internal Optional external gasket panel seal
Base	Polyester blend rated to 125°C with a UL flammability rating of 94V0.
Contura II,III,IV,V, VI, VII Actuator	**Hard Surface:** Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay. **Soft Surface:** Basic actuator structure molded of thermoplastic polycarbonate with an elastomer overlay.
Contura X,XI,XII Actuator,VP	Nylon 66 Reinforced rated to 105°C
Lens	Polycarbonate rated at 100°C
Contura XIV	Polycarbonate lens/subrocker with ABS shell

Actuator Travel (Angular Displacement)


2 position	18°
3 positions	9° from center

Mounting Specifications

Panel Thickness Range

Gaskets	Acceptable Panel Thickness
0	.030 to .250 (.76mm to 6.35mm)
1	.030 to .109 & .147 to .157 (.76 to 2.77mm & 3.73 to 3.98mm)

Recommended: No gasket with panel thickness of .032, .062, .093, .125,.187 or .250



Agency Certifications


Environmental

Sealing	Sealed version: IP68, in accordance with IEC 60529, BS 5490, DIN 40050 & NFC 20 010. This rating applies to front panel components of the actual switch only, and signifies protection against dust and the prolonged effects of immersion under pressure. The standard test for immersion under pressure requires submersion under one meter of water for 30 min. The V-Series switch has exceeded these parameters, having been actuated and illuminated during submersion.
Corrosion	Mixed Flowing Gas (MFG) Class III 3 year accelerated exposure per ASTM B-827, B-845 Silver and gold contacts
Operating Temp.	-40°C to +85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Vibration 2	Resonance search 24-50 Hz 0.40 DA 50-2000 Hz ±10 G's peak Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 No loss of circuit during test; <10µ seconds chatter.
Shock	Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 96 Hrs. Sealed version only.
Dust	Per Mil-Std 810C, Method 510.2 Air Velocity 300 ±200 Feet/Min, Test Duration 16 Hrs.
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Cond. A, -55°C to +85°C. Test criteria - pre and post test contact resistance
Moisture Resistance	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance
Ignition Protection	All Contura switches with sealed construction meet the requirements of UL1500/ISO8846 for ignition protection, in addition to conformance with EC directive 94/25/EC for marine products.

Dimensional Specifications: in. [mm]


CONTURA II

SHOWN WITH SQUARE LENS

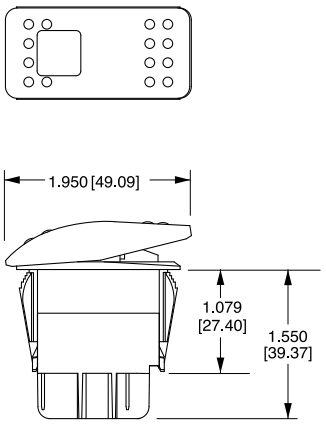

8 TERMINAL BASE W/BARRIERS


CONTURA III

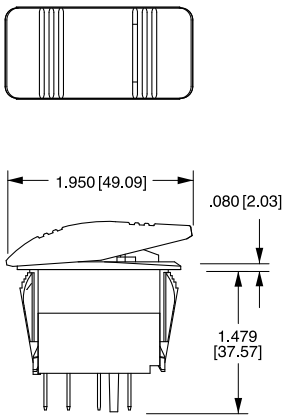


8 TERMINAL BASE W/O BARRIERS

CONTURA IV


SHOWN WITH BAR LENS

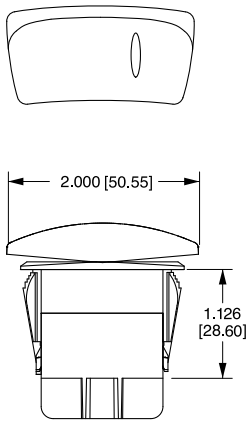


10 TERMINAL BASE W/BARRIERS




8 TERMINAL BASE W/BARRIERS




10 TERMINAL BASE W/BARRIERS




10 TERMINAL BASE W/O BARRIERS




SWITCH SHOWN WITH VCH CONNECTOR 8 TERMINAL



BOTTOM VIEW TERMINAL ARRANGEMENT 8 TERMINAL BASE



BOTTOM VIEW TERMINAL ARRANGEMENT 10 TERMINAL BASE





SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL

Dimensional Specifications: in. [mm]

CONTURA V

SHOWN WITH BAR LENS







8 TERMINAL BASE W/BARRIERS

CONTURA V

SHOWN WITH LOW PROFILE LOCK







8 TERMINAL BASE W/O BARRIERS

CONTURA VI

SHOWN WITH OVAL LENS







10 TERMINAL BASE W/BARRIER AND LAMP TERMINAL


CONTURA VII

SHOWN WITH LARGE LENS AND BAR LENS







10 TERMINAL BASE W/O BARRIERS

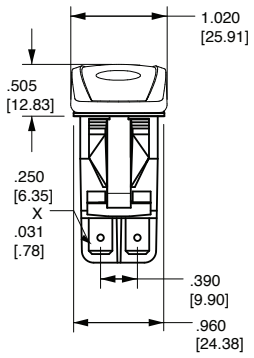


8 TERMINAL BASE W/BARRIERS

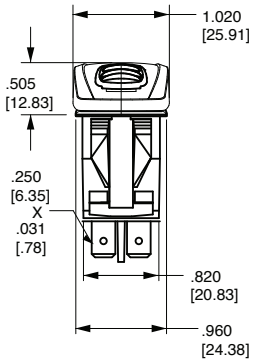


8 TERMINAL BASE W/O BARRIERS




10 TERMINAL BASE W/O BARRIERS




10 TERMINAL BASE W/O BARRIERS




SWITCH SHOWN WITH VCH CONNECTOR 8 TERMINAL




BOTTOM VIEW TERMINAL ARRANGEMENT 8 TERMINAL BASE



BOTTOM VIEW TERMINAL ARRANGEMENT 10 TERMINAL BASE




SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL




SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL


Dimensional Specifications: in. [mm]

CONTURA X
SHOWN WITH RAISED BRACKET






8 TERMINAL BASE
W/BARRIERS





8 TERMINAL BASE
W/BARRIERS




SWITCH SHOWN WITH
VCH CONNECTOR
8 TERMINAL

CONTURA XI
SHOWN WITH RAISED BRACKET AND TWO SQUARE LENSES






10 TERMINAL BASE
W/O BARRIERS




10 TERMINAL BASE
W/BARRIERS




BOTTOM VIEW
TERMINAL
ARRANGEMENT
8 TERMINAL BASE


BOTTOM VIEW
TERMINAL
ARRANGEMENT
10 TERMINAL BASE

CONTURA XII
SHOWN WITH PADDLE ACTUATOR






8 TERMINAL BASE
W/O BARRIERS





10 TERMINAL
BASE
W/O BARRIERS




SWITCHES SHOWN WITH
VC1 CONNECTOR
10 TERMINAL


CONTURA XIV
SHOWN WITH LARGE LENS



























10 TERMINAL BASE
W/O BARRIERS

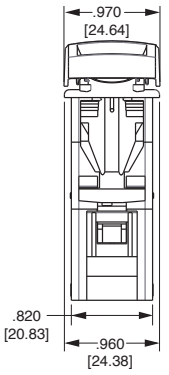













CIRCUIT	CIRCUIT DIAGRAM
1	
2	
3	
4	
5	
6	
7	
8	






CIRCUIT	CIRCUIT DIAGRAM
A	
B	
C	
D	
E	
F	
G	
H	




CIRCUIT	CIRCUIT DIAGRAM
J	
K	
L	
M	
R	
S	





SYMBOL LEGEND	
SYM.	DEFINITION
	DESIGNATES TERMINALS AND CONTACTS
	DESIGNATES LAMP LOCATION
	DESIGNATES MAINTAINED CIRCUITS
	DESIGNATES OTHER POSITION
	DESIGNATES MOMENTARY CIRCUITS
	DESIGNATES TWO POSITION CONNECTION
	DESIGNATES EXTERNAL JUMPER PROVIDED BY CUSTOMER


LAMP CIRCUIT	CIRCUIT DIAGRAM
A/1	
B/2	
C/3	
D/4	
E/5	




LAMP CIRCUIT	CIRCUIT DIAGRAM
F/6	
G/7	
H/Z	
J/8	
K/W	

LAMP CIRCUIT	CIRCUIT DIAGRAM
L/9	
M/R	
N/T	
P/V	
U/Y	

LAMP CIRCUIT	CIRCUIT DIAGRAM
SPECIAL #1	
SPECIAL #3	
SPECIAL #4	

CIRCUIT	CIRCUIT DIAGRAM
J1	
J2	
J3	
J4	

CIRCUIT	CIRCUIT DIAGRAM
J5	

CIRCUIT	CIRCUIT DIAGRAM
JA	
JJ	
JK	

NOTE:
J circuits are available for all non-locking V-Series styles. Consult factory for p/n details.

SYMBOL LEGEND	
SYM.	DEFINITION
○	DESIGNATES TERMINALS AND CONTACTS
◯	DESIGNATES LAMP LOCATION
⬭	DESIGNATES TWO POSITION CIRCUIT

CIRCUIT	CONNECTOR PART #
JA,JJ,JK	**JC1-01**
J1,J3,J4,J5	**JC2-01**
J2	**JC3-01**

V	1	D	A	B	T	0	B	–	A	R	B	00	–	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal
8 - - 7
1 - - 4
2 - - 5
3 - - 6

10 terminal
8 - - 7
1 - - 4
2 - - 5
3 - - 6
10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[3]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6


No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 ACTUATOR
0 No Actuator
A, B Contura II
C, D Contura III



Actuator orientation above terminals: 3,6 1,4

10 LENS
0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	
1	**6**	**8**	**G**	**M**	**T**	
2	**7**	**C**	**H**	**N**	**U**	
3	**8**	**D**	**J**	**P**	**V**	
4	**9**	**E**	**K**	**R**	**W**	
5	**A**	**F**	**L**	**S**	**Y**	


Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR[1] AND TEXTURE
0 - No Actuator

	Black	Gray	Red	White
Soft Surface	**B**	**G**	**R**	**W**
Hard Surface	**C**	**H**	**S**	**Y**


12 ACTUATOR LENS OR BODY LEGENDS[2]
11 ON / OFF **12** OFF / ON **13** I / O **14** O / I

15 O O / F N / F **16** O O / N F / F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4

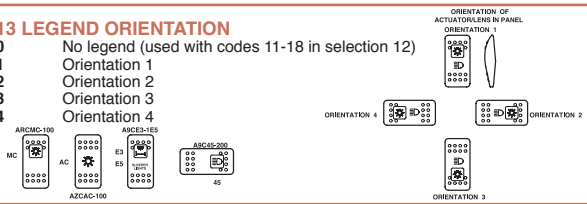

14 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 Body legends not available on Soft surface actuators; White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.
4 Contura II available with two square lenses. Consult factory for details.

V	1	D	A	S	W	0	B	–	A	Z	E	00	–	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Function	12 Legend		13 Legend Orientation

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
9	**N**	OFF	NONE	ON
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)

6 LOCK
Lock above terminals 1 & 4 end of switch.
W lock

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
4 Additional ratings available. See V-Series Switch Accessories page.

7 LAMP
Lamp above terminals 3 & 6 end of switch

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	


* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 HARD SURFACE ACTUATOR[1]

	Black	Gray	Red	White
Contura II	**A**	**B**	**G**	**H**
Contura III	**C**	**D**	**E**	**F**



Actuator orientation above terminals:

10 LENS
Z - No Lens

Clear	White	Amber	Green	Red	Blue
3	**8**	**D**	**J**	**P**	**V**



Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.


11 ACTUATOR LOCK FUNCTION AND COLOR[1]

Lock Color	Up	Down	Up & Down	Center[3]
Match Actuator	**A**	**H**	**R**	**1**
Black	**B**	**J**	**S**	**2**
White	**C**	**K**	**T**	**3**
Red	**D**	**L**	**V**	**4**
Safety Orange	**E**	**M**	**W**	**5**

12 ACTUATOR LENS OR BODY LEGEND[2]
00 - No Legend


21 OFF **22** ON **23** O **24** I


25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 21-28 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





V	1	D	A	B	T	0	B	–	E	P	C	00	–	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 ACTUATOR
0 No Actuator
E Contura IV, left orientation
T Contura IV, left orientation, laser etched
F Contura IV, right orientation
R Contura IV, right orientation, laser etched
Actuator orientation above terminals:



10 LENS
0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	
1	**6**	**8**	**G**	**M**	**T**	
2	**7**	**C**	**H**	**N**	**U**	
3	**8**	**D**	**J**	**P**	**V**	
4	**9**	**E**	**K**	**R**	**W**	
5	**A**	**F**	**L**	**S**	**Y**	

E F

Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.


11 ACTUATOR COLOR[1,5,6]
No Actuator **0** Black **C** Gray **H** Red **S** White **Y** Nickel **D** Pewter **E**


12 ACTUATOR LENS OR BODY LEGENDS[2]
11 ON / OFF **12** OFF / ON **13** I / O **14** O / I
15 O O / F N / F **16** O O / N F / F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





14 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Gloss brow is on left side of E actuator and right side of F actuator.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Laser etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
6 Pewter and nickel colors only available with laser etched actuator.

V	1	D	A	B	T	0	B	–	G	P	C	00	–	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 ACTUATOR
0 No Actuator
G Contura V
P Contura V, laser etched

10 Lens
0 - No Actuator **Z** - No Lens


Clear	White	Amber	Green	Red	Blue	
1	**6**	**8**	**G**	**M**	**T**	bar
2	**7**	**C**	**H**	**N**	**U**	bar/bar
3	**8**	**D**	**J**	**P**	**V**	oval
4	**9**	**E**	**K**	**R**	**W**	oval/bar
5	**A**	**F**	**L**	**S**	**Y**	oval/oval

Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR[1,3,3]
No Actuator **0** Black **C** Gray **H** Red **S** White **Y** Nickel **D** Pewter **E**


12 ACTUATOR LENS OR BODY LEGENDS[2,6]


11 ON / OFF	**12** OFF / ON	**13** I / O	**14** O / I	
15 O O / F N F	**16** O O / N F F	**17** O I	**18** I O	



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





14 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Laser Etched rocker only available with lens code Z & actuator colors black, nickel or pewter.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Nickel and Pewter colors only available with laser etched actuator.
6 Consult factory for laser etched lens callout.

V	1	D	A	S	W	0	B	–	J	Z	E	00	–	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Function	12 Legend		13 Legend Orientation

1 SERIES
V

2 CIRCUIT[3]
Terminal Connections as viewed from bottom of switch:

8 terminal: 8 - 7; 1 - 4; 2 - 5; 3 - 6

10 terminal: 8 - 7; 1 - 4; 2 - 5; 3 - 6; 10 - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
9	**N**	OFF	NONE	ON

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)

6 LOCK
Lock above terminals 1 & 4 end of switch.

W low profile lock
Y[6] high profile lock

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Located at T3-6 end of switch.
6 Contura V style only.

7 LAMP
Lamp above terminals 3 & 6 end of switch

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 HARD SURFACE ACTUATOR
CONTURA IV:

Orientation	Black	Gray	Red	White
Left	J	K	L	M
Right	N	P	R	S



Actuator orientation above terminals: 3,6 1,4

CONTURA V:

Orientation	Black	Gray	Red	White
	U	V	W	Y



Actuator orientation above terminals: 3,6 1,4

10 LENS[5]
Z - No Lens

Clear	White	Amber	Green	Red	Blue	
A	**B**	**C**	**D**	**E**	**F**	bar lens
G	**H**	**J**	**K**	**L**	**M**	oval lens

Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR LOCK FUNCTION AND COLOR[1]

Lock Color	Up	Down	Up & Down	Center[3]
Match Actuator	**A**	**H**	**R**	**1**
Black	**B**	**J**	**S**	**2**
White	**C**	**K**	**T**	**3**
Red	**D**	**L**	**V**	**4**
Safety Orange	**E**	**M**	**W**	**5**
Gray	**F**	**G**	**N**	**6**

12 ACTUATOR LENS OR BODY LEGEND[2]
00 - No Legend


21 OFF **22** ON **23** O **24** I


25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





V	1	D	B	G	N	T	B	-	H	A	7	C	B	AC	-	1	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Lens	12 Color	13 Insert Color	14 Actuator Lens		15 Legend Orientation	16 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[3]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

7 LAMP
Lamp above terminals 3 & 6 end of switch

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 ACTUATOR
0 No Actuator **H** High Insert  **L** Low Insert 

10,11 LENS[4]
0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	
–	**7**	**C**	**H**	**N**	**U**	Bar Lens Translucent
3	–	**D**	**J**	**P**	**V**	Bar Lens Transparent
4	–	**E**	**K**	**R**	**W**	Oval Lens Transparent
–	**A**	**F**	**L**	**S**	**Y**	Oval Lens Translucent


Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

12 ACTUATOR COLOR
C Black **H** Gray **S** Red **Y** White

13 INSERT COLOR
B Black
C Bright Chrome Plated
D Satin Chrome Painted
N Bright Nickel Plated
S Satin Chrome Plated
T Satin Nickel Plated
W White


14 ACTUATOR LENS OR BODY LEGENDS[2]
00 - No Legend this location/No actuator


11	ON OFF	**12**	OFF ON	**13**	I O	**14**	O I
15	O O F N F	**16**	O O N F F	**17**	O I	**18**	I O



For additional legend options & codes, visit us at www.carlingtech.com.

15 LEGEND ORIENTATION
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





16 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators. Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.

V	1	D	A	B	T	0	B	-	Z	R	C	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal
8 - - 7
1 - - 4
2 - - 5
3 - - 6

10 terminal
8 - - 7
1 - - 4
2 - - 5
3 - - 6
10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7 LAMP (same coding for both selections)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6


No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 ACTUATOR
0 No Actuator
Z Contura VII




10 LENS
Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.
0 - No Actuator **Z** - No Lens

White	Amber	Green	Red	Blue	Lens style & location
6	B	G	M	T	
7	C	H	N	U	
8	D	J	P	V	
9	E	K	R	W	
A	F	L	S	Y	
1	2	3	4	5	


11 ACTUATOR COLOR/THUMB PRINT COLOR[1]
O N/A - No Actuator
H Grey/Black
Y White/Black
C Black/Black
S Red/Black


14 ACTUATOR LENS OR BODY LEGENDS[2]
11 ON / OFF **12** OFF / ON **13** I / O **14** O / I
15 O O / F N / F **16** O O / N F / F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





14 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators. Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.
4 Legends available for lighted oval lens version only

V	1	D	A	B	6	0	1	–	6	P	Z	00	–	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Lens	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7 LAMP (same coding for both selections)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 BRACKET COLOR[1], PANEL SEAL (EXTERNAL FOAM GASKET)

	X & XI w/Flush Bracket			X, XI, XII w/Raised Bracket	
# of gaskets	**0**	**1**	**2**	**0**	**1**
Black	**B**	**C**	**D**	**1**	**4**
White	**W**	**Y**	**Z**	**2**	**5**
Gray	**G**	**H**	**J**	**3**	**6**

9 ACTUATOR

No Actuator	**0**				
	Black	Gray	White	Red	
Contura X	**1**	**2**	**3**	**4**	
Contura XI	**6**	**7**	**8**	**9**	
Contura XII	**J**	**K**	**N**	**M**	



Actuator orientation above terminals:

10 LENS - ABOVE LAMP #1 TERMINALS[1,4]
11 LENS - ABOVE LAMP #2 TERMINALS[3,6]
0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	Lens Style
3	**8**	**D**	**J**	**P**	**V**	**Bar**
4	**9**	**E**	**K**	**R**	**W**	**One piece Square**
5	**A**	**F**	**L**	**S**	**Y**	**Two piece Square*** **(w/ clear top protective lens)**
2	**7**	**C**	**H**	**N**	**U**	**Two piece Square*** **(w/ smoke top protective lens)**
1	**6**	**B**	**G**	**M**	**T**	**Two piece Square*** **(w/ white top protective lens)**

* All bottom lenses are molded of opaque material. Consult factory for other lens colors. Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.


12 ACTUATOR LENS OR BODY LEGEND[2]
00 - No Legend this location/No actuator

11 ON / OFF **12** OFF / ON **13** I / O **14** O / I


15 O O / F N / F **16** O O / N F / F **17** O I **18** I O


21 OFF / **22** ON / **23** O / **24** I

25 O / F / F **26** O / N **27** O **28** I


For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION[3]
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





14 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators. Custom colors are available, consult factory.
3 With 2 square lenses, use sel. 12 for lens above lamp 1, & selection 14 for lens above lamp 2.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Not available with Contura XI rockers.

V	1	D	A	S	W	0	1	-	1	P	B	00	-	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Function	12 Legend		13 Legend Orientation

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	10 terminal
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6. Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
6	**J**	ON	OFF	ON
9	**N**	OFF	NONE	ON
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION/BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)

6 LOCK
Lock above terminals 1 & 4 end of switch.
W lock

6,7 LAMP (same coding for both selections)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR[1], PANEL SEAL

	Black	White	Gray
No Gasket	**1**	**2**	**3**
One Gasket	**4**	**5**	**6**

9 HARD SURFACE ACTUATOR

Contura X	Black	Grey	Red	White
	1	**2**	**3**	**4**



Actuator orientation above terminals: 3,6 1,4

10 LENS - ABOVE LAMP #2 TERMINALS[5]
Z - No Lens

Clear	White	Amber	Green	Red	Blue	Lens Style
3	**8**	**D**	**J**	**P**	**V**	**Bar**
4	**9**	**E**	**K**	**R**	**W**	**One piece Square**
5	**A**	**F**	**L**	**S**	**Y**	**Two piece Square*** (w/ clear top protective lens)
2	**7**	**C**	**H**	**N**	**U**	**Two piece Square*** (w/ smoke top protective lens)
1	**6**	**B**	**G**	**M**	**T**	**Two piece Square*** (w/ white top protective lens)

* All bottom lenses are molded of opaque material. Consult factory for other lens colors. Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR LOCK FUNCTION AND COLOR[3]

Lock Color	Up	Down	Up & Down
Match Actuator	**A**	**H**	**R**
Black	**B**	**J**	**S**
White	**C**	**K**	**T**
Red	**D**	**L**	**V**
Gray	**E**	**M**	**W**
Safety Orange	**F**	**N**	**Y**

12 ACTUATOR LENS OR BODY LEGEND[2]
00 - No Legend


21 OFF **22** ON **23** O **24** I


25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION[3]
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators; Custom colors are available, consult factory.
3 Located over T1-4 end of switch.
4 Additional ratings available. See V-Series Switch Accessories page.
5 Located over T3-6 end of switch.

V	1	D	B	B	C	0	B	-	FA	P	C	AB	-	1	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Actuator Color	12 Legend		13 Legend Orientation	14 Actuator, Lens Legends

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal: 8 - - 7, 1 - - 4, 2 - - 5, 3 - - 6

10 terminal: 8 - - 7, 1 - - 4, 2 - - 5, 3 - - 6, 10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1
S*		2 & 3, 5 & 6	2 & 3	1 & 2

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING[3]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**4**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M.

5 ILLUMINATION
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

	Lamps	Illumination Type	Lamp wired to Terminals
S	NONE	–	–
A	1	INDEPENDENT	8 (+) 7 (–)
B	1	DOWN	3 (+) 7 (–)
C	2	UP	3 (+) 7 (–)
D	1	DOWN	3 (+) 7 (–)
	2	DOWN	1 (+) 7 (–)
E	1	UP	1 (+) 7 (–)
	2	UP	3 (+) 7 (–)
F	1	INDEPENDENT	8 (+) 7 (–)
	2	UP	3 (+) 6 (–)
G	1	INDEPENDENT	8 (+) 7 (–)
	2	UP	3 (+) 7 (–)
H	2	INDEPENDENT	8 (+) 7 (–)
SINGLE POLE SWITCHES ONLY			
J	1	DOWN	3 (+) 8 (–)
	2	INDEPENDENT	6 (+) 7 (–)
K	1	INDEPENDENT	8 (+) 7 (–)
	2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY			
L	1	DOWN	3 (+) 6 (–)
M	1	UP	3 (+) 6 (–)
N	1	DOWN	3 (+) 6 (–)
	2	DOWN	1 (+) 4 (–)
P	1	UP	1 (+) 4 (–)
	2	UP	3 (+) 6 (–)
U	1	INDEPENDENT	8 (+) 7 (–)
	2	INDEPENDENT	10 (+) 9 (–)

6 & 7 LAMP

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V superbright	**7** 18V superbright	**8** 24V
LED*	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 BRACKET COLOR & PANEL SEAL

Color	No Gasket	1 Gasket	2 Gasket
Black	**B**	**C**	**D**
Gray	**G**	**H**	**J**
White	**W**	**Y**	**Z**

9 ACTUATOR STYLE
0 No Actuator - Furnished separately
FA Contura XIV
FB Contura XIV - Laser Etched



10 LENS COLOR / STYLE
0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue	
1	**6**	**B**	**G**	**M**	**T**	
2	**7**	**C**	**H**	**N**	**U**	
3	**8**	**D**	**J**	**P**	**V**	
4	**9**	**E**	**K**	**R**	**W**	
5	**A**	**F**	**L**	**S**	**Y**	PAD Printed
5	**A**	**N/A**	**N/A**	**N/A**	**N/A**	Laser-Etched

Lens color for LEDs must be clear, white, or match color of LED.
Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR[1]
O N/A - No Actuator
C Black
S Red
Y White


12 ACTUATOR LENS or BODY LEGEND[2]
00 - No Legend this location/No actuator

11 ON / OFF **12** OFF / ON **13** I / O **14** O / I

15 O O / F N F **16** O O / N F F **17** O I **18** I O



13 LEGEND ORIENTATION
0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



14 ACTUATOR / LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators.
3 Additional ratings available. See V-Series Switch Accessories page.

Reduce inventory levels and cost by stocking actuators and base switches separately.

Contura II, III, IV, V, VI, VII, X, XI, XII, XIV Base switches separately: specify **V** with code selections 2-8 in the ordering schemes.
Contura II, III, IV, V Actuator only: **VV** with code **A** or **C** for selection 9, & with selections 10-14 in the ordering schemes.
Contura VI Actuator with lenses and inserts only: **VV** with code selections 9-16
Contura II, III, IV, V, VII Actuator only: **VV** with code **A**, **C**, **E**, **G, P** or **Z** for selection 9 & with selections 10-14 in the ordering schemes.
Contura X, XI, XII, XIV actuators with lenses separately: **VV** with code selections 9-14 in the ordering schemes.
Panel Seal: VPS

Contura X & XI actuators without lenses separately:

VVR	6	1	00	1
1 Actuator Separately	*2 Actuator Style/Color*	*3 Lens Opening*	*4 Actuator Legend*	*5 Legend Orientation*

1 CONTURA X & XI ACTUATOR SEPARATELY
VVR

2 ACTUATOR STYLE & COLOR


	Black	Gray	White	Red
Contura X	**1**	**2**	**3**	**4**
Contura XI	**6**	**7**	**8**	**9**

3 LENS OPENING FOR[1]

1 One bar lens
2 One bar lenses
3 One square lens
4 two square lens
5 square lens on top/ bar lens on bottom (Contura X only)

4 ACTUATOR LENS OR BODY LEGEND


00 - No Legend this location
11 ON OFF **12** OFF ON **13** I O **14** O I
15 O O F N F **16** O O N F F **17** O I **18** I O



For additional legend options & codes, visit us at www.carlingtech.com.

5 LEGEND ORIENTATION[1]

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



Contura X, XI & XII top piece of 2-piece lens separately:

VVT	1
1 Lens Separately	*2 Color*

1 TOP OF LENS SEPARATELY
VVT

2 COLOR
1 Clear **2** Smoke **3** White

Contura X, XI & XII actuator lens assembly:



1 piece lens/bar lens are positioned the same as bottom lens for assembly, minus the top lens. Lenses snap in from bottom.

Notes:
1 If actuator lens opening for 2 bar or 2 square lenses, legend orientation 0,1, or 2 must be chosen.
2 Center of actuator marking not available for Contura XII.
3 Legend is not available for bar style lens.
4 Not recommended with neon lamps.
5 Must also order top piece of 2 piece square lens separately.

Contura XII actuators without lenses separately:

VVP	J	1	Z	21	1	00
1 Actuator	*2 Style & Color*	*3 Lens Opening*	*4 Lens Opening*	*5 Legend*	*6 Legend Orientation*	*7 Legend*


1 CONTURA XII ACTUATOR SEPARATELY
VVP

2 ACTUATOR STYLE & COLOR
J Black **K** Gray **N** White **M** Red

3,4 LENS OPENING FOR
Z No lens **1** Bar lens **2** Square lens

5, 7 LENS OR BODY LEGEND[2]


00 - No Legend **21** OFF **22** ON **23** O **24** I
25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com.

6 LEGEND ORIENTATION[3]

0 No legend
1 Orientation 1
2 Orientation 2



Contura X, XI & XII actuator lens assembly separately:

VVL	2	1	00	0
1 Lens Separately	*2 Lens Style*	*3 Lens Color*	*4 Legend*	*5 Legend Orientation*


1 CONTURA X, XI & XII LENS SEPARATELY
VVL

2 LENS STYLE[3]
1 Bar lens 2 One Piece Square lens 3 Bottom of Two-Piece Square lens[5]

3 TRANSLUCENT LENS COLOR
1 Clear **2** White **3** Amber **4** Green[4] **5** Red **6** Blue[4]

4 LENS OR BODY LEGEND[2]


00 - No Legend **21** OFF **22** ON **23** O **24** I
25 O F F **26** O N **27** O **28** I



For additional legend options & codes, visit us at www.carlingtech.com.

5 LEGEND ORIENTATION[3]

0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4





Easily integrate Contura products into your system, with Contura Accessories


Contura Connectors

Q.C. SELECTION GUIDE					
COMPANY SERIES	PART NO		WIRE RANGE		ORIEN-TATION
	PLAIN BRASS	TIN PLATED BRASS	AWG	MM 2 (REF)	
PACKARD 58 SERIES	02965580		12	3.0	B
	02965471	12010601	(2)16-14	(2)1.0-2.0	
	02965470		16-14	1.0-2.0	
	02965469	06288318	20-18	.5-.8	
PACKARD METRI-PACK 630 SERIES		12084590	10	5.0	A
		12052224	12	3.0	
		12015870	16-14	1.0-2.0	
		12020035	(2)22-18	(2).5-.8	
	12015832	12015869	20-18	.5-.8	
		12052222	20-22	.35-.5	
AMP 250 SERIES FASTIN-FASTON	60253-1	60253-2	16-12	1.3-3	B
			(2) 16	(2) 1.3	
	42100-1	42100-2	18-14	.8-2	
	60295-1	60295-2	22-18	.3-.9	

NOTE: Consult Delphi Packard and/or Amp on actual part numbers and availability.
AMP is a registered trademark of AMP Inc. Harrisburg, PA
Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warren, Ohio




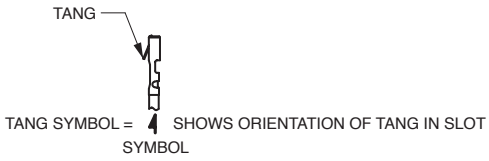

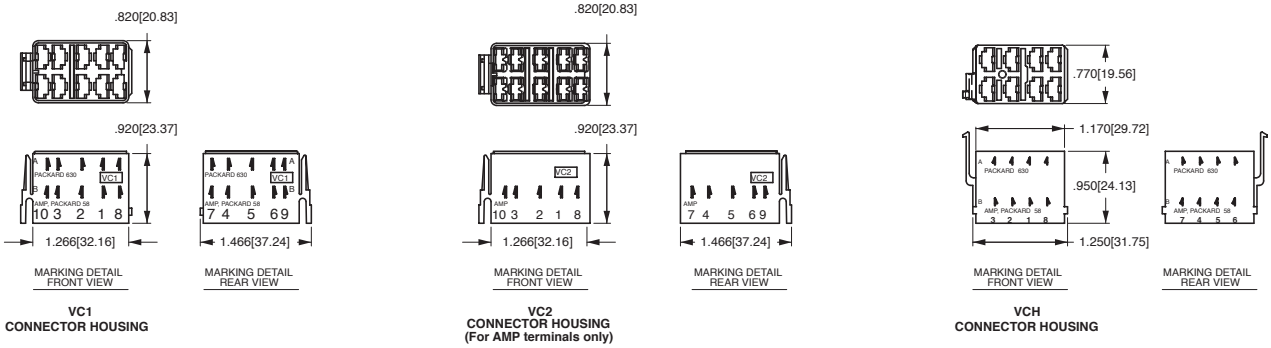


Contura X Boot (P/N VB1-01)





Contura II, III, IV & V Actuator Removal Tool (P/N VRT)



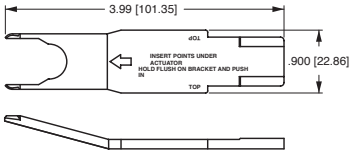


Additional V-Series Ratings

1	.4VA @ 28VDC Resistive
4	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings
5[1]	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified
6[2]	15A 125VAC 1/2 HP, 12(2)A 125 VAC µ T85
7[2]	15A 125VAC 1/2 HP, 12(6)A 125 VAC T85
8[2]	10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(2)A 250 VAC µ T85
9[2]	10A 250VAC, 15A 125VAC, 1/2 HP 125-250VAC, 12(6)A 250 VAC T85
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuits 1, 4, A, & D only)
F	10A 14V, 6A, 14VT (circuit G only)
G	20A 6V
H	20A 3V
L	15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L
M	.4VA/20A 12V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)
N	.4VA/15A 24V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)

NOTES
Consult factory to determine availability for individual circuits and their HP rating.
1. Not avaiable with Contura 7 or 14 rocker styles.
2. Ratings 6 - 9 are UL, CSA & VDE certified, require terminations A or B for double pole circuits, & are not available with illumination circuits 4, 8, D, J, N, & T or with wire lead or solder lug terminations.

Circuits 1, 4, A, D, H, M & E are not available with rating 6 & 8. Rating 7 & 9 only available with circuits 1, 4, A & D. Circuits 2, 3, 5, 7, 8, K, L are 1/2 HP 250VAC only with rating 8. Ratings 6 & 7 must specify lamp code 1 (125VAC neon). Ratings 8 & 9 must specify lamp code 2 (250VAC neon). Rating L available with circuits 1, 4, A & D only.


Contura Mounting Panels
Dimensional Specifications: in. [mm]




MOUNTING PANEL
For additional units, add 1.03[26.2] per unit.
For more than 2 V-Series Switches, add middle section. Available in Panel Thicknesses listed below. Consult factory.

MOUNTING PANEL THICKNESS


.062[1.57]	.187[4.75]
.093[2.36]	.250[6.35]
.125[3.17]	.375[9.52]




VMS MOUNTING PANEL HOLE




MOUNTING PANEL OPENING (2) UNITS




VME MOUNTING PANEL END




VMM MOUNTING PANEL MIDDLE



VMS MOUNTING PANEL




VM3 MOUNTING PANEL

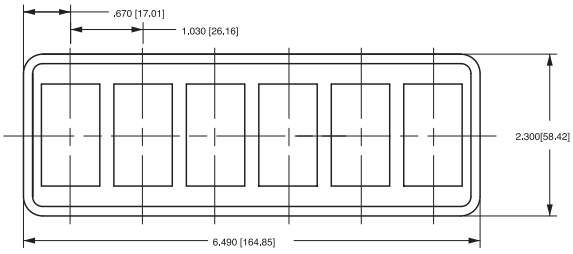


VM6 MOUNTING PANEL

Contura Hole Plug
Dimensional Specifications: in. [mm]







VHP CONTURA II,III HOLE PLUG




VHP CONTURA II,III HOLE PLUG




VH1 STANDARD HOLE PLUG (No wing serrations) (With VC1 connector attached)




VH2 STANDARD HOLE PLUG (With wing serrations)






VH3 CONTURA IV HOLE PLUG (No wing serrations)




VH4 CONTURA IV HOLE PLUG (With wing serrations)



DETAIL VIEW VH1,VH3 & VH5 HOLE PLUGS (No wing serrations for ease of removal)





VH5 CONTURA V HOLE PLUG (No wing serrations)



VH6 CONTURA V HOLE PLUG (With wing serrations)



DETAIL VIEW VH2,VH4 & VH6 HOLE PLUGS (With wing serrations)

* Intentionally left blank

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue • Plainville, CT 06062
Phone: (860) 793-9281 • Fax: (860) 793-9231
Email: sales@carlingtech.com • www.carlingtech.com

East Region Sales Office, CT • ersm@carlingtech.com
Midwest Region Sales Office, IL • mrsm@carlingtech.com
West Region Sales Office, CA • wrsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Kowloon, Hong Kong
Int + 852-2737-2277 • Fax: Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China • shenzhen@carlingtech.com
Shanghai, China • shanghai@carlingtech.com
Pune, India • india@carlingtech.com
Kaohsiung, Taiwan • taiwan@carlingtech.com
Yokohama, Japan • japan@carlingtech.com

Europe / Middle East / Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Int + 44 1392-364422 • Fax: Int + 44 1392-364477
Email: ltd.sales@carlingtech.com

GmbH, Germany • gmbh@carlingtech.com
SAS, France • sas@carlingtech.com

REV_SW_V_06_2014

Carling Technologies™
Innovative Designs. Powerful Solutions.