

MALE-FEMALE RIGHT ANGLE ADAPTER


-

R142.770.000

Series : **BNC 75**

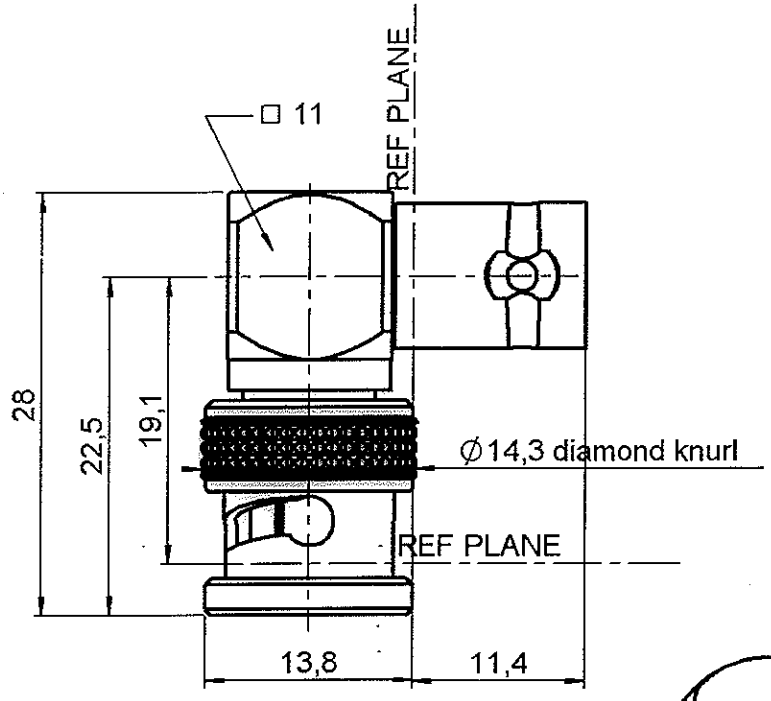

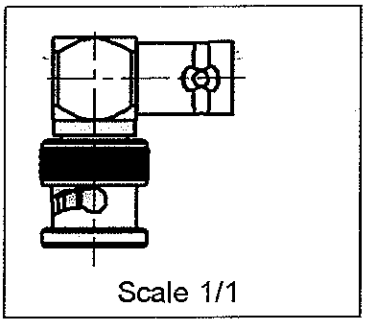

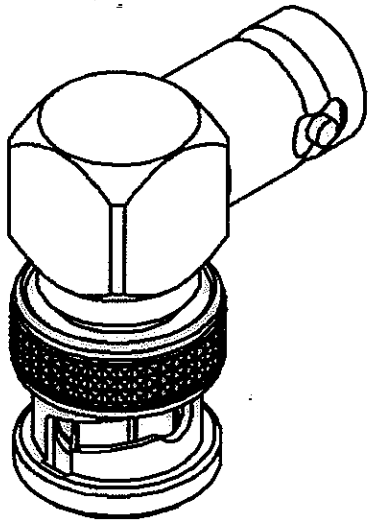

: All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING
BODY	**BRASS**	**NICKEL 2 µm**
CENTRE CONTACT	**BERYLLIUM COPPER,BRASS**	**GOLD 0.5 OVER NICKEL 2 µm**
OUTER CONTACT	-	**- µm**
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	**BRASS**	**NICKEL 2 µm**
-	-	-
-	-	-

RADIALL®

MALE-FEMALE RIGHT ANGLE ADAPTER

-

R142.770.000

Series : **BNC 75**

ELECTRICAL CHARACTERISTICS

Impedance		**75**	Ω
Frequency		**0-1.5**	GHz
VSWR	**1.35** +	**0.000**	x F(GHz) Maxi
Insertion loss		**0.175**	√F(GHz) dB Maxi
RF leakage	- (	**57**	- F(GHz)) dB mini
Voltage rating		**500**	Veff Maxi
Dielectric withstanding voltage		**1500**	Veff mini
Insulation resistance		**5000**	MΩ mini

MECHANICAL CHARACTERISTICS

Centre contact retention		
Axial force – Mating end	**18**	N mini
Axial force – Opposite end	**18**	N mini
Torque	**2.8**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**500**	Cycles mini
Weight	**0.000**	g

SPECIFICATION

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Leakage – pressurised only	**NA**	Mpa

OTHERS CHARACTERISTICS

Assembly instruction **NA**

Others :
-

RADIALL®

Edition : 9905 C

Design changes may be in order to improve the product.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

R142770000 R142770000W