
Rocker Switch | **RB1-1D-DC-2-B**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

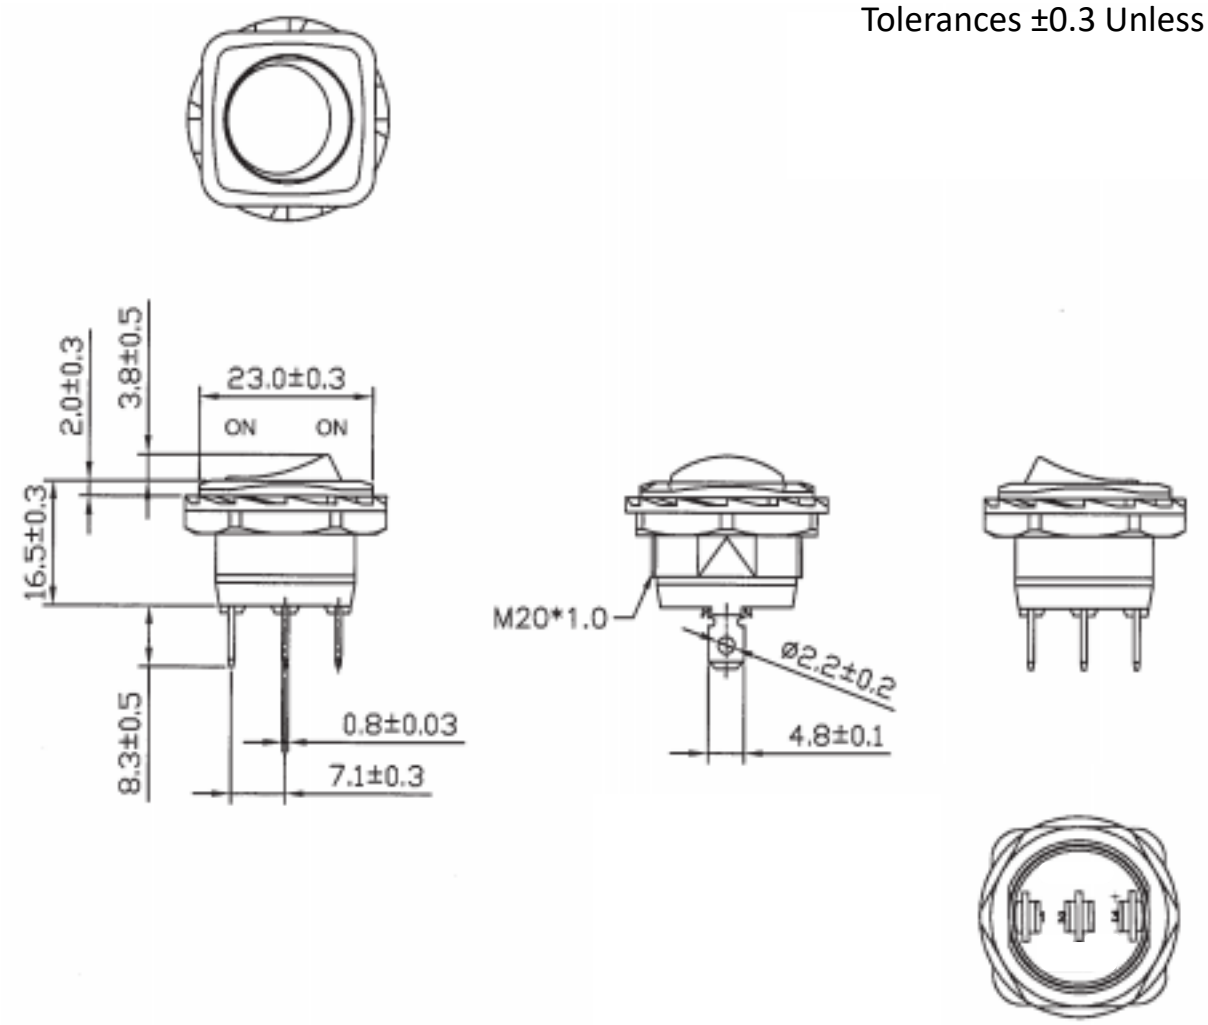


Mounting Hole

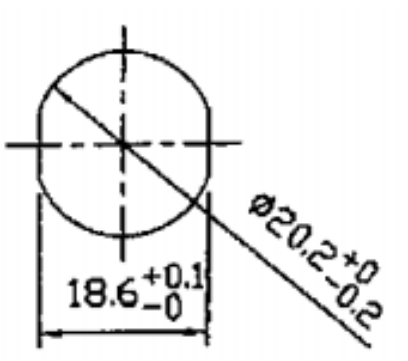

Thickness: 6mm max

Circuit Diagram

3P SPDT ON-ON

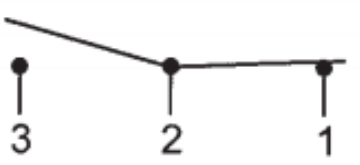

Electrical Specifications

Rating	20A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66+33%GF
Actuator	Black, Nylon 66

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

TE3-1A-DC-1-AL RD2-1A-DC-1-AL SB-1B-DC-3-R SC-B SRA1-2F-DC-1-NN SRD2-1G-DC-1-BNN TA2-1A-DC-5 TE1-1F-DC-1-PB PB-1A-DC-2-RDL TC6-P1-Z RF3-1A-DC-2-GL SRD2-2F-DC-1-BNN PD-1E-DC-9-UL SB-1B-DC-3-B SRA1-1A-DC-1-NN-2 SRD2-2F-DC-1-RNN TA1-1A-DC-4 SRB1-1G-DC-1-NN SRC1-1B-DC-1-B SRD1-2A-DC-1-BGN TA2-1G-DC-6-O TB1-2H-DC-6 WR1 RA4-2A-DC-2-AL RF1-1A-DC-2-B-3 RG3-1A-DC-1-B PB-1A-DC-2-B PB-1B-DC-2-RIL RC-1A-DC-1-AL TE6-1A-DC-1-UL