


RoHS


REVISIONS				
SYM	ECN No.	MODIRICATION	DATE	ISSUED

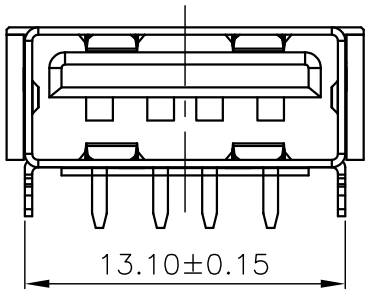


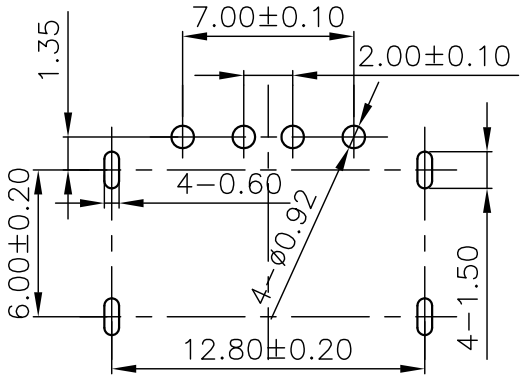

PCB LAYOUT

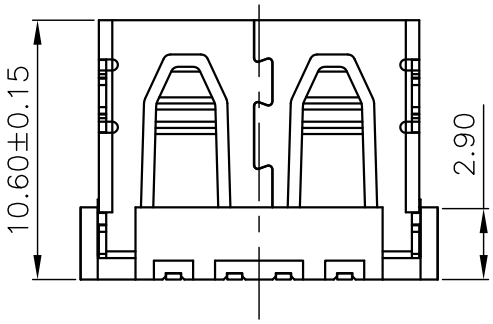

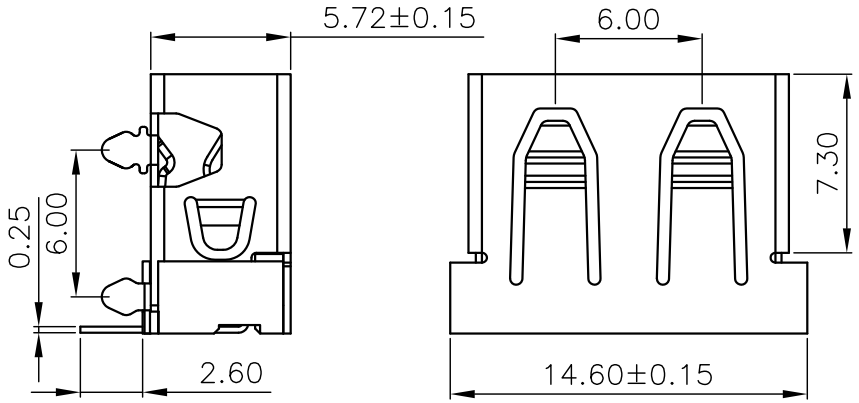

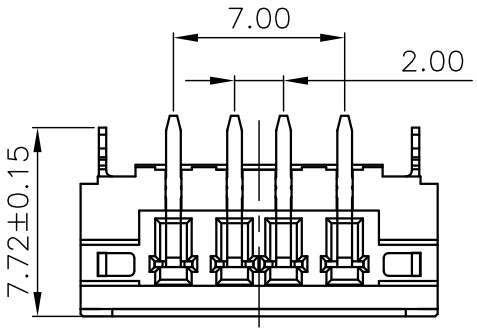

Note:
1.Material:
- 1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
- 1.2,Contact: copper alloy,t=0.25mm
- 1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:
- 2.1,Current rating:1.5A Max.
- 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3,Contact resistance: 30 mΩ Max.
- 2.4,Insulation resistance: 100 MΩ Min.
- 2.5,Total mating force: 3.57 Kgf Max.
- 2.6,Total unmating force: 1.0 Kgf Min.

3.Finish:
- 3.1,Contact: Piated Golg in Mating Area: Tin On Solder Talls
  Shell: Nickel Plating

4.Environmental:
- 4.1,Temperature range: -55°C~85°C

PART ON:
914-34XAXXX1D1XX

- 电镀规格；02,镀金1u″ 04,镀金3u″ 07,镀金15u″ 08,镀金30u″
- 端子材质；1,青铜 2,磷铜
- 端子规格；D,90度 Y,180度 S,SMT贴板
- 塑胶型态；1,苹果款 2,苹果款打码
- 塑胶颜色；01,白色 02,黑色 03,本色
- 塑胶材质；1,PBT 2,LCP 3,PA9T 4,PPA 5,PA6T
- 对插方向；A,正向
- 外壳材质；1,铁壳 2,铜壳
- 插口类型；2,无边方弹 4,无边尖弹 8,无边底无弹 9,无边大小弹
- 外壳脚型；1,10.0两脚鱼叉 2,10.6两脚鱼叉 3,前两脚锥形 4,四脚锥形 5,前两脚贴板
- 类别：苹果款

1	914-441A3061D10201
2	
3	
4	

DRAWN	JTJ 深圳市精拓金电子有限公司					
CHECKED	TITLE AF10.6苹果款四脚尖弹铁壳 PA9T白胶偏蓝DIP插拔力小	PART NO. 914-441A3061D10201				
APPROVED		DRAWING NO. R914341A1011D102				
3rd ANGLE PROJECTION	UNIT mm	TOLERANCE .XXX±.10, .XX±.20, .X±.25, ANG±5°	SCALE 1:1	SHEET 1 OF 1	SIZE A4	REV. X1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-A64A2091S101A3 905-761A2032S10200 906-262A1021D10200 918-415K3028S40000
919-162A1012D10400 920-154A2021Y10110 920-C62A2021S10103 910-151A2021D10100
912-112A1011D10100 906-752B1114D10200 917-B88C201AH70201 918-468K2029Y50000
920-A62A2021S10104 904-232A2031S10100 904-331B2032S10200 908-351A1011D10100
912-312A1012D10100 916-151A1022Y10200 918-318K2023C40005 918-418K2022Y40011
920-A62A2021S10108 904-232B2032S10100 907-111A1022D10200 911-221A2021S10100
920-C52A2021S10105 920-F52A2021S10105 912-112A2021S10100 906-552A1012D10200
907-312A1101Y10210 917-P81A202ES60201