Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

46-
2231.11N0.000



https://digikey.eao.com/p/46-2231.11N0.000

Your product:



46-2231.11N0.000
Actuator

FRONT

Front bezel colour:	Black
Front dimension:	Ø 29 mm
Front form:	round
Front bezel material:	Plastic

MOUNTING

Mounting cut-out:	Ø 22.3 mm
Design:	raised

OPERATING-/INDICATION PART

Lens illumination:	illuminative
Lens shape:	flush
Lens colour:	White
Lens material:	Plastic
Lens optics:	transparent

ELECTRICAL CHARACTERISTICS

Protection class:	II

MECHANICAL CHARATERISTIC

Weight:	0.019 kg
Tightening torque:	2 … 3 Nm (17.7 … 26.6 Lb-in)

Mechanical lifetime:	1 Mio. cycles of operation
Switching action:	Momentary

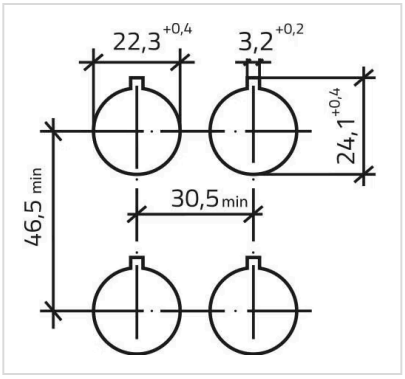
AMBIENT CONDITION

Shock resistance:	30g, 18ms (EN-IEC 60068-2-27) 50g, 11ms (EN-IEC 60068-2-27)
Operating temperature:	– 25 °C ... + 55 °C
Vibration resistance:	5g f= 2...500Hz (EN-IEC 60068-2-6)
IP front protection:	IP65
Climate resistance:	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
IK front protection:	IK03

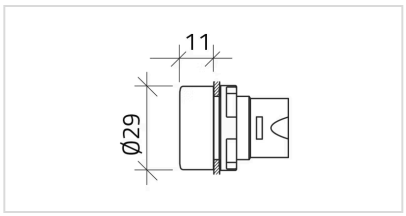
CERTIFICATE

Approbations:	CSA, EAC, UL
Conformities:	CE
Standards:	CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

max. number of switching elements:	8
Short Description:	Actuator, Ø 22.3 mm, Ø 29 mm, flush, illuminative, White, Plastic, transparent, round, Black, Plastic, Momentary, IP65, IK03
Housing material:	Plastic
Housing colour:	Black
Mounting cut-outs:	

Dimension drawings:


11
Ø29

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

eao:

704.403.018 31-282.0252 45-2134.1120.000 51-423.036 704.411.110KN 82-5151.1134 82-6551.1134 02-810.001 10-1112.1279 17-030352 45-1131.2190.000.101 45-320.1E16 45-320.1E46 82-4151.1154 45-2530.1920.000 61-1130.0 704.011.018 10-2K12.1072 K14-131.221071 704.403.0 704.602.0 84-8511.5620 82-6851.2000 01-132.0252 44-966.5 704.042.418 82-4151.2133 82-6561.1000 31-940 45-290J.1000.111