DTA143Zxx Series

Digital Transistors (PNP) (Built-in Resistors)

1. Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost complete -ly eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy






2.MAXIMUM RATINGS (Ta=25℃ unless otherwise noted)

Parameter	Symbol	Limits(DTA143Z xx)						Unit
		M	E	UA	CA	KA	SA	
Supply Voltage	V_{CC}	-50						V
Input Voltage	V_{IN}	-30~+5						V
Output Current	I_O	-100						mA
Power Dissipation	P_D	100	150	200	200	200	300	mW
Operation Junction and Storage Temperature Range	T_j , T_{stg}	-55~+150						℃

3. Electrical Characteristics (Ta=25℃unless otherwise specified)


Symbol	Parameter	Condition	Min	Typ	Max	Unit
R_1	Input resistance		3.29	4.7	6.11	kΩ
R_2/R_1	Resistance ratio		8	10	12	
$V_{O(on)}$	Output voltage	I_O/I_I=-5mA/-0.25mA	—	—	-0.3	V
I_I	Input current	V_I=-5V	—	—	-1.8	mA
$I_{O(off)}$	Output current	V_{CC}=-50V, V_I =0	—	—	-0.5	μA
G_1	DC current gain	V_O=-5V, I_O=-10mA	80	—	—	
$V_{I(off)}$	Input voltage	V_{CC}=-5V, I_O=-100μA	-0.5	—	—	V
$V_{I(on)}$		V_O =-0.3V, I_O=-5mA	—	—	-1.3	V
f_T	Transition frequency	V_O=-10V, I_O=-5mA , f=100MHz	—	250	—	MHz

4. Pinning information


Pin	symbol	Part Number	Simplified outline	Equivalent Circuit	Marking	Package
1	IN	DTA143ZCA			E13	SOT-23
2	GND					
3	OUT					
1	IN	DTA143ZKA			E13	SOT-23-3
2	GND					
3	OUT					
1	IN	DTA143ZE			E13	SOT-523
2	GND					
3	OUT					
1	IN	DTA143ZUA			E13	SOT-323
2	GND					
3	OUT					

5.Electrical Characteristics Diagrams


ON Characteristics

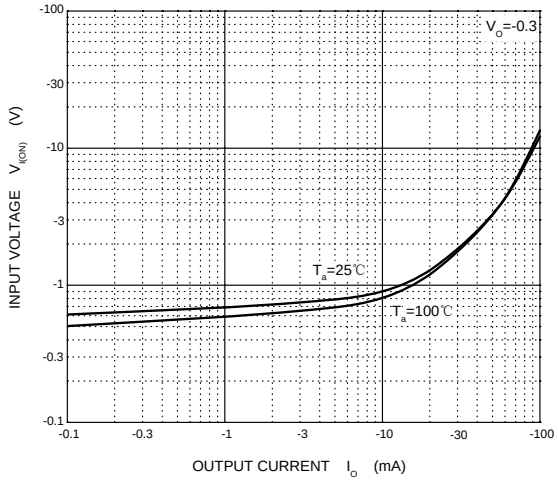


OFF Characteristics

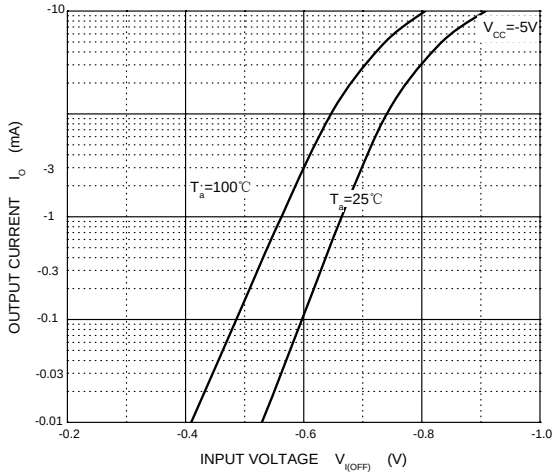


G_I —— I_O

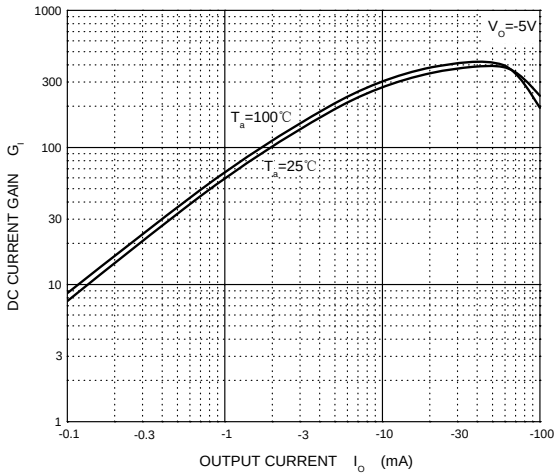


$V_{O(ON)}$ —— I_O

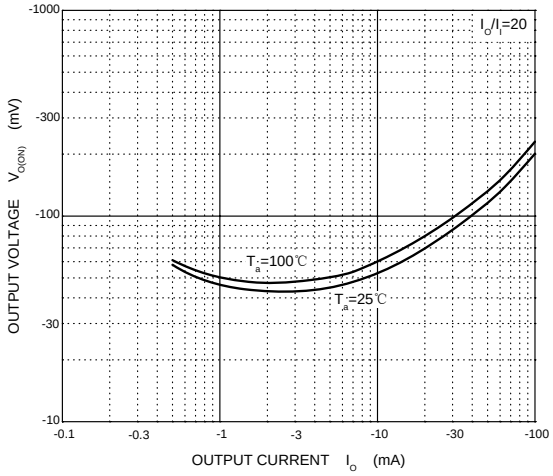

C_O —— V_R

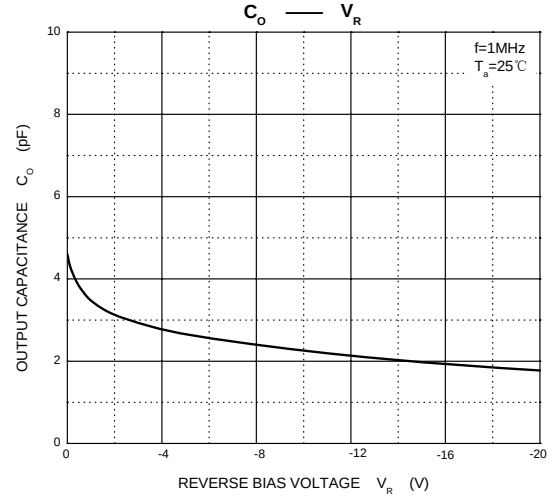


P_D —— T_a

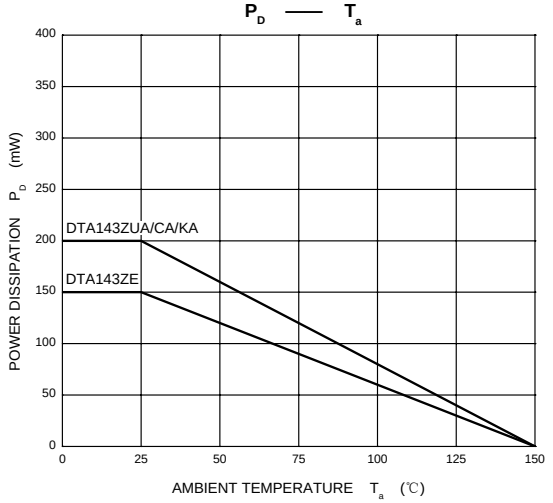

The curves above is for reference only.


6 . Outline Drawing

SOT-23 Package Outline Dimensions

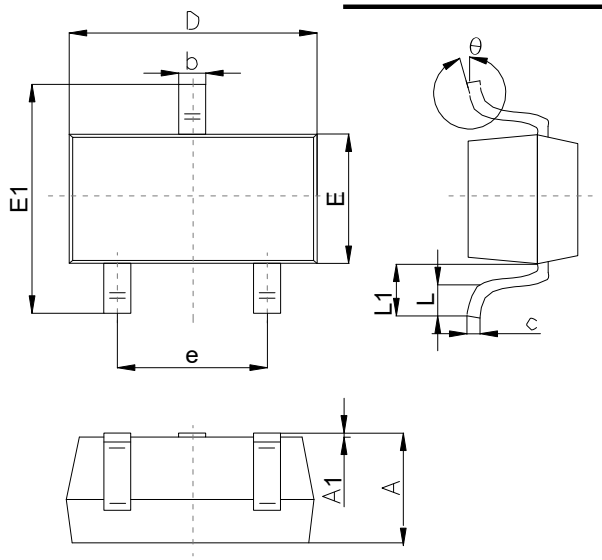


Symbol	Dimensions In Millimeters		
	Min	Typ	Max
A	0.65		1.40
A1	0.00		0.20
b	0.30		0.55
c	0.08		0.20
D	2.70		3.10
E	1.15		1.65
E1	2.10		2.80
e	1.70		2.10
L	0.15		0.50
L1	0.35		0.70
θ	0°		12°

SOT-523 Package Outline Dimensions

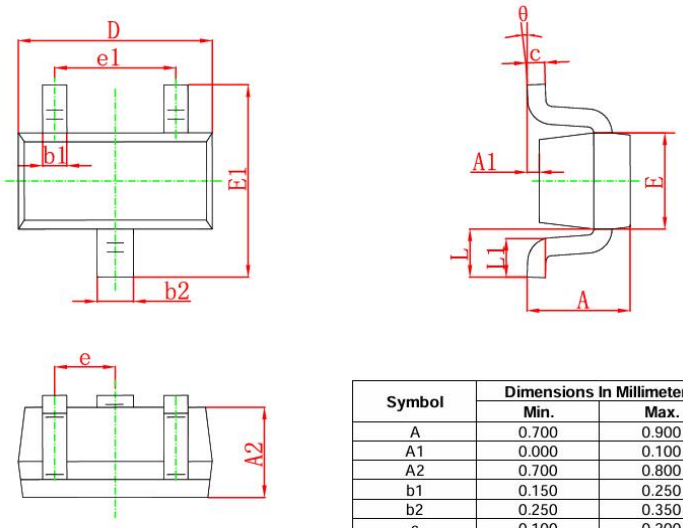

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-323 Package Outline Dimensions

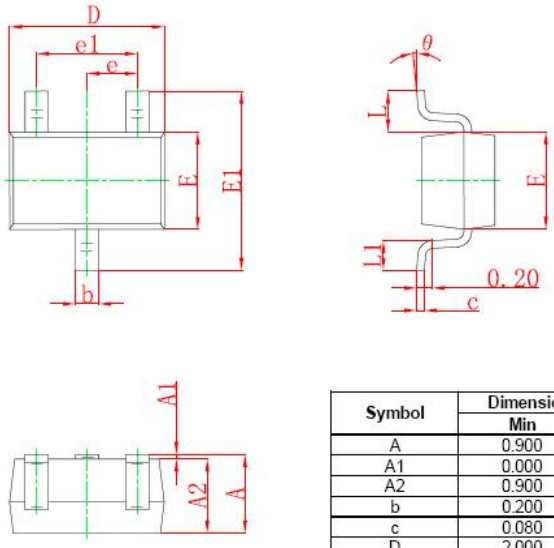

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

7.Important Notice and Disclaimer

Microdiode Semiconductor (Shenzhen) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design,purchase or use.

Microdiode Semiconductor (Shenzhen) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Microdiode Semiconductor (Shenzhen) assume any liability for application assistance or customer product design. Microdiode Semiconductor (Shenzhen) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Semiconductor (Shenzhen).

Microdiode Semiconductor (Shenzhen) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Semiconductor (Shenzhen).