Honeywell

Interactive Catalog Supplements Catalog PDFs

If you need detailed product information, or help choosing the right product for your application, see our Interactive Catalog. Use the Interactive Catalog to access the most complete and up-to-date information available.

The Interactive Catalog provides an extensive collection of product specifications, application data, and technical literature that can be searched based on criteria you select.

This PDF catalog information was published in November 2000.



Click this icon to try the Interactive Catalog.

Sensing and Control
Honeywell Inc.
11 West Spring Street
Freeport, IL 61032

www.honeywell.com/sensing


Manual Switches

AML21 Series

Electronic Control Pushbutton

INCANDESCENT OR NON-LIGHTED DISPLAY





Buttons ordered separately.

Electrical Data	page 11
Buttons	page 30/31
Lamps and LEDs	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/50

FEATURES

- 1, 2, or 4 poles.
- Silver or gold contacts.
- Full guard bezel option.
- Momentary or 2-level alternate action (push-on, push-off).
- UL recognized, CSA certified.
- Lamps can be furnished installed or ordered separately.
- Lamp circuit independent of switch circuit.

*AML21 Series: 1 pole and 2-pole only.

AML21 ORDER GUIDE

AML21 B **B** **A** **2** **AA**

Housing Type	Bezel Color	Incandescent Lamp Type	Terminal Type	Circuitry Codes (Each pole has double-throw)	
Standard Bezel: **AML21B** Square Non-Lighted **AML21C** Square 1 Lamp Ckt. **AML21E** Rect. Non-Lighted **AML21F** Rect. 1 Lamp Ckt. **AML21G** Rect. 2 Lamp Ckts. **Full Guard Bezel:** **AML21H** Square Non-Lighted **AML21J** Square 1 Lamp Ckt. **AML21K** Rect. Non-Lighted **AML21L** Rect. 1 Lamp Ckt. **AML21M** Rect. 2 Lamp Ckts.	**B** Black	**A** No Lamp Installed **B** 6 V Lamp* **C** 14 V Lamp* **E** 28 V Lamp*	**2** .110 × .020 (Solder or Quick-Connect) **3** .025 × .025 (Printed Ckt. or Push-On)	Silver Contacts	Mom. Action **AA** 1-Pole **AC** 2-Pole **CC** 4-Pole
					Alt. Action **AB** 1-Pole **AD** 2-Pole **CD** 4-Pole
				Gold Contacts	Mom. Action **BA** 1-Pole **BC** 2-Pole **DC** 4-Pole
					Alt. Action **BB** 1-Pole **BD** 2-Pole **DD** 4-Pole
				Gold-Plated Silver Contacts	Mom. Action **EA** 1-Pole **EC** 2-Pole
					Alt. Action **EB** 1-Pole **ED** 2-Pole

* Lamps will be installed per each lamp circuit specified in the Housing Type.

Example: **AML21BBA2AA**
Square pushbutton switch housing non-lighted; black bezel; .110 × .020 termination; momentary action; 1-pole, double-throw; silver contacts.

Manual Switches
Electronic Control Pushbutton

LED DISPLAY



Buttons with LED ''window'' ordered separately.

LEDs are not replaceable.

FEATURES

- Identical to AML21 switches, except furnished with high efficiency LED display.
- Rectangular LED's are flush with button surface, providing wide angle indication.
- Optional diode protection for LED's.
- 5 thru 24 VDC LED devices have an internal resistor to maintain current at nominal 20 mA.
- UL recognized, CSA certified.
- LED circuit independent of switch circuit.

Electrical Data	page 11
Buttons	pages 30/31
Lamps and LEDs	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/50

*AML22 Series: 1 pole and 2-pole only.

AML22 ORDER GUIDE

AML22 C | **B** | **B** | **2** | **AA**

Housing Type

Standard Bezel:
AML22C Square 1 LED
AML22H Square 1 High-Profile LED (For use with AML52-A buttons)

Full Guard Bezel:
AML22J Square 1 LED

Bezel Color

B Black

LED Color/ Voltage

Red
B V*
C 5V
D 10V
E 15V
F 24V
Yellow
H V*
J 5V
K 10V
L 15V
M 24V
Green
R V*
S 5V
T 10V
W 15V
X 24V

Terminal Type

2 .110 × .020 (Solder or Quick-Connect)

3 .025 × .025 (Printed Ckt., or Push-On)

8 .110 × .020 With Diode Protection for LED

Circuitry Codes (Each pole has double-throw)

Silver Contacts	Mom. Action **AA** 1-Pole **AC** 2-Pole **CC** 4-Pole
	Alt. Action **AB** 1-Pole **AD** 2-Pole **CD** 4-Pole
Gold Contacts	Mom. Action **BA** 1-Pole **BC** 2-Pole **DC** 4-Pole
	Alt. Action **BB** 1-Pole **BD** 2-Pole **DD** 4-Pole
Gold-Plated Silver Contacts	Mom. Action **EA** 1-Pole **EC** 2-Pole
	Alt. Action **EB** 1-Pole **ED** 2-Pole

* See LED information for devices without current limiting resistor, page 46.

Example: **AML22CBB2AA**
Square pushbutton switch housing with one LED, black bezel; red LED (without resistor); .110 × .020 termination; momentary action, 1-pole, double-throw; silver contacts.


CONTACT ARRANGEMENT

1, 2 or 4 poles: Form C



Manual Switches
Electronic Control Paddle

INCANDESCENT OR NON-LIGHTED DISPLAY



Covers ordered separately.

FEATURES

- Silver or gold contacts.
- 1, 2 or 4 poles.
- Toggle type paddle operators permanently installed in rectangular housings.
- Covers for the switch housing may be lighted or unlighted.
- UL recognized, CSA certified.
- Lamps can be furnished installed or ordered separately.
- Lamp circuit independent of switch circuit.

Electrical Data	page 11
Paddle Covers	page 35
Lamps and LEDs	page 46
Accessories	page 45
Mounting Dimensions	pages 47/50


*AML23 Series: 1 pole and 2-pole only.

***AML23 ORDER GUIDE**

AML23 E | **B** | **A** | **2** | **AA** | **01**

Housing Type	Operator/Bezel Color	Incandescent Lamp Type	Terminal Type	Circuitry Codes	Operating Action
AML23 E Rectangular Non-Lighted **AML23 F** Rectangular 1 Lamp Ckt. (A) **AML23 G** Rectangular 2 Lamp Ckts. (A & B)	**B** Black/Black	**A** No Lamp Installed **B** 6 V Lamp* **C** 14 V Lamp* **E** 28 V Lamp*	**2** .110 × .020 (Solder or Quick-Connect) **3** .025 × .025 (Printed Ckt., or Push-on)	Insert Code letters as shown in Circuitry Chart	Insert Code numbers from Operating Action Chart

* Lamps will be installed per each lamp circuit specified in the Housing Type.



① The ''MICRO SWITCH'' identification is shown on this side of the switch housings.

Example: **AML23EBA2AA01**
Rectangular non-lighted paddle switch housing; black paddle and bezel; .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).

CIRCUITRY


Silver Contacts	Gold Contacts	2-Position		3-Position			
AA	BA	3 2 1	3 2 1	3 2 1	3 2 1	3 2 1	
AC	BC	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4	
(Non-illuminated switches only)							
CA	DA	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4	
CC	DC	3 2 1 6 5 4 9 8 7 12 11 10	3 2 1 6 5 4 9 8 7 12 11 10	3 2 1 6 5 4 9 8 7 12 11 10	3 2 1 6 5 4 9 8 7 12 11 10	3 2 1 6 5 4 9 8 7 12 11 10	
(Non-illuminated switches only)							

OPERATING ACTION

2-Position:		
Maint.	**01** None	Maint.
Mom.	**02** None	Maint.
Maint.	**03** None	Mom.
3-Position:		
Maint.	**04** Maint.	Maint.
Mom.	**05** Maint.	Mom.
Maint.	**06** Maint.	Mom.
Mom.	**07** Maint.	Maint.

Manual Switches
Electronic Control Paddle

LED DISPLAY



Covers with LED ''window'' ordered separately.

FEATURES

- Identical to AML23, except furnished with one or two rectangular high efficiency LED's which give flush display area and wide angle indication.
- Available with or without diode protection for LED's.
- LED circuit independent of switch circuit.

Electrical Data	page 11
Paddle Covers	page 36
Lamps and LEDs	page 46
Accessories	page 45
Mounting Dimensions	pages 47/50

- 5 thru 24 VDC devices have internal resistor to maintain current at nominal 20 mA.
- UL recognized, CSA certified.

*AML25 Series: 1 pole and 2-pole only.


AML25 ORDER GUIDE

AML25 F	B	B	2	AA	01	R	X
Housing Type	**Operator/ Bezel Color**	**LED Voltage**	**Terminal Type/ Diode Protection**	**Circuitry Codes**	**Operating Code**	**LED Color (LED A)**	**LED Color (LED B)**
AML25 F Rectangular 1 LED **AML25 G** Rectangular 2 LED's	**B** Black/Black	**B** V* **C** 5 V **D** 10 V **E** 15 V **F** 24 V	**2** .110 × .020 (Solder or Q-C) **3** .025 × .025 (Printed Ckt., or Push-On **8** .110 × .020 w/Diode protection	Insert code letters as shown in Circuitry Chart LED version available only with **AA** **BA** **CA** **DA** circuitry	Insert code numbers from Operating Action Chart	**R** Red **Y** Yellow **G** Green **X** No LED	**R** Red **Y** Yellow **G** Green **X** No LED


* See LED application information for devices without current-limiting resistor, page 46.

Example: **AML25FBB2AA01RX**
Rectangular paddle switch; illuminated with one red LED, this device has a black paddle and bezel, and .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).

NOTE: For further information on replacement LED's, call the 800 number.

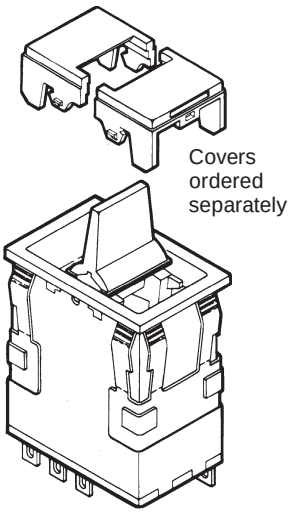

Covers ordered separately




① The ''MICRO SWITCH'' identification is shown on this side of the switch housings.

Manuals

Manual Switches
Electronic Control Rocker

INCANDESCENT OR NON-LIGHTED DISPLAY



Rocker operators ordered separately.

FEATURES

- Silver or gold contacts.
- 2 or 3 position operation.
- UL recognized, CSA certified.
- Lamps can be furnished installed or ordered separately.
- Lamp circuit independent of switch circuit.


Electrical Data	page 11
Rockers	page 39
Lamps	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/50

*AML24 Series: 1 pole and 2-pole only.

AML24 ORDER GUIDE

AML24 E	B	A	2	AA	01
Housing Type	**Bezel Color**	**Incandescent Lamp Type**	**Terminal Type**	**Circuitry Codes**	**Operating Action**
AML24 E Rectangular Non-Lighted **AML24 F** Rectangular 1 Lamp Ckt. (A) **AML24 G** Rectangular 2 Lamp Ckts.	**B** Black	**A** No Lamp Installed **B** 6 V Lamp* **C** 14 V Lamp* **E** 28 V Lamp*	**2** .110 × .020 (Solder or Quick-Connect) **3** .025 × .025 (Printed Ckt., or Push-on)	Insert Code letters as shown in Circuitry Chart	Insert Code numbers from Operating Action Chart






* Lamps will be installed per each lamp circuit specified in the Housing Type.



① The ''MICRO SWITCH'' identification is shown on this side of the switch housings.

Example: **AML24EBA2AA01**
Rectangular non-lighted rocker switch housing; black bezel; .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).

CIRCUITRY

Silver Contacts	Gold Contacts	2-Position	3-Position	
AA	BA			
AC	BC			
(Non-illuminated switches only)				
CA	DA			
CC	DC			
(Non-illuminated switches only)				


OPERATING ACTION



2-Position:		
Maint.	**01** None	Maint.
Mom.	**02** None	Maint.
Maint.	**03** None	Mom.
3-Position:		
Maint.	**04** Maint.	Maint.
Mom.	**05** Maint.	Mom.
Maint.	**06** Maint.	Mom.
Mom.	**07** Maint.	Maint.

Manual Switches
Electronic Control Rocker

LED DISPLAY



Rocker operators ordered separately.

LEDs are not replaceable.

FEATURES

- Identical to AML24, except furnished with one or two rectangular high efficiency LED's which give flush display area and wide angle indication.
- Available with or without diode protection for LED's.
- LED circuit independent of switch circuit.

Electrical Data	page 11
Rockers	page 40
Lamps and LEDs	page 46
Accessories	page 45
Mounting Dimensions	pages 47/50

- 5 thru 24 VDC LED devices have internal resistor to maintain current at nominal 20 mA.
- UL recognized, CSA certified.


*AML26 Series: 1 pole and 2-pole only.

AML26 ORDER GUIDE


AML26 F	B	B	2	AA	01	R	X
Housing Type	**Bezel Color**	**LED Voltage**	**Terminal Type/ Diode Protection**	**Circuitry Codes**	**Operating Action**	**LED Color (LED A)**	**LED Color (LED B)**
AML26 F 1 LED **AML26 G** 2 LED's	**B** Black	**B** V* **C** 5 V **D** 10 V **E** 15 V **F** 24 V	**2** .110 × .020 (Solder or Quick-Connect **3** .025 × .025 (Printed Ckt., or Push-On) **8** .110 × .020 w/Diode for LED protection	Insert code letters as shown in Circuitry Chart LED version available only with **AA** **BA** **CA** **DA** circuitry	Insert code numbers from Operating Action Chart	**R** Red **Y** Yellow **G** Green **X** No LED	**R** Red **Y** Yellow **G** Green **X** No LED

* See LED application information for devices without current-limiting resistor, page 46.

Example: **AML26FBB2AA01RX**
Rectangular rocker switch; illuminated with one LED, this device has a black bezel, .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).



① The "MICRO SWITCH" identification is shown on this side of the switch housings.

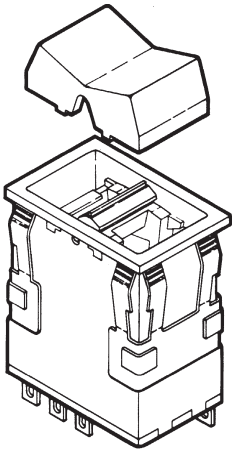


Rocker ordered separately

Manuals

Manual Switches
Electronic Control Keylock

NON-LIGHTED



FEATURES

- Enable control of access to computer peripherals, keyboards, point-of-sale terminals, and security systems which are locked when unattended; and other locations where tampering must be discouraged.
- 2 or 3 positions, maintained (90° throw) and momentary action (60° throw).
- 5-bit key combinations

Electrical Data	page 11
Accessories	pages 44/45
Mounting Dimensions	pages 47/50

- UL recognized, CSA certified.
- Static discharge protection (up to 20 kV when grounded).

AML27 ORDER GUIDE

AML27 A B K 2 AA 21 BA

Housing Type	Bezel Color	Button Color	Terminal Type	Circuitry Codes (Each pole has double-throw)
AML27 A Square housing Non-Lighted	**B** Black	**K** Black	**2** .110 × .020 (Solder or Quick-Connect) **3** .025 × .025 (Printed Circuit or Push-On)	**Silver Contacts:** **AA** 1 pole **AC** 2 pole **Gold Contacts:** **BA** 1 pole **BC** 2 pole

Operation Action (Key out in center position, except where noted)

CCW	Center	CW
None	**21** Maint.	Maint.
None	**22*** Maint.	Maint.
None	**23** Maint.	Mom.
Maint.	**24** Maint.	Maint.
Mom.	**25** Maint.	Mom.
Maint.	**26**** Maint.	Maint.
Mom.	**27***** Maint.	Maint.
Maint.	**28***** Maint.	Maint.
Maint.	**29**† Maint.	Maint.
Maint.	**30**† Maint.	Mom.
Maint.	**31**†† Maint.	Mom.

* Key out in both positions.
** Key out in all three positions.
*** Key out in center and CW positions.

Key ⚠ Combinations

(Two Keys Furnished)

BA	**BS**
BB	**BT**
BD	**BV**
BE	**BW**

28 and **29** operating actions should be used with Key Combinations BA and BB.

† Key out in center and CCW positions.
†† Key out in CCW only.

REPLACEMENT KEYS

One key per listing.

Key Combination	Key Code	Catalog Listing
BA	110	30PA101-AML
BB	109	30PA102-AML
BD	107	30PA104-AML
BE	106	30PA105-AML
BS	117	30PA117-AML
BT	118	30PA118-AML
BV	119	30PA119-AML
BW	120	30PA120-AML

Note: These keys fit the 5-bit keylocks in the Order Guide.

⚠ Specify different Key Combinations to acquire different keys, i.e.;
AML27ABK2AA21**BB** and
AML27ABK2AA21**BE** have different keys.
AML27ABK2AA21**BB** and
AML27ABK3BC25**BB** have identical interchangeable keys.


Example: **AML27ABK2AC28BB**
Square housing; black bezel and button; .110 × .020 terminals; 2-pole double-throw; silver contacts; 3-position maintained and key code ''BB''.

CIRCUITRY

2-Position Switches:

	Normal Position*	Key Turned to Right (CW)
1 Pole		
2 Pole		

3-Position Switches (Available in 2-pole only.)

	Key Turned to Left (CCW)	Normal Position*	Key Turned to Right (CW)
2 Pole			

* Circuit remains the same with key in or out.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Honeywell:

SSCSNBN005PDAA5 LSZ1MB SSCDLNN001PDAA5 SSCDRRN005PD2A3 SZL-VL-S-B-N-M 3106 00030136 LSZ4012 SSCDRNT1.6BAAA3 SSCDRRN001PD2A5 V15H16-CZ300A02-K SZL-VL-E LSZ1R SSCDANT030PASA5 SZRMY21PAC110120V SZL-WLC-A-N 14CX1 1865-13G-LDN SSCDRRN060MDAA5 SSCMANN006BGAA3 SZL-VL-S-G-N-M LSZ55D SSCDANN150PG2A3 SSCMRNN600MDAA5 3150U 00090147 SSCDRNN100PG2A5 SZL-WLC-A TSCSMNN100PDUCV LSZ1UB LSZ53 SSCMRRN005PD7A3