
AMP

OSMP Right Angle Cable Jack
Direct Solder Attachment 1056553–1


CONNECTOR TYPE	CABLE TYPE	TOOLS REQ'D
OSMP RIGHT ANGLE CABLE JACK DIRECT SOLDER ATTACHMENT	.047 S.R. COAXIAL CABLE	NONE

CONNECTOR




ASSEMBLY OPERATIONS


1.0 PREPARATION OF CABLE
1.1 TRIM CABLE TO DIMENSION SHOWN.

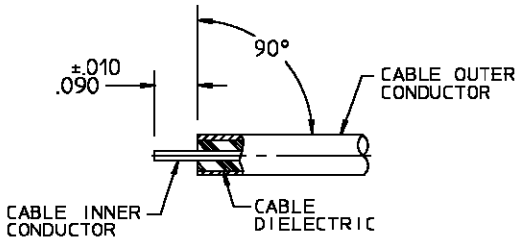


2.0 SHAPE INNER CONDUCTOR OF CABLE
2.1 FILE INNER CONDUCTOR TO LENGTH AS SHOWN.
2.2 FILE BLUNT END OF INNER CONDUCTOR TO AN 85°-90° CONE

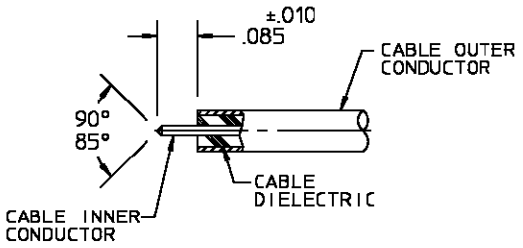

3.0 SOLDERING OF HOUSING SUB-ASSEMBLY TO CABLE
3.1 POSITION AND SECURE HOUSING IN A SMALL BENCH VISE.
3.2 CAREFULLY INSERT CABLE INNER CONDUCTOR INTO PRE-ASSEMBLED CENTER CONTACT OF HOUSING SUB-ASSEMBLY AND SEAT CABLE FIRMLY.
3.3 SOLDER CABLE TO HOUSING SUB-ASSEMBLY.

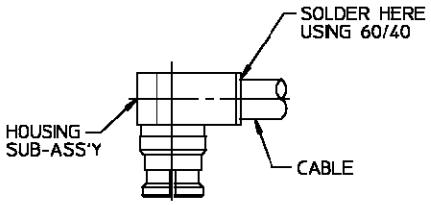

4.0 SEAL OPENING IN REAR OF HOUSING SUB-ASSEMBLY
4.1 PRESS CAP INTO OPENING IN REAR OF HOUSING SUB-ASSEMBLY.

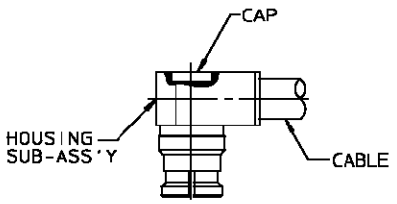

©2000 Tyco Electronics Corporation, Harrisburg, PA.
All International Rights Reserved.
*Trademark

This controlled document is subject to change.
For latest revision call the AMP FAX* number.
Dimensions are in inches.

TOOLING ASSISTANCE CENTER 1–800–722–1111
AMP FAX/PRODUCT INFO 1–800–522–6752

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-794222-0 CPF0402B37K4E1 RH73H2A40MKTN 1903112-2 1969656-1 2380312-2 650075-000 CRGCQ2010J3K3 SBCHE64R7K 936348-1 2-292161-3 3430B2F51RTDF 917696-1 MPT100C18RF SBCHE154R7K U5254-000005-030PA 1743455-2 175977-2 2834055-1 3631B101LL TE50BR39J 141991-2 2310537-1 SMW73R0JT 1393431-1 2005330-1 2377783-2 1-962915-1 3-1393225-0 ROX05SJ18R