

NSL-5152

10kΩ Dark Resistance Light Dependent Resistor (LDR) CdS Photocell

The NSL-5152 CdS photocell has a minimum of 10kΩ dark resistance, packaged in a two leaded plastic-coated ceramic header.

Advanced Photonix's CdS Photocells are photoresistor cells for visible light measurement designed to sense light from 400 to 700 nm. Their resistance decreases as the light level increases with efficiency characteristics similar to the human eye. These Light Dependent Resistors (LDR) are available in a wide range of resistance values. They are available in a two-leaded plastic-coated ceramic header or hermetically sealed TO metal cans.

Applications

- Industrial
- Audio Compressors
- Night Lights
- Photography Light Meters
- Solar Street Lights
- Flame Detection

Features

- Passive Resistance output
- Ceramic Package
- Available in Hermetically Sealed package
- Available in a wide range of resistance values

Absolute Maximum Ratings at T_A=23 ºC

Parameter	Symbol	Min	Max	Unit
Voltage (peak AC or DC)	V_{Peak}	-	100	V
Power Dissipation @25°C[1]	P_O	-	50	mW
Operating Temperature	T_{OP}	-60	+75	°C
Storage Temperature	T_{STG}	-60	+75	°C
Package	2-pin Ceramic			

[1] Derate linearly to zero at 75°C


Typical Electro-Optical Specifications at T_A=23 ºC

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Light Resistance	2fc, 2854K [2]	R_L	10	15	20	KΩ
	100fc, 2854K [2]	R_L	-	400	-	Ω
Dark Resistance	5 Sec. after removal of test light	R_D	10	-	-	KΩ
Spectral Peak	λ=Peak	λ_{Peak}	-	550	-	nm

[2] Cells light adapted at 30 to 50fc for 16 hours prior to electrical tests.

Mechanical Specifications

Units are in inches [mm]

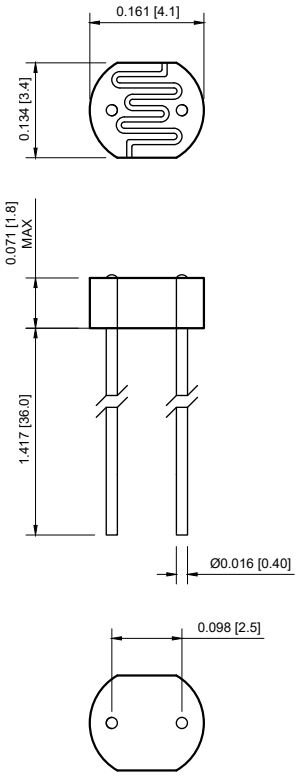

Note: Lead soldering temperature
(1/16 inches away from body) 260°C for 3 sec.

Advanced Photonix
A Division of OSI Optoelectronics

General Care and Handling Instructions

Photodiodes:

Handling and Storage

- Handle Photodiodes gently to prevent damage.
- Avoid exposing Photodiodes to temperatures exceeding the storage temperature rating of the device.
- Maintain a non-condensing environment for optimum performance and lifetime.

Cleaning

- Gently clean the glass (borosilicate or quartz window) using a 50/50 mixture of Methanol and isopropyl alcohol and a soft, optical-grade pad.

Special Considerations for Plastic or Epoxy Encapsulated Photodiodes

- Protect from intense light sources such as direct sunlight.
- Avoid exposure to harsh chemicals like THINNERS, ACETONE, and TRICHLOROETHYLENE.
- Cleaning with a 50/50 mixture of Methanol and isopropyl alcohol (IPA) is recommended. Cleaning in an ultrasonic bath is generally not recommended.

CdS Photocells:

Handling and Storage

- Handle CdS Photocells gently to prevent damage.
- Avoid exposing CdS Photocells to temperatures exceeding the storage temperature rating of the device.
- Maintain a non-condensing environment for optimum performance and lifetime.

Cleaning

- Gently clean the glass or plastic covering using a 50/50
- mixture of Methanol and isopropyl alcohol and a soft, optical-grade pad.

Special Considerations

- DO NOT use Vapor Phase Soldering or Reflow Soldering for CdS components.

Optocouplers and LEDs:

Handling and Storage

- Handle Optocouplers and LEDs gently to prevent damage.
- Avoid exposing the devices to temperatures exceeding the storage temperature rating of the device.
- Maintain a non-condensing environment for optimum performance and lifetime.

Cleaning

- For plastic molded devices, cleaning with a 50/50 mixture of Methanol and isopropyl alcohol is recommended. Cleaning in an ultrasonic bath is generally not recommended.

Special Considerations

- Avoid exposing plastic molded devices or epoxy glob top devices to harsh chemicals like THINNERS, ACETONE, and TRICHLOROETHYLENE.

Electrostatic Discharge (ESD) Sensitivity:

- All devices are considered ESD-sensitive. They are shipped in ESD protective packaging. When unpacking and using these products, anti-ESD precautions should be observed.

Lead Trimming and Bending:

- Standard lead trimming after soldering is an acceptable practice; however, do not attempt to bend or modify the leads incorrectly, as it can damage the glass feed-through or the plastic encapsulant.

Soldering Instructions:

- Use a soldering iron with a tip temperature of 300°C max.
- Consult with your preferred solder manufacturer to determine a solder alloy and flux combination, as well as the reflow profile appropriate for your application.

General Precautions for all Devices

1. **Moisture Prevention:**
   Ensure devices are stored in a dry environment to prevent moisture ingress, which can cause damage during soldering. Refer to J-STD-20 for guidance on proper baking procedures to prevent moisture related damage.
2. **Lead Splaying:**
   If required, carefully splay the leads of the devices according to the specific application needs. Be cautious when splaying leads, as improper techniques may damage the device. Consult technical support or device datasheets for guidance on lead splaying.
3. **Mechanical Stress:**
   Handle devices with care throughout the installation process to prevent damage.
4. **Circuit Protection and Layout:**
   Optimize the circuit design and layout to ensure proper functioning and prevent damage to the devices. Include appropriate protection measures like ESD protection diodes, current-limiting resistors, and voltage regulation.
5. **After-Sale Support:**
   For troubleshooting and device-specific inquiries, please consult with our technical support team. They can offer valuable guidance and suggestions on handling, operation, and application-related questions. To reach them, please contact the Advanced Photonix Applications group at Techsupport@advancedphotonix.com.

Legal Disclaimer

Information in this data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Advanced Photonix:

0050-3111-111 019-111-411 NSL-4960 PDV-P9203 SD200-12-22-041 118-23-21-021 APX-SC0010 NSL-5540 PDV-P9008 0090-3111-185 019-141-411-G PDB-C154SM 076-14-21-011 NSL-5150 PDB-V615-2 PDV-P8101 PDV-P9002 SD019-141-411-G NSL-19M51 PDB-C613-2 PDV-P5002 100-41-21-231 NSL-32SR2 PDV-P9004 PDV-P9200 100-12-22-021 NORPS-12 NSL-32SR3 NSL-5910 PDV-P8006