


REV	
B	DT04-4P-RT01

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P16233	10/11/99	WOODRUFF
A	REVISED PER E.O. P16526	2/4/00	C.WOODRUFF
B	REVISED PER E.O. P19626	4-21-08	

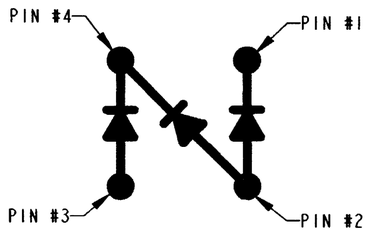



CIRCUIT DIAGRAM






3D VIEW
SCALE 3:2





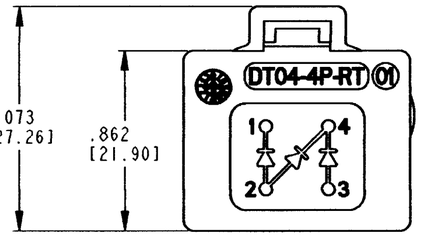

5. MOTOROLA DIODE P/N: MUR460G.
   PEAK REVERSE VOLTAGE = 600.0 V MAX.
   PEAK FORWARD VOLTAGE = 1.28 V MAX.
   AVERAGE FORWARD CURRENT = 4.0 A MAX.
   CONSULT THE FACTORY FOR DETAILED SPECIFICATIONS.
4. TEMPERATURE RANGE: -55°C TO +125°C.
3. RECEPTACLE MATES WITH DT06-4S-****.
2. ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE ±.025 [.63].

NOTES: 1. ALL DIMENSIONS ARE INCHES [METRIC].

	SIGNATURE & DATE
DR	J. APOSTOL 4FEB2000
CHK	R. Mesaya 4/14/08
PE	6-27-07
APPD	6-28-07
SCALE NONE	WT

4 WAY RECEPTACLE
TERMINATOR
DT SERIES

ENVELOPE

EP | MATL. CODE

DEUTSCH INDUSTRIAL
3850 INDUSTRIAL AVE.
HEMET, CA 92545

B | DT04-4P-RT01

DWG SIZE | CODE 11139 | SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

RH73H2A40MKTN 1393431-1 1969656-1 2-292161-3 CRGCQ2010J3K3 U5254-000005-030PA 1903112-2 2834055-1 3430B2F51RTDF 141991-2 2377783-2 3-1393225-0 650075-000 SMW73R0JT TE50BR39J 1743455-2 3631B101LL SBCHE154R7K 2005330-1 2380312-2 917696-1 CPF0402B37K4E1 1-794222-0 936348-1 ROX05SJ18R 2310537-1 MPT100C18RF 1-962915-1 175977-2 SBCHE64R7K