



环保物料

TEL:0769-82001899

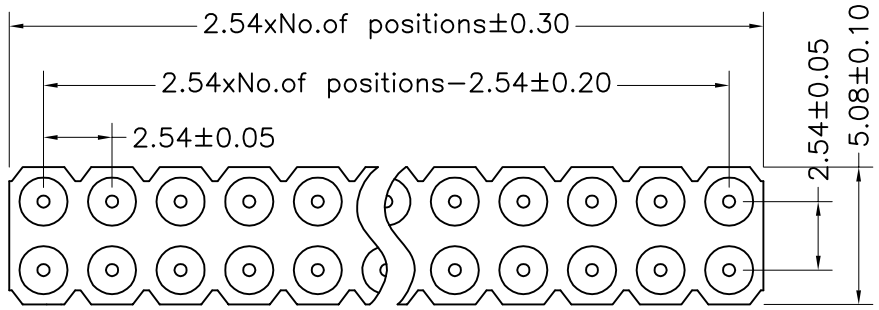

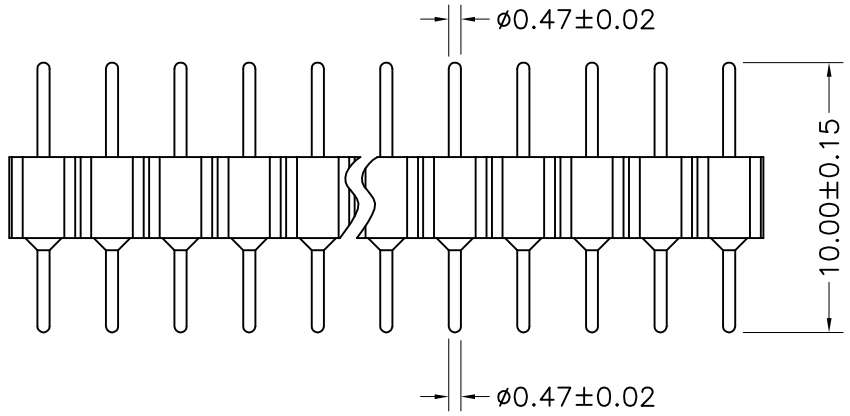

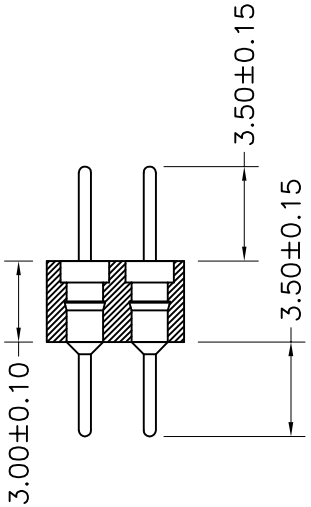

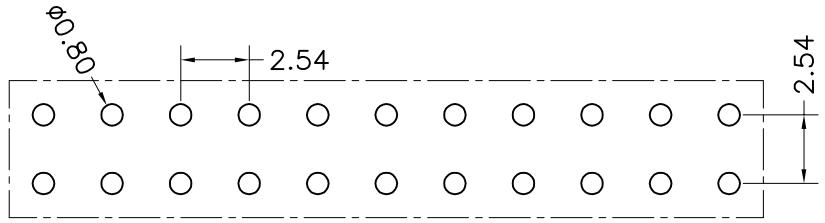

P.C.B LAYOUT

Technical Data

Materlal:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μ″NI,5μm/200μ″Sn

Gold Plated:2μm″/80μ″Ni,0.8μ″ gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Dleiectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

Mechanical:

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE					
X.	±0.30	X°	±5°	DRAWN	CK tan
.X	±0.20	.X°	±2°	CHKD	
.XX	±0.08	.XX°	±1°	APPD	
.XXX	±0.03	.XXX°	±0.5°	VIEW	

XFCN 兴飞连接器有限公司
XFCN CONNECTORS CO.,LTD.

PRODUCT NAME	2.54mm Machined Pin Header
PART. NO.	MH254V-12-xx-1000-047

SHEEI	1/1
DATE	2020.04.12
UNITS	mm
SCALE	1:1
DWG NO.	009

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

M2501RF-08P M3025R-2x10P M3960R-04P M3961R-02P M3961V-05P M4202V-K-2x2-N2
MF254V11-05-1000-H70 M1010VS-2x08P M4202V-2x7P PM254V-12-08-H85 TT56120177-1385
M2016VS-04P M2501R-K-04P M3025R-1x6P M1510V-09P M2016R-07P M2029VS-06P M2510V-05P
M3025V-2x7P MF200V-12-20-0740 M3965V-10P PM200V-11-12-H43 PZ254R-12-20P M1201RS-06-BK
M2020V-2x6P M2508R-08P M3025V-2x11P PM200VS-12-08-H43 M0611RS-10-GB M1010VS-2X10P