IP68 RATING

DC axial fans

Series 630 U 60 x 60 x 25 mm




Highlights:
– Motor protection against reverse polarity and locking.
– Air exhaust over struts
– Connection via 310 mm strands AWG 22, TR 64, bared and tin-plated
– Ingress protection rating of IP68


Material: Housing: Fiberglass-reinforced PBT composite
Impeller: Fiberglass-reinforced PA composite

Direction of rotation: Clockwise, seen on rotor

Nominal Data	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Ball bearings	Power input	Speed	Temperature range	Mass	Ingress Protection Rating	UL Approval	Curves
Type	**CFM**	**VDC**	**VDC**	**dB(A)**	**Bel(A)**		**Watts**	**RPM**	**°C**	**g**			
632 NU	**23.5**	12	6...15	34	5.1	Yes	1.8	5900	-20...70	70	IP68	Yes	1
634 NU-004*	**23.5**	24	12...30	34	5.1	Yes	1.6	5900	-20...70	70	IP68	Yes	1
632/2HPU	**25.9**	12	11...13	35	5.4	Yes	1.5	6300	-20...70	70	IP68	Yes	2
634 HHU	**34.1**	24	18...28	44	6.1	Yes	3.2	8500	-20...70	70	IP68	Yes	3

Curves

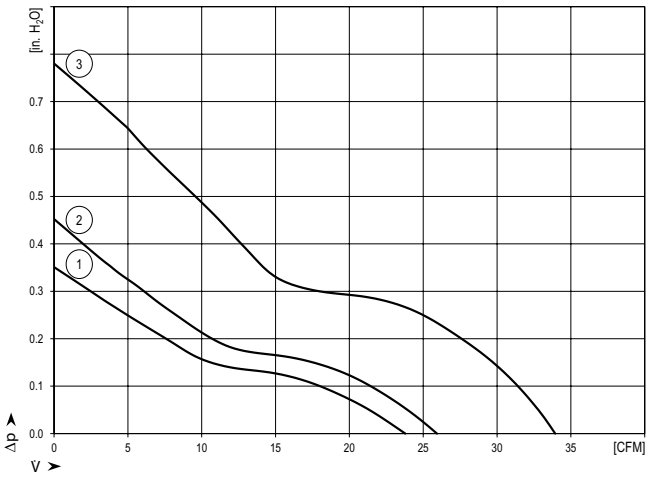

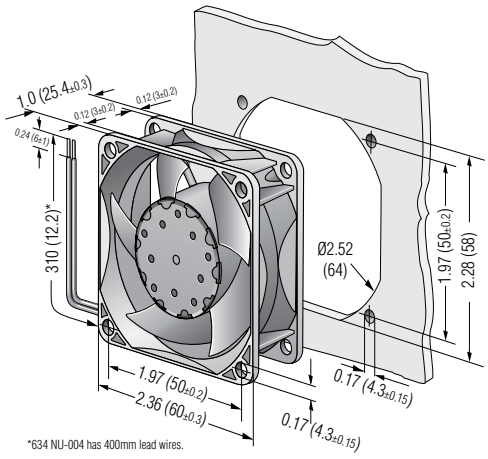

*634 NU-004 has 400mm lead wires.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ebmpapst:

96358-2-4013 QG030-148/12 4412F/2M-504 4412 F/2 6248N A2D300-AD02-02 W2S130-AA03-01
4114N/2H4 7114NH 8315100059 8315100283 A2D170-AA04-01 G2E140-AI28-01 G2E146-BF05-29
4414FNH 7212N 8315100229 3806 4314NHH 4650X RG160-28/14N 8312 8412N/2G-185
R2E175-AC77-05 R2E180-AS77-40 4414 F/2M 4600Z-881 LZ 30-5 PMFA80 4580 Z