

R/A MALE RECEPTACLE FOR PCB


SMT TYPE

R114.664.000

Series : **SMB**

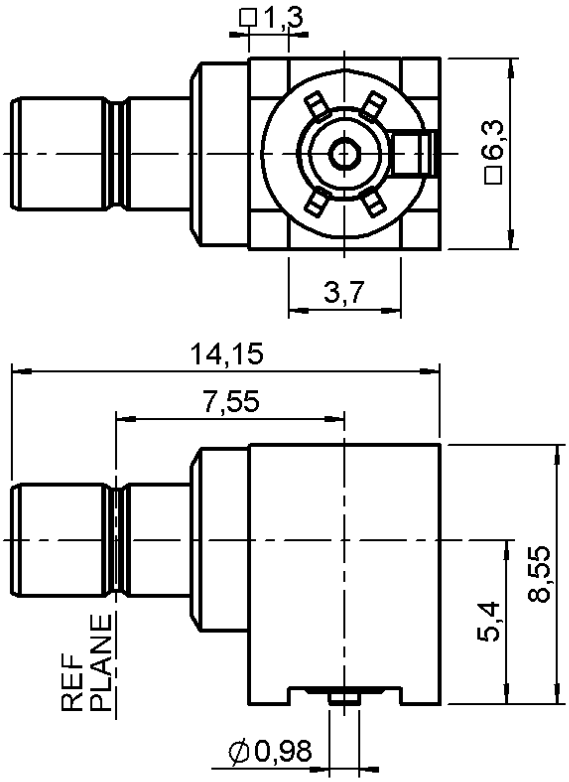

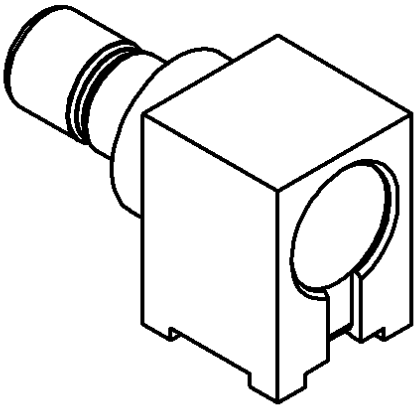



All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
CENTER CONTACT	**BRASS**	**GOLD 1.3 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
-	-	-
-	-	-

Issue : 0427 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

R/A MALE RECEPTACLE FOR PCB

SMT TYPE

R114.664.000

Series : **SMB**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**1.2** +	**0.000**	x F(GHz) Maxi
Insertion loss		**NA**	√F(GHz) dB Maxi
RF leakage	- (	**NA**	- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**1000**	Veff mini
Insulation resistance		**1000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

OTHERS CHARACTERISTICS

Assembly instruction **NA**

Others :
* Coaxial Transmission Line Only

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**10**	N mini
Axial force – Opposite end	**10**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**500**	Cycles mini
Weight	**2.640**	g

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

R/A MALE RECEPTACLE FOR PCB

SMT TYPE

R114.664.000

Series : **SMB**

SOLDER PROCEDURE

1. Deposition of solder paste 'Sn Ag4 Cu0.5' on mounting zone by screen printing application.
   We recommend a low residue flux.
   We advise a thickness of 200 microns (7.800 microinch).
   Verify that the edges of the zone are clean.


2. Placement of the receptacle on the mounting zone. Video camera is recommended for the positioning of the component. Adhesive agents must not be used on the receptacle.

3. Soldering by infra-red reflow.
   Below, please find the typical profile to use.

4. Cleaning of printed circuit boards by CFC solvents (or a substitute product according the United Nation's environmental programm)

5. Checking of solder joints and position of the component by visual inspection.

TEMPERATURE PROFILE

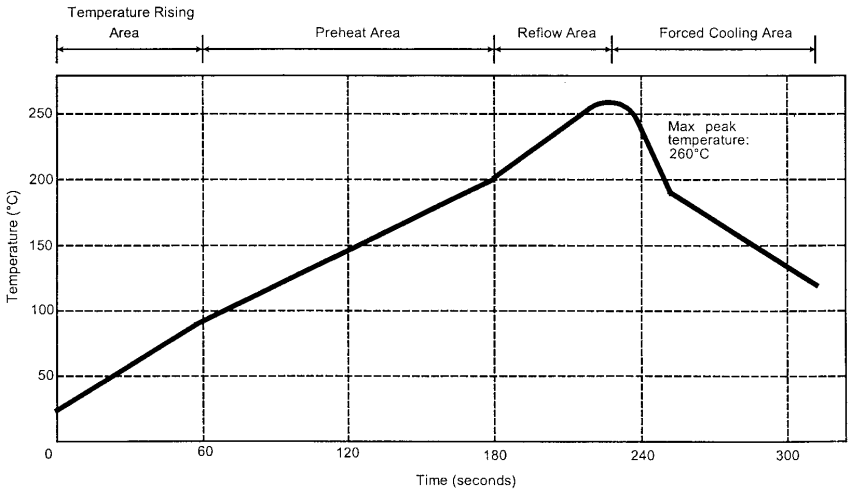

Parameter	**Value**	**Unit**
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®


R/A MALE RECEPTACLE FOR PCB

SMT TYPE

R114.664.000


Series : **SMB**

SMB SERIES - INFORMATIONS

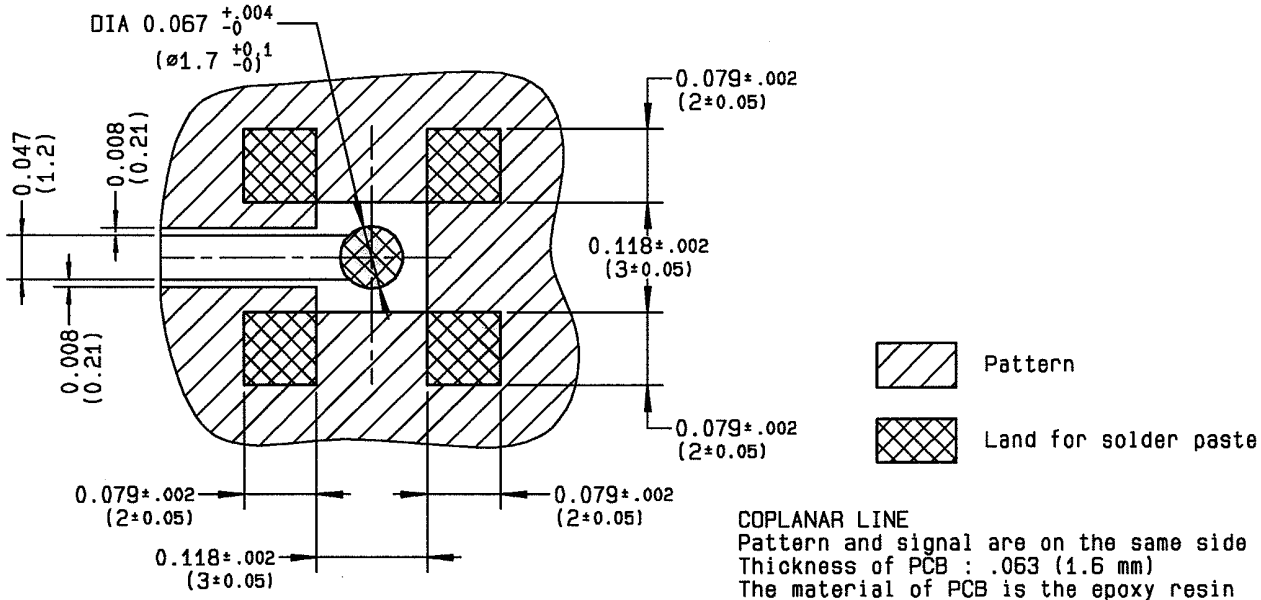

COPLANAR LINE
Pattern and signal are on the same side
Thickness of PCB : .063 (1.6 mm)
The material of PCB is the epoxy resin of glass fabrics bacs.(Er = 4.8)
The solder resist should be printed exept for the land pattern on the PCB.

SHADOW OF SMB RECEPTACLE FOR VIDEO CAMERA

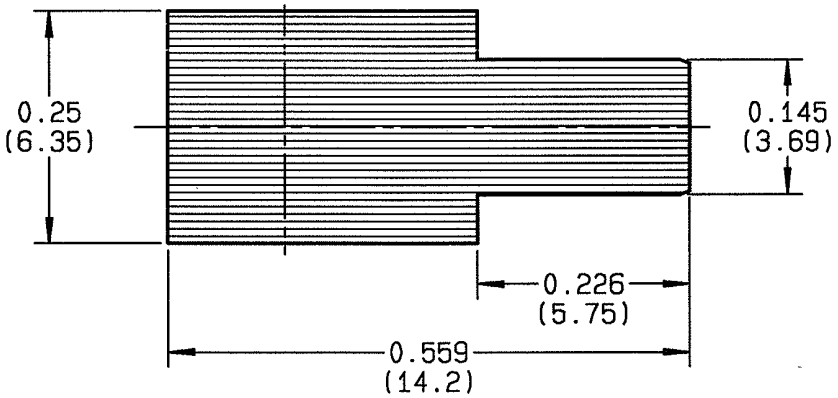

Issue : 0427 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R125326000 R141407000W R180160007 EPXBE13P1SB R114554000W R143012000 R223424000 R929104/C290004-20CM EPXBE28SA R112186000 R142703000 R180300007W R191329000 R284C0351026 R284C0351003 R316553000 R929101/C290001-10CM R284C0351050 R124510000W R125403001 R161325000W R191405000 R125078000W R141557000W R191303000 R112553000 R114165000W R142076161 R284C0351015 R284C0351054