


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.07.17	阿 树

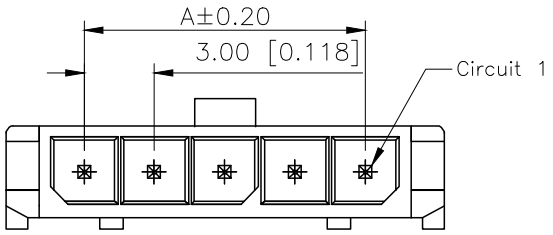

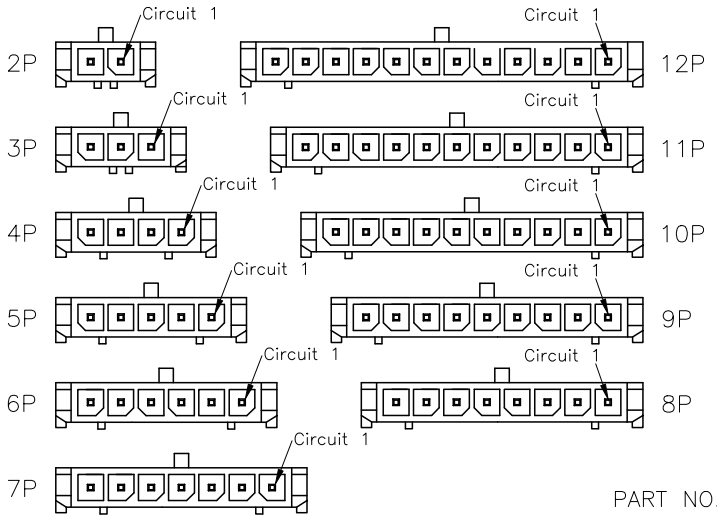

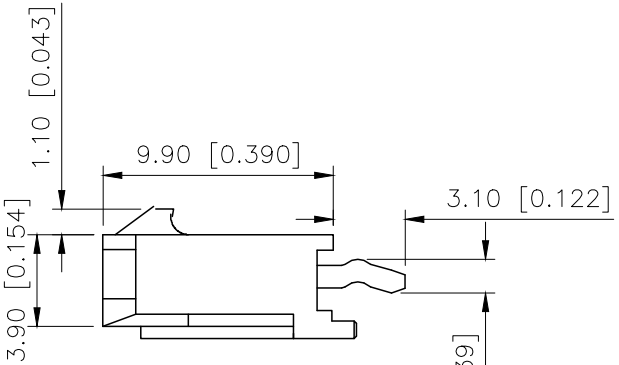


■SPECIFICATIONS
- •Voltage rating:250V AC/DC
- •Current rating:5A AC/DC
- •Withstanding Voltage:1500V AC/minute
- •Temperature range:−45°C+125°C
- •Insulation resistance:≥1000MΩ
- •Contact resistance:≤10mΩ
- •After environmental testing: ≤20mΩ


PART NO.:

X3025 W V−09−N0 SW XX
① ② ③④ ⑤ ⑥ ⑦

① Series No
② Category:W−Wafer
③ Welding Board Angle:V−Straight 180°
④ Row No−Pin No: XX−02P~12P
⑤ Material:66−PA66 UL94V−0
N0−PA9T UL94V−0
46−PA46 UL94
⑥ Planting:SW−Matte Tin
⑦ Color:Blank−natural color Black

Poles	Dimensions (mm)		
	A	B	C
02	3.00	9.65	9.00
03	6.00	12.65	12.00
04	9.00	15.65	15.00
05	12.00	18.65	18.00
06	15.00	21.65	21.00
07	18.00	24.65	24.00
08	21.00	27.65	27.00
09	24.00	30.65	30.00
10	27.00	33.65	33.00
11	30.00	36.65	36.00
12	33.00	39.65	39.00

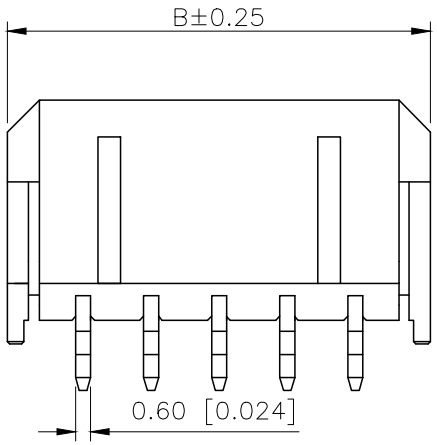

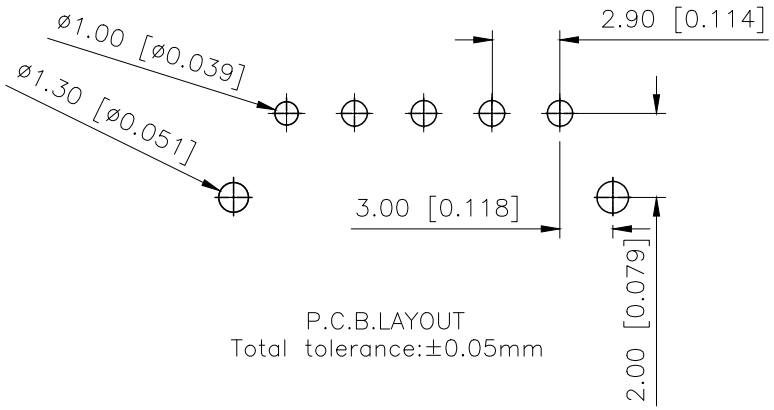

P.C.B.LAYOUT
Total tolerance:±0.05mm

PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Housing
X3025WV−09−46SW	PA46 UL 94V−0	Brass	Tin−Plated	X3025H
X3025WV−09−9TSW	PA9T UL 94V−0			
X3025WV−09−N0SW	PA66 UL 94V−0			

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	阿 树	VIEW:	MODEL TYPE: 3.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X3025WV−09−N0SW
APPROVED		SIZE: A4	DWG NO.: X−X3025WV−09−N0SW

SCALE	PAGE	REVISION
N/A	1/1	A1