
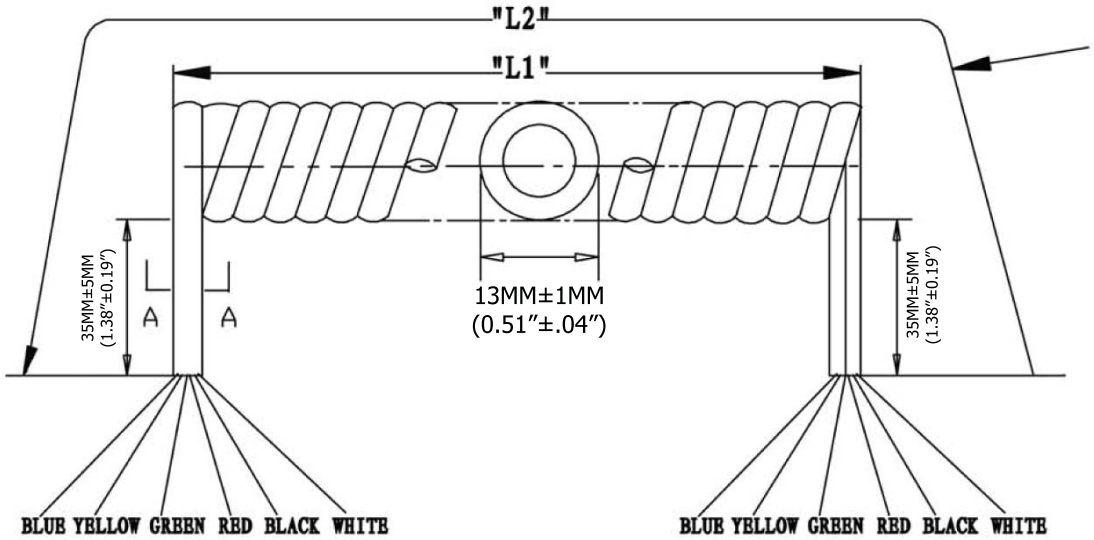


Extended length is with 500g of force

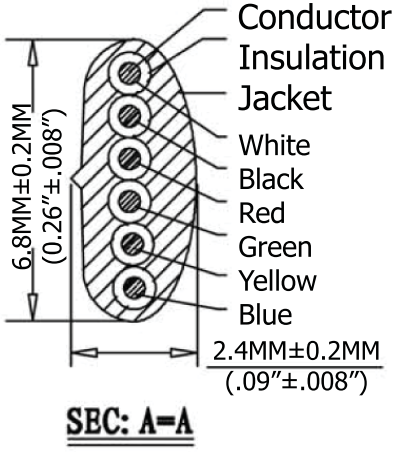

SEC: A=A

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	29.5 Inches
2,133.6MM-2,453.64MM	749.3MM

Material:

- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.02.11	Chappell
Approved		

ASSMANN WSW components

Item No. AT-K-C-26-6-W/7-R

Title NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*6.8MM, Pre-Cut, 7Ft. White

Drawing No. **rev00**

Replace | Sheet

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ASSMANN WSW Components:

A-HDS 26 A-KG/T AGP 09 G-METALL AWHW20A0202T AR 20-ST/T AW 122-20/G-T A-DS-09-PP/Z AWHC 10-0111-T AGP09G-NEW A-DC 09 S/W AWHW20G-0202-T AK170-3 A-LED8-1WBAS-MR7-1 AMET-09 RS A 40-LC-TT V7466X AWHW 10G-SMD A-20140 A-DSF 09 LPIII/FP AGP 09 G-ME AR08-HZL-TT V8508B-L AWP 08-7240-T V-1103-SMD/A V8510B-T AKABUSBAFS1M AMET-25 RS-45 A-HOOD-09/15 A-USBP-B-N A08-LC-TT V5583E