


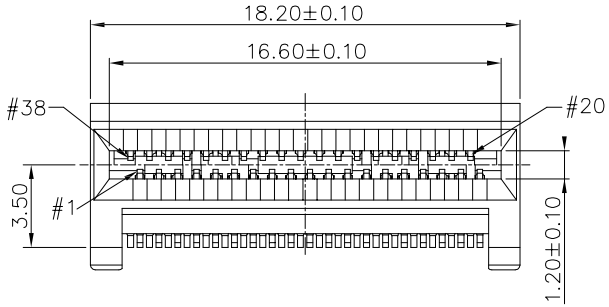


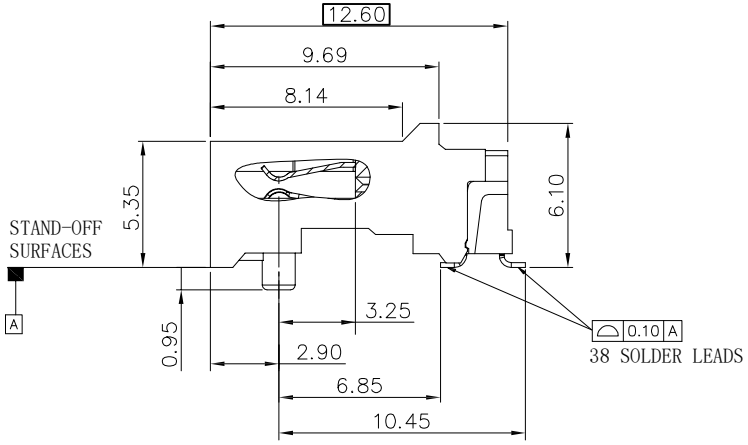

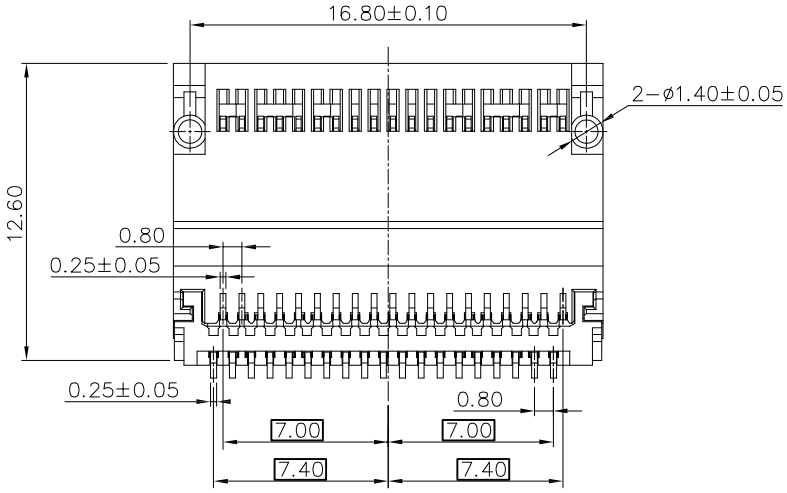

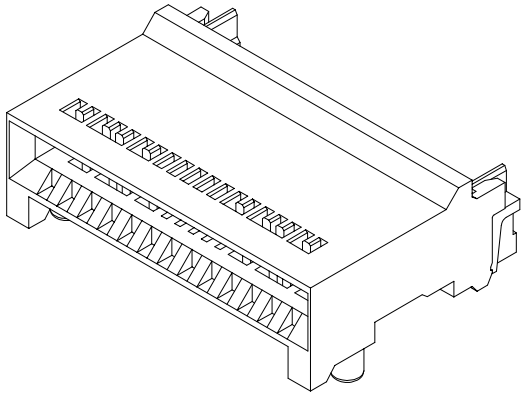

NOTES:
1. MATERIAL: HOUSING: HIGH TEMERATURE LCP, BLACK, UL 94 V-0 FLAME RETARDANT.
2. TERMINAL : COPPER ALLO
PLATING SPEC AS BELOW:CONTACT AREA PLATE NICKEL 1.25um MIN, PLATE Gold 0.76um MIN; SOLDER AREA PLATE NICKEL 1.25um MIN, PLATE MATT TIN 1.5~4.5um;
3. ELELCTRICAL CHARACTERISTICS
CONTACT CURRENT RATING:0.5A MPERE
VOLTAGE RATING:30VAC
CONTACT RESISTACE:50 MILLOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE:300VD
4. ENVIRONMEENT
OPERATION TEMPERATURE:-40° C TO 85° C

TOLERANCE	
LINEAR	ANGLES
X.±0.40	X°.± 3°
.X±0.30	.X°± 2°
.XX±0.20	.XX°± 1°
.XXX±0.10	.XXX°± 0.5°

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED


APPD: Jason | MAT'L:
CHKD: Schumi | FINISH:
DRWN: Lei Songping | Q'TY:

TITLE: QSFP28 CONNECTOR ASSEMBLY 38 POSITION
PART NO. UMAX952L0301
DWG NO. C-UMAX952L

UNITS	SCALE	SHEET	REV
MM	1 : 1	1 OF 2	A0


REV	ECN NO.	NAME	DATE


CUSTOMER

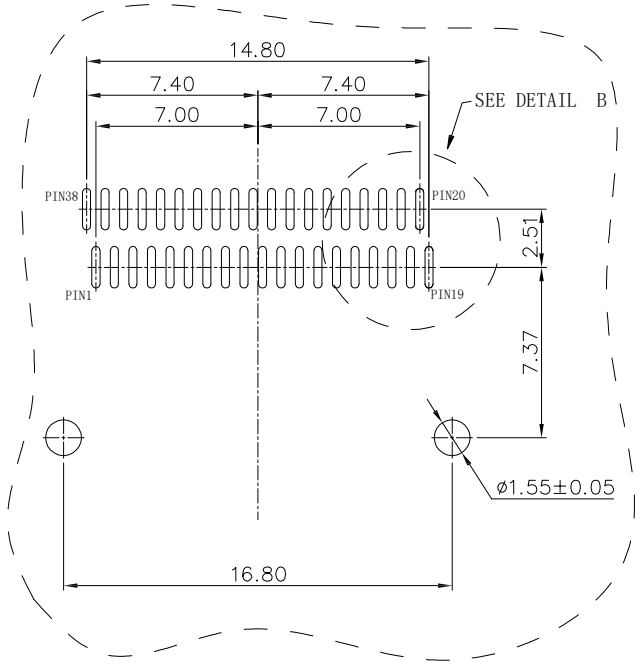


PCB LAYOUT


PCB TOLERANCE ±0.05

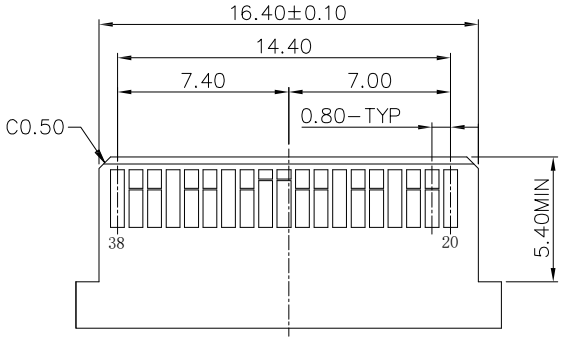




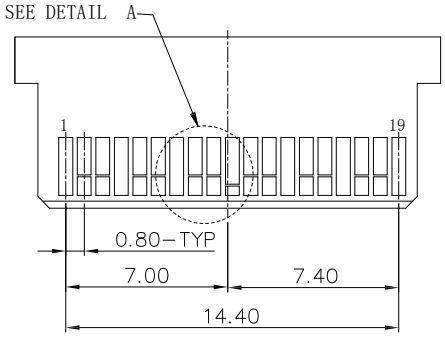

QSFP28 MOUDLE CARD

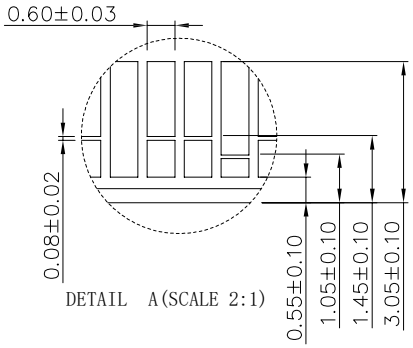

DETAIL A(SCALE 2:1)

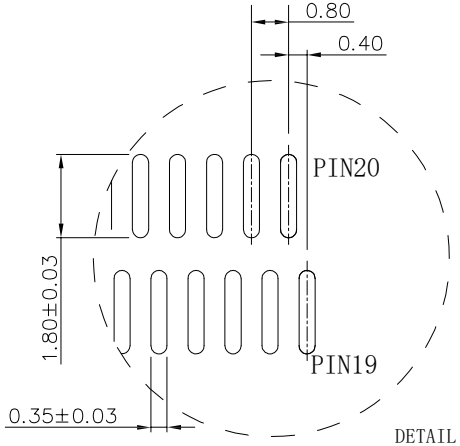

DETAIL B(SCALE 2:1)

TOLERANCE	
LINEAR	ANGLES
X.±0.40	X°.± 3°
.X±0.30	.X°± 2°
.XX±0.20	.XX°± 1°
.XXX±0.10	.XXX°± 0.5°

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED

APPD: Jason | MAT'L:

CHKD: Schumi | FINISH:

DRWN: Lei Songping | Q'TY:

TITLE: QSFP28 CONNECTOR ASSEMBLY 38 POSITION

PART NO. UMAX952L0301

DWG NO. C-UMAX952L

UNITS	SCALE	SHEET	REV
MM	1 : 1	2 OF 2	A0

REV	ECN NO.	NAME	DATE

CUSTOMER

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

UMaxconn:

UMAX7101201 20912-115110C KSP20LG154 91304-70-052R2 91619-110142D 91304-68-052R2 UMAX95112101 UMAX7412821 UMAX7111201 3091-10102T 91302-42-067RDM 91619-110141D 3157-00102D PCIE-G4-164-0300-EC-0018 D4260-4001RR 91304-40-052R2 90411-151131 UMAX7412401 91304-56-052R2 91619-110140D 91652-12013CHF 91302-85-067RCB 3091-10103T 91302-32-067RDM 3157-10100D 3126-10102D UMAX95202101 91613-110140D 91613-110143D 3183-10111P1T