Data Sheet


HUBER+SUHNER

Coaxial PCB Connector
82_MMBX-S50-0-13/111_N

Description

Straight PCB jack

Interface Standards
SUHNER-MMBX

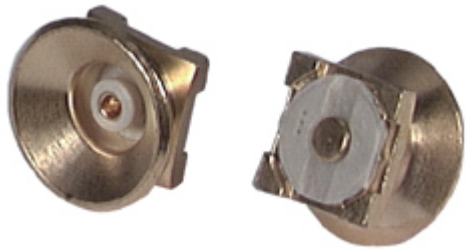

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	12.4 GHz

Mechanical Data

Board mounting type	surface mount
Weight	0.0008 kg

Environmental Data

Operating temperature	-55 °C to 155 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Brass	SUCOPRO Plating
Outer contact	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	LCP (Liquid crystal polymer)	

Related Documents

Outline drawing	DOU-00001894
Catalogue drawing	DCA-00087583
Mounting hole	DOU-00012611

Ordering Information

Bulk 100 pcs package	82_MMBX-S50-0-13/111_NH
Tape and Reel package	82_MMBX-S50-0-13/111_NM
Single package	82_MMBX-S50-0-13/111_NE

Remarks

PCB connector with stand-offs

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Huber+Suhner:

80345518 PCRS_LCUX_LCUX_A221T_01.0_SS 22512281 84000918 ST18A/Nm/Nm/3000mm 84057576 1399.31.0020 22540198 6806.19.A 11_SMC-50-2-10/111_NE 1399.17.0231 23002145 30-07835-10/A MINIBEND R-10 1399.17.0122 24_BNC-50-2-1/133_NE G032D/Nm/SMAm/1000 PCRS_LCMX_LCMX_O421T_05.0_LL 33_PC24-SK-50-2/199_NE 84093961 G032D/BNCm/BNCm/1000 PS12_SCUS_0000_SM09E_02.0_S0 PCRS_LCUX_LCUX_A221T_20.0_SS 11MMBXEF31616MMBX/300 1399.17.0210 16_MMCX-50-2-4/111_OH 3404.00.0012 82_MMCX-S50-0-2/111_KH 31_N-50-0-2/133_NE 24_SMA-50-2-15/111_NH