

REV.	DATE	DESCRIPTION
A	01/25/99	ADD MOUNTING HOLE DIMENSION
B	06/14/07	UPDATE DRAWING FORMAT

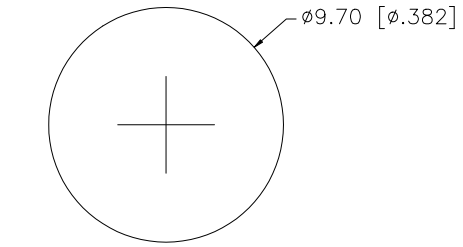

RECOMMENDED
MOUNTING HOLE DIMENSIONS

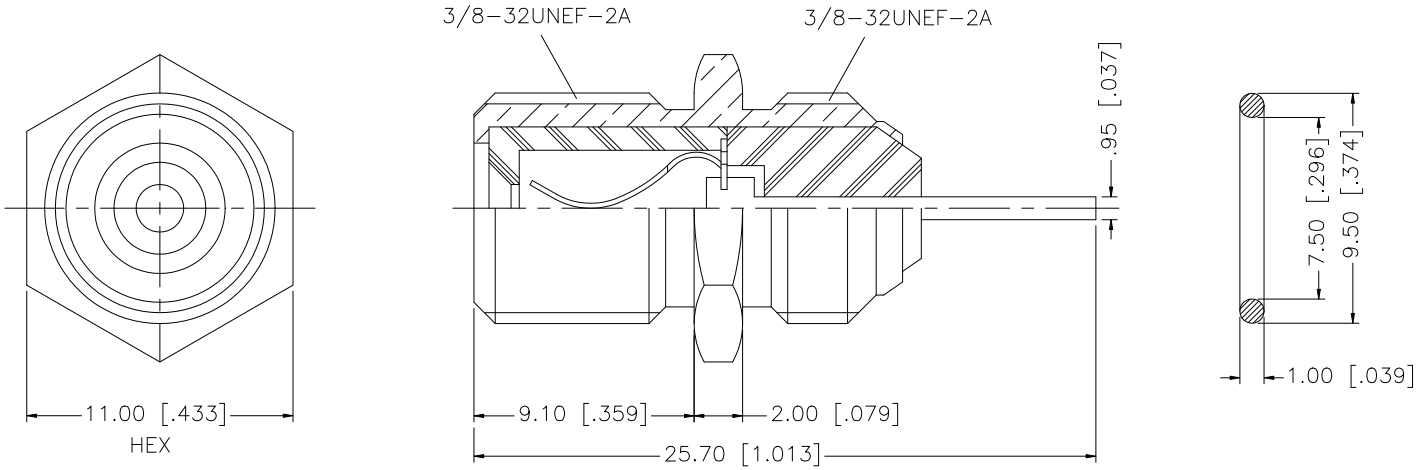

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5	GASKET	N.B.R.	BLACK	1
4	INSULATOR	DELRIN	NATURAL	1
3	CONTACT PIN	BRASS	BRIGHT TIN	1
2	INSULATOR	P.P	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	06/14/07
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/222/222144.DWG

Amphenol Connex

PART DESCRIPTION
F STRAIGHT RECEPTACLE – EXTENDED CONTACT

PART NO. 222144

DWG. NO. 222144.DWG | REV. B | SIZE A | SCALE NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-S08-07LF 68002116HLF 70430-164LF DAPO15S365TLF 70234-112LF LD25S33E4GV00LF DCMF37P 76384-316LF 68001-108HLF 95157-140LF CD15S13E4RV09LF RJE061661210 68000-236HLF LD15P33E4GV00LF 54202-G0805CLF 67996-204HLF 70218-1116LF 86093968191755E3LF 86093968813H45V1LF 863013A RJSBE5080C2 65781-158 D15P13A6RV12LF DEM09P032N 86093488314745V1LF 68001-200HLF 86093967896755LF 91614-403ALF 69192-408HLF 86130202123355E1LF