


PAGE **1/5**	ISSUE **03-02-17B**	SERIES **MMS**	PART NUMBER **R209408012**

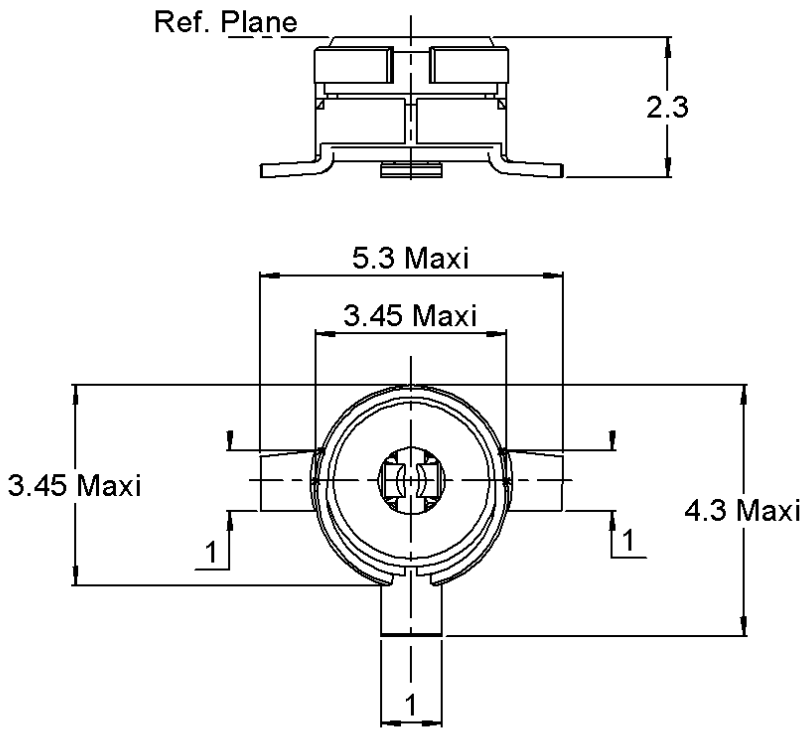



Scale: 1/1

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	**PHOSPHOR BRONZE**	**GOLD 0.2 OVER NICKEL 2**
Center contact	**BERYLLIUM COPPER**	**GOLD 0.2 OVER TIN NICKEL 2**
Outer contact		
Insulator	**PTFE**	
Gasket	**-**	
Others parts	**-**	-
-	**-**	-
-	**-**	-

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

PACKAGING

Standard	Unit	Other
100	**Contact us**	**Contact us**

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-6**	GHz
VSWR	* +	**0,0000**	x F(GHz) Maxi
Insertion loss		**	√F(GHz) dB Maxi
RF leakage	- (	**NA**	- F(GHz)) dB Maxi
Voltage rating		**50**	Veff Maxi
Dielectric withstanding voltage		**250**	Veff mini
Insulation resistance		**500**	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	**NA**	N mini
Axial force – Opposite end	**NA**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**50**	Cycles mini
Weight	**0,0590**	g

ENVIRONMENTAL

Operating temperature	**-40/+125**	°C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

SPECIFICATION

OTHER CHARACTERISTICS


Assembly instruction:

Others:
***1.2 à 2GHz/Avg 1,07 **Max 0.07/Avg 0.06**

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

MMS SERIES – INFORMATION

Coplanar line : Ground and signal are on the same side . Thicknass of PCB : 1mm
The material of PCB is glass-epoxy composite. (Er = 4.8)
The sold er resist should be printed except for the land pattern on the PCB.

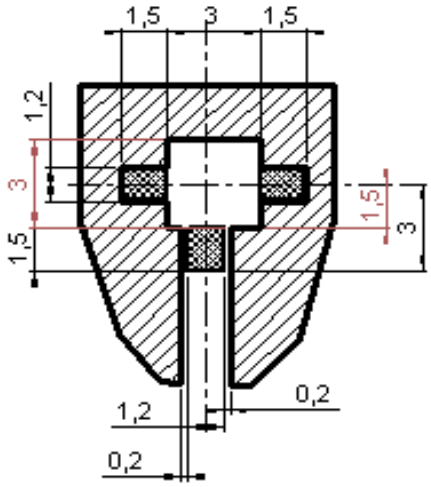


Pattern


Land for solder paste

SHADOW OF MMS RECEPTACLE

FOR VIDEO CAMERA

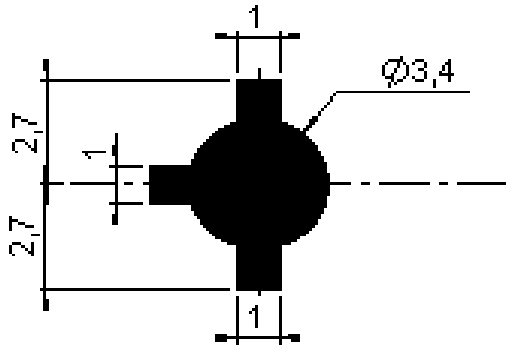

ASPIRATION AREA



ASPIRATION AREA

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

SOLDER PROCEDURE

1. Deposit solder paste 'SnAg4Cu0.5' on mounting zone by screen printing application. We recommend a low residue flux. We advise a thickness of 150 micromm (5.850 microinch). Verify that the edges of the zone are clean.


2. Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type.

3. Soldering by infra-red reflow.

4. Cleaning of printed circuit boards.


5. Checking of solder joints and position of the component by visual inspection.


TEMPERATURE PROFILE

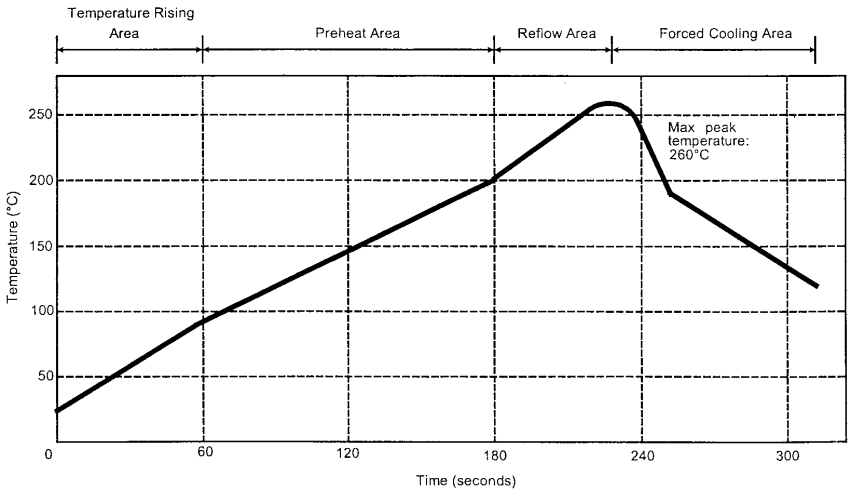

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

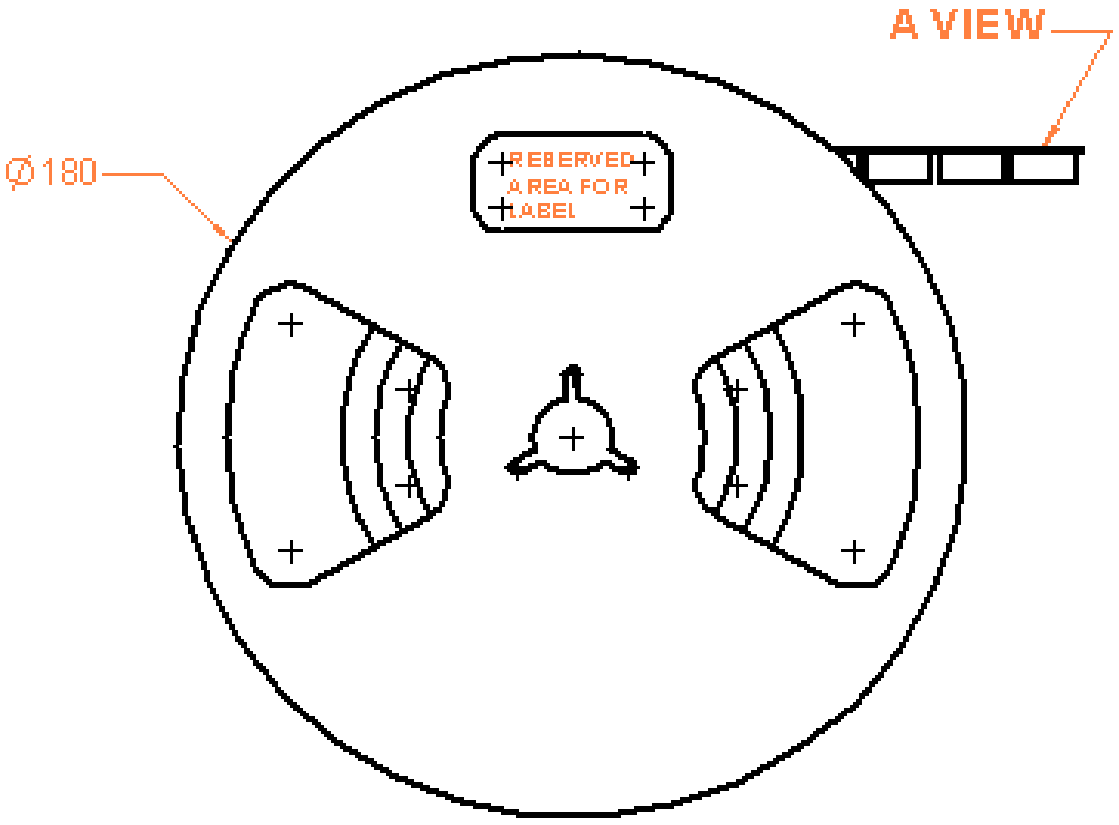

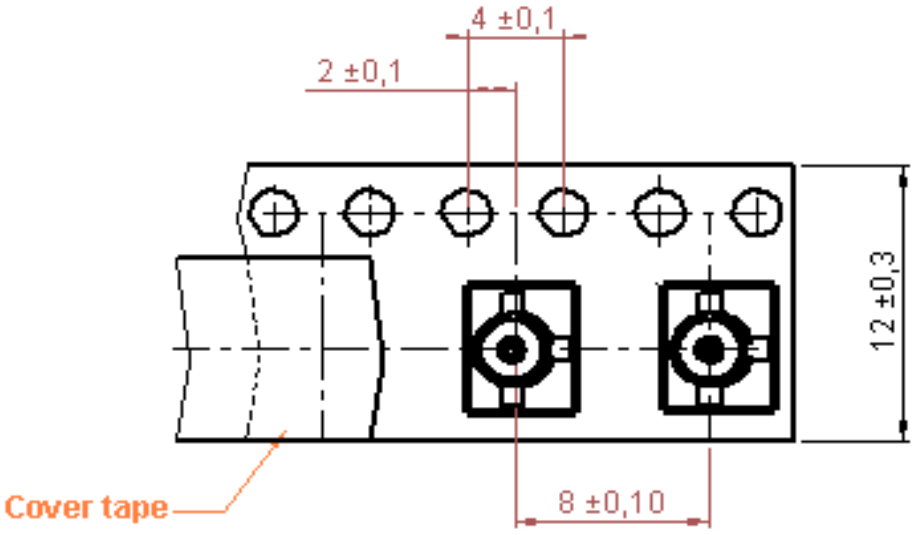

A VIEW (scale : 4)

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Radiall:

R125078000W R143012000 R191329000 R284C0351026 R112553000 R114554000W R141407000W R142703000 R284C0351015 R316553000 R929101/C290001-10CM EPXBE28SA R112186000 R124510000W R125403001 R191405000 R284C0351054 R142076161 R284C0351050 R125326000 R180300007W R284C0351003 R161325000W R114165000W R223424000 R929104/C290004-20CM EPXBE13P1SB R141557000W R180160007 R191303000