标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE





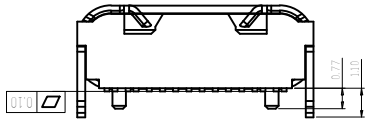

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

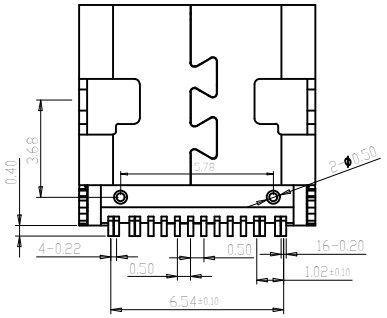

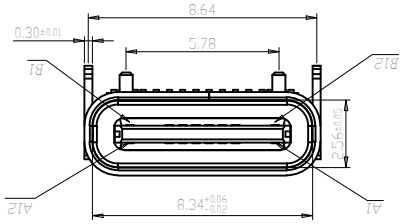

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
   - 1-1. CONTACT RESISTANCE: 30mΩ MAX.
   - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
   - 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
   - 2-1. INSERTION FORCE :0.5-2.0Kgf(REF.)
   - 2-2. WITHDRAWAL FORCE :0.8-2.0Kgf(REF.)
3. LIFE TEST: 10,000 CYCLES.
4. TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

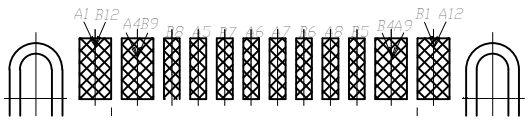



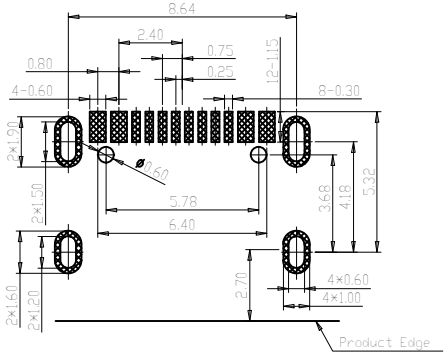

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

序号	品名	材质	电镀/颜色	备注
3	外壳	不锈钢	镀镍	
2	接触	铜	镀金	
1	基座	LCP	黑色	

深圳市虹成电子有限公司		品名 TITLE	TYPE-C母座	
		料号 PART NO	HC-TYPE-C-16P-026C	
GENERAL TOLERANCES (UNLESS SPECIFIED)	比列 SCALE	1:1		
X. ±0.5 X.° ±2°	单位 UNIT	MM	制图 DRAW	AhYe
X.X ±0.20 X.X°±1°	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
X.XX ±0.10 .XX°	版本 REV	A	批准 APPROVE	赵亮亮

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-PM254-8.5H-2x20PS HC-PZ254-13.8L-1x6PWA HCZZ0032-6 HCZZ0514-6 HC-FPC-0.5-24P-FH20 HC-FPC-0.5-40P-FH20 HC-PM254-5.0H-2x10PZ HC-PZ254-11.5L-1x20PZ HC-USB3.0-C34-P HCZZ0001-6 HC-PZ254-11.5L-1x10PZ HC-FPC-0.5-10P-FH20 HC-PM200-4.3H-2x20PZ HC-PZ127-7.2L-2x3PS HC-PM254-8.5H-1x21PZ HCZZ0001-2 HC-USB2.0-L100-093P HCZZ0451-4 HCZZ0451-6 HCZZ0576-5 HC-FPC-0.5-6P-CSH20 HC-PHB2.0-2x4AW HC-PM200-4.3H-2x8PS HC-USB3.0-L175-2X1-J HC-USB3.0-L257-J HCZZ0530-4 HC-FPC-0.5-50P-FHH20 HC-PHB2.0-2x5A HC-PZ254-11.5L-2x18PZ HC-USB3.0-C26