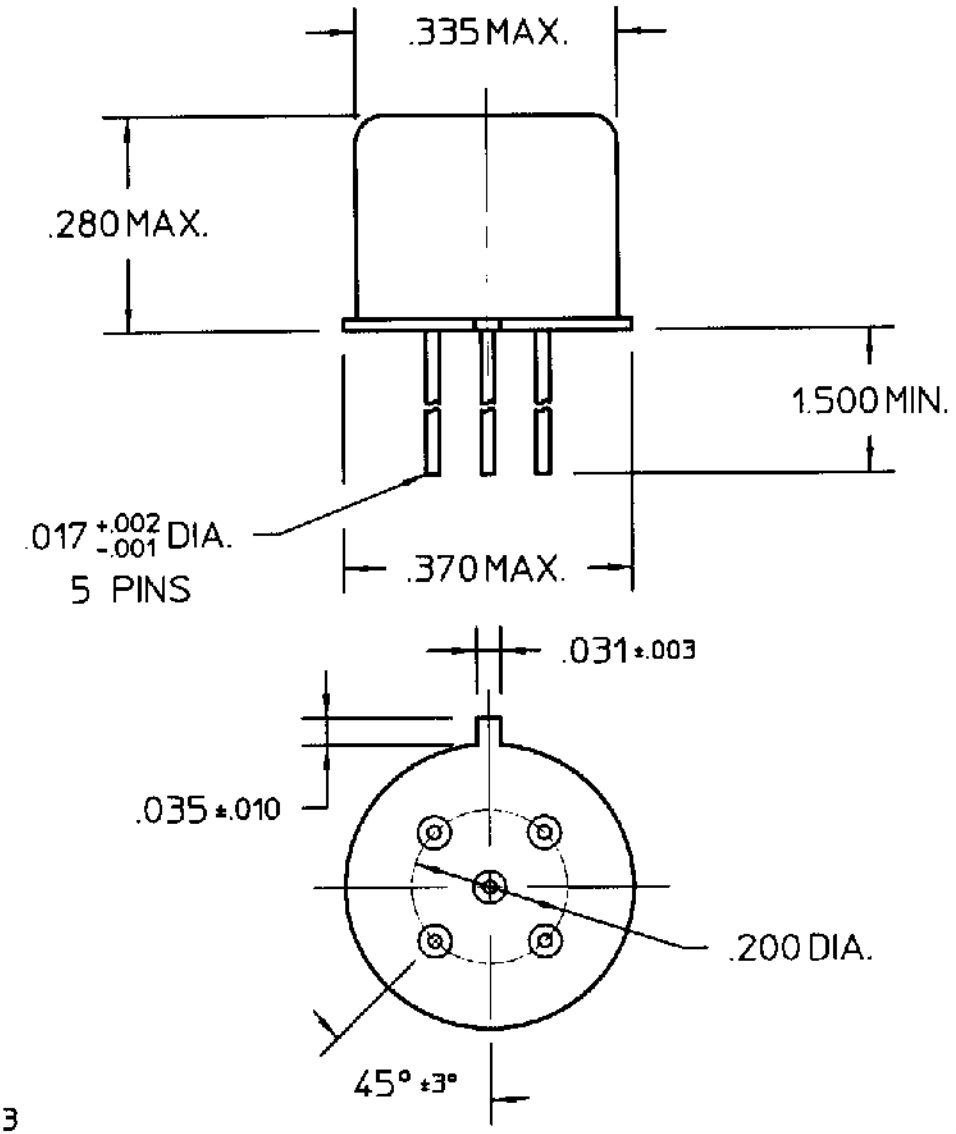



REV. 0

DCO 141423

COIL: @ 25°C

RESISTANCE 500 OHMS ±10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 7.0 VDC

MUST RELEASE 4.0 VDC MAX, 0.63 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.

RELEASE TIME 2.0 MS MAX.


CONTACT BOUNCE 1.5 MS MAX.

CUST. QPL

CUST. NO. M39016/7-019L REV.

"J1MA" RELAY

# CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 10/6/99 CK [illegible] 10/6/99

COMMUNICATIONS INSTRUMENTS, INC.

# J1MAW-12XL

E-718 REV. 2

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## TE Connectivity:

SMW73R0JT U5254-000005-030PA 3-1393225-0 SBCHE154R7K TE50BR39J 1393431-1 141991-2 1743455-2 CPF0402B37K4E1 175977-2 2834055-1 3631B101LL 936348-1 CRGCQ2010J3K3 SBCHE64R7K 1-962915-1 1903112-2 1969656-1 2-292161-3 MPT100C18RF ROX05SJ18R 2310537-1 2377783-2 650075-000 2005330-1 917696-1 RH73H2A40MKTN 1-794222-0 2380312-2 3430B2F51RTDF