
Rocker Switch | **SRB2-1A-DC-1-RNL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

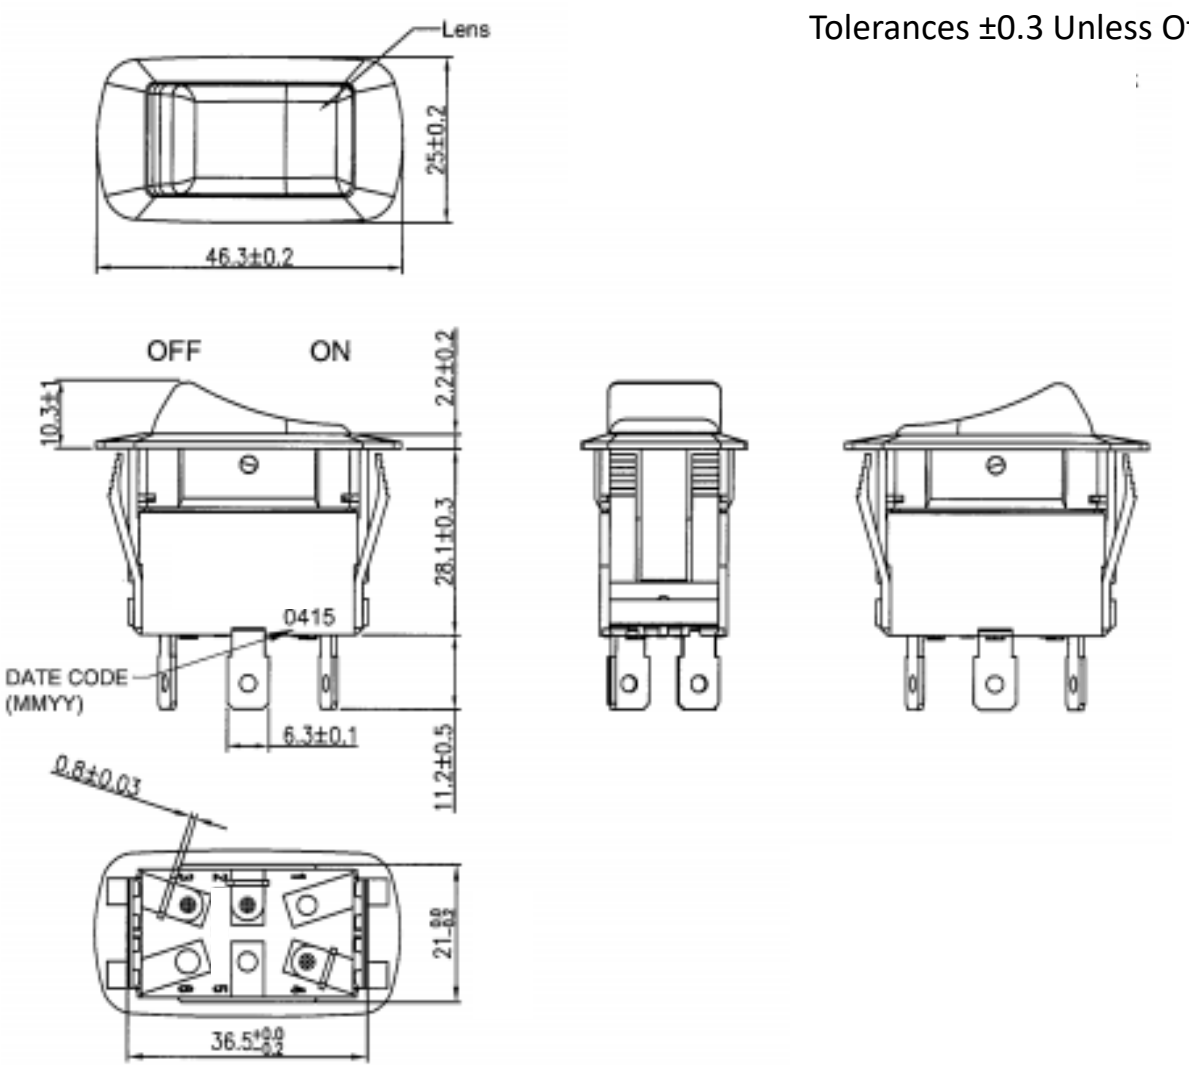


Mounting Hole

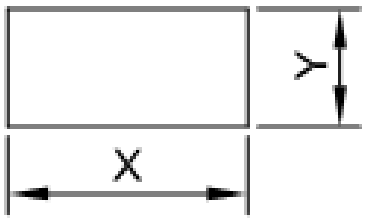

Thickness	X	Y
0.75~1.25	21.2+0.1	36.6+0.2
1.25~2.0	21.2+0.1	36.8+0.2
2.0~3.0	21.2+0.1	37.0+0.2

Circuit Diagram

3P SPST OFF-ON (Bulb-D)



Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66+33%GF
Lens	Red clear, PC
Lamp	Red (Bulb Dependent)
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SRD2-2F-DC-1-RNN TA1-1A-DC-4 SRD2-1G-DC-1-BNN TE3-1A-DC-1-AL TC6-P1-Z TE1-1F-DC-1-PB SB-1B-DC-3-B SB-1B-DC-3-R SRA1-1A-DC-1-NN-2 SRC1-1B-DC-1-B SRD2-2F-DC-1-BNN PB-1A-DC-2-B PD-1E-DC-9-UL RC-1A-DC-1-AL RD2-1A-DC-1-AL TA2-1A-DC-5 TB1-2H-DC-6 PB-1A-DC-2-RDL SRB1-1G-DC-1-NN RF3-1A-DC-2-GL SC-B SRA1-2F-DC-1-NN SRD1-2A-DC-1-BGN TA2-1G-DC-6-O WR1 PB-1B-DC-2-RIL RA4-2A-DC-2-AL TE6-1A-DC-1-UL RF1-1A-DC-2-B-3 RG3-1A-DC-1-B