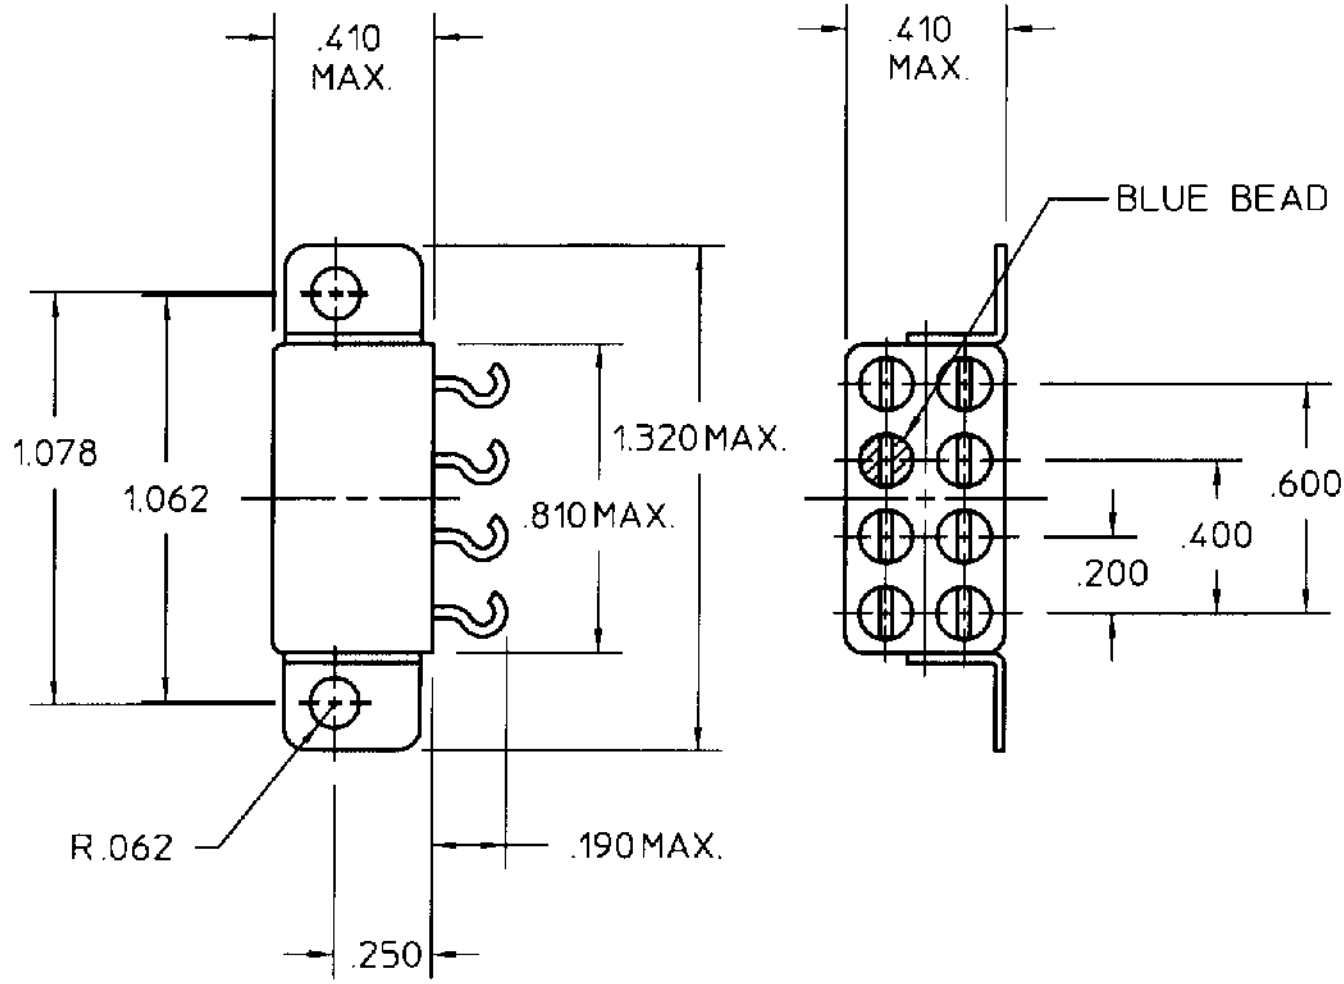


REV. 1 10/4/96

COIL: @ 25°C

RESISTANCE	47 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.2 VDC
MUST RELEASE	0.21 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2500 CPS @ 20 g's

SHOCK 50 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX.
RELEASE TIME 5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

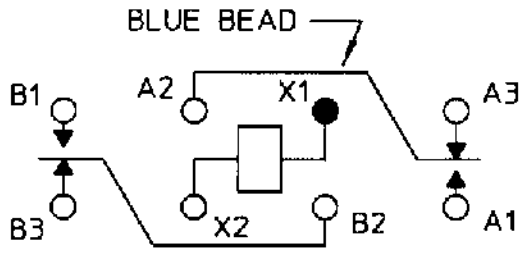

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/2/91 CK 10/4/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/44-004M

TYPE "HMS" RELAY

HMS1131S01M

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1969656-1 917696-1 CRGCQ2010J3K3 MPT100C18RF U5254-000005-030PA 2834055-1 2310537-1
3631B101LL 1393431-1 175977-2 1903112-2 SBCHE64R7K TE50BR39J 2-292161-3 2377783-2
2380312-2 3430B2F51RTDF 936348-1 CPF0402B37K4E1 1-794222-0 141991-2 1743455-2 3-1393225-0
650075-000 RH73H2A40MKTN ROX05SJ18R SBCHE154R7K 1-962915-1 2005330-1 SMW73R0JT