
CPDQC3V3R-HF

BIDIRECTIONAL TVS DIODE


Features

- Protects one data line
- Ultra low leakage: nA level
- Operating voltage: 3.3V
- Ultra low clamping voltage
- Complies with following standards:
  - – IEC 61000-4-2 (ESD) immunity test
    - Air discharge: ±30kV
    - Contact discharge: ±30kV
  - – IEC61000-4-5 (Lightning) 8A (8/20μs)
- RoHS Compliant

Dimensions DFN1006



Pin Configuration



Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players
- Keypads, Side Keys, LCD Displays

Mechanical Characteristics

- Package: DFN1006
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel:10,000pcs
- Reel Size:7 inch
- Device Marking: B


Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppp	80	W
ESD per IEC 61000−4−2 (Air)	V_{ESD}	±30	Kv
ESD per IEC 61000−4−2 (Contact)		±30	
Operating Temperature Range	T_J	-55 to +125	℃
Storage Temperature Range	T_{STJ}	-55 to +150	℃


Electrical Characteristics(TA=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				3.3	V
Breakdown Voltage	V_{BR}	I_T = 1mA	3.5			V
Reverse Leakage Current	I_R	V_{RWM} = 3.3V			0.5	μA
Clamping Voltage	V_C	I_{PP} = 1A (8 x 20 μs pulse)		6.5		V
Clamping Voltage	V_C	I_{PP} = 8A (8 x 20 μs pulse)			10	V
Junction Capacitance	C_J	V_R = 0V, f = 1MHz		12		pF


Typical Performance Characteristics (T_A=25°C unless otherwise Specified)

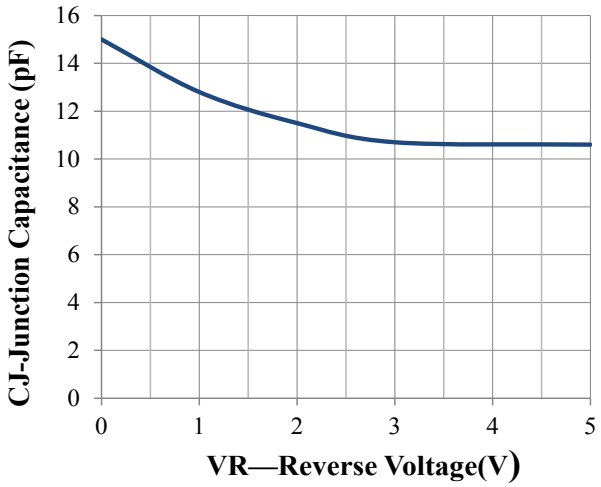


Junction Capacitance vs. Reverse Voltage

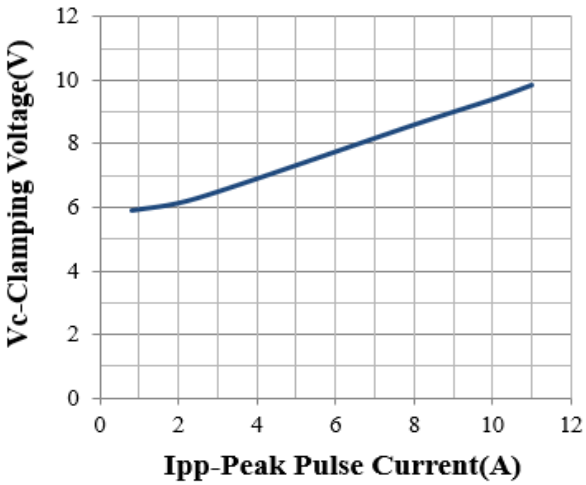


Clamping Voltage vs. Peak Pulse Current

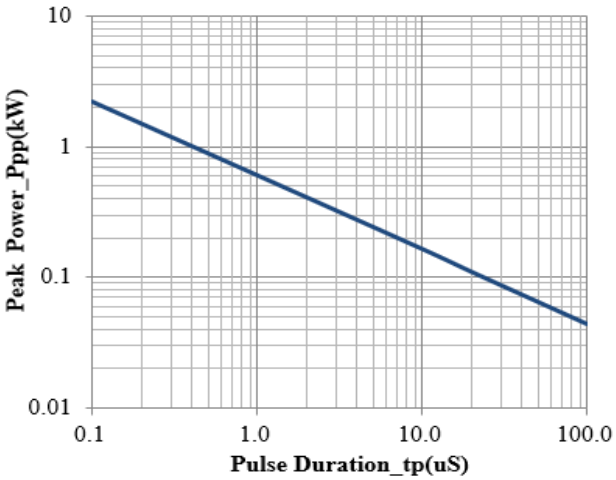


Peak Pulse Power vs. Pulse Time

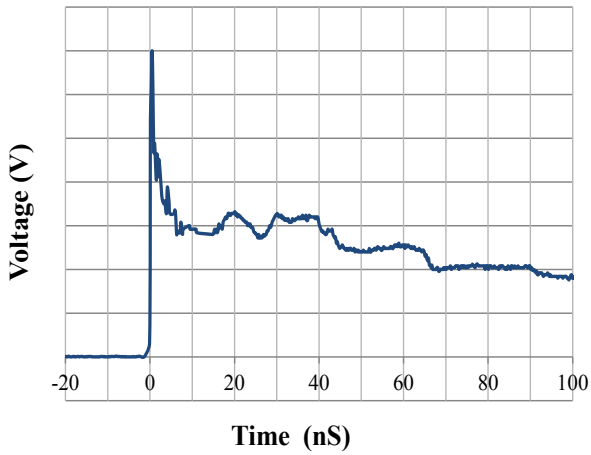

IEC61000−4−2 Pulse Waveform

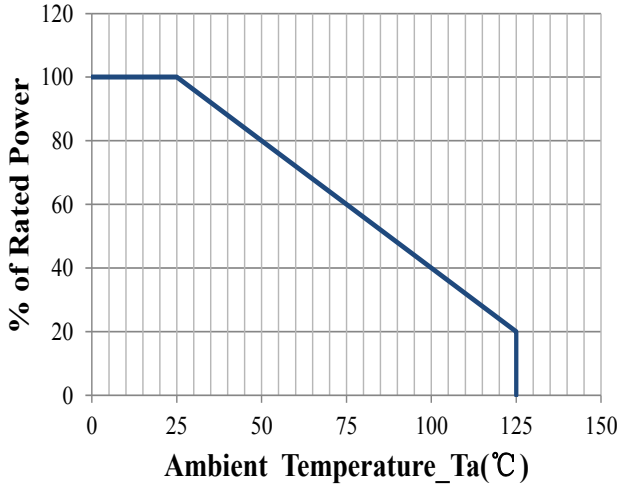


Power Derating Curve

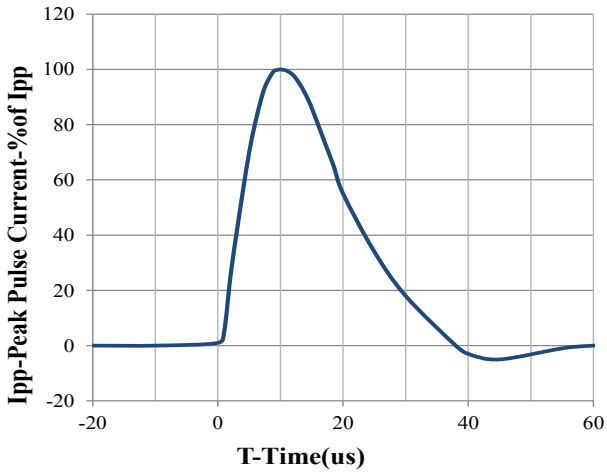


8 X 20us Pulse Waveform

DFN1006 (0402)Package Outline Drawing

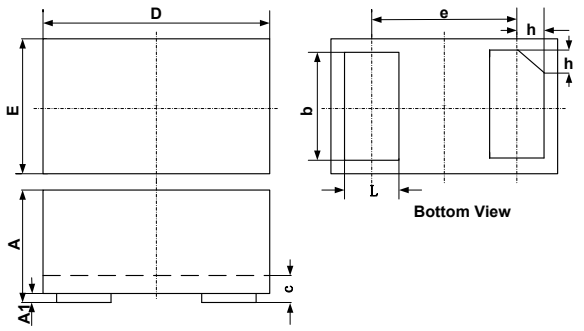

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.45	0.50	0.55	0.018	0.020	0.022
c	0.12	0.15	0.18	0.005	0.006	0.007
D	0.95	1.00	1.08	0.037	0.039	0.041
e	0.65 BSC			0.026 BSC		
E	0.55	0.60	0.68	0.022	0.024	0.026
L	0.20	0.25	0.30	0.008	0.010	0.012
h	0.07	0.12	0.17	0.003	0.005	0.007

Suggested Land Pattern

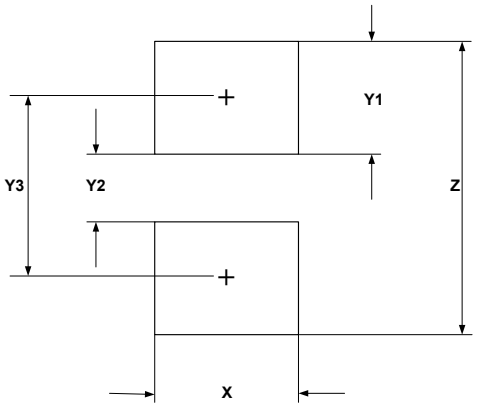

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	0.60	0.024
Y1	0.50	0.020
Y2	0.30	0.012
Y3	0.80	0.032
Z	1.30	0.052

Shanghai Leiditech Electronic Co.,Ltd
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Leiditech:

5KP9.0A HY05U-523 L35L5V0CB2 LC24CI NVTR4502P SM8S26A ULC0524BLC 1.5KE9.1CA 5.0SMDJ110CA LC0534N CM1213-08MR LMTL5P02 PESD36VS2UT SMS24C TPAOZ8804ADI P4SMFJ24CA PS03CBUL2 S3301TE SE10F10B3.3A TPD1E1B04DPYR-TP P4KE120A P4KE130A SD33CW SDA1211CDN ULC0521C 1.5KE510A P4KE170CA P4KE43CA P4KE480CA STL45N10F7AG