
| REV. | DATE | DESCRIPTION |
|---|---|---|
| NC | 03/02/00 | INITIAL RELEASE |
| A | 11/13/06 | UPDATE DRAWING FORMAT |

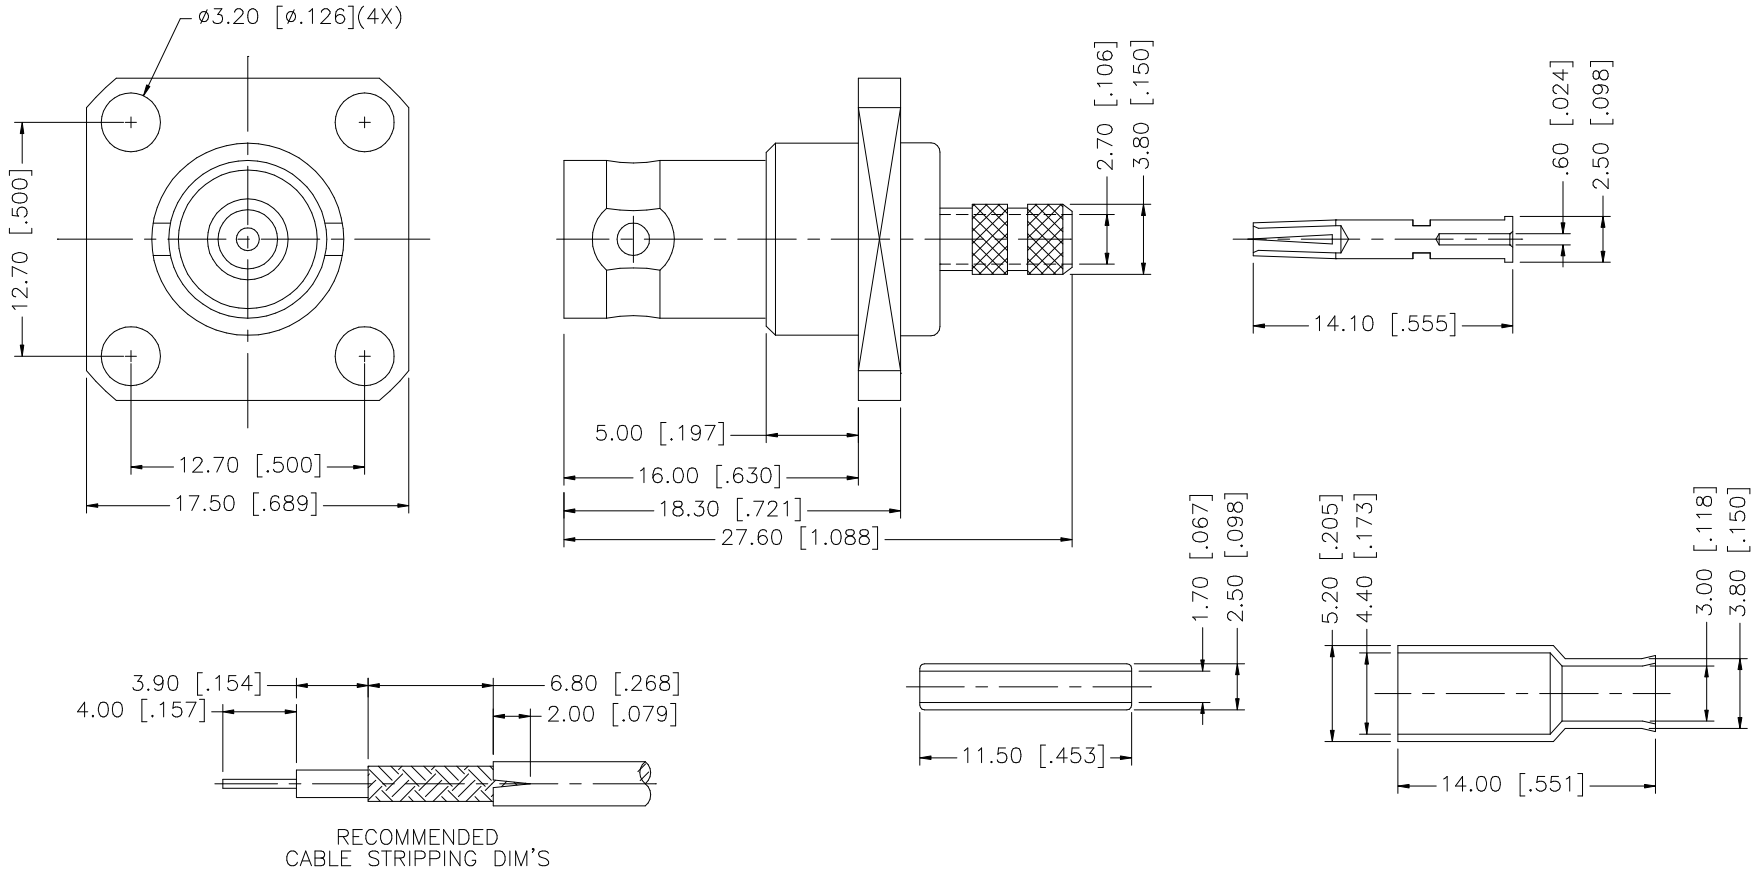


RECOMMENDED
CABLE STRIPPING DIM'S

| | DESCRIPTION | MATERIAL | FINISH | QTY |
|---|---|---|---|---|
| 8 | | | | |
| 7 | | | | |
| 6 | | | | |
| 5 | FERRULE | BRASS | NICKEL | 1 |
| 4 | SLEEVE | DELRIN | NATURAL | 1 |
| 3 | CONTACT PIN | BER. COPPER | GOLD | 1 |
| 2 | INSULATOR | TEFLON | NATURAL | 1 |
| 1 | BODY | BRASS | NICKEL | 1 |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS | DATE |
|---|---|
| DRAWN G.R.S. | 11/13/06 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |

CAD FILE C:/112/112288.DWG

Amphenol Connex

PART DESCRIPTION
BNC PANEL CRIMP JACK
(FOR RG-174/U, 188A, 316/U CABLE)

PART NO. 112288

| DWG. NO. | REV. | SIZE | SCALE |
|---|---|---|---|
| 112288.DWG | A | A | NA |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Amphenol:

68001-200HLF 68002116HLF 86093967896755LF 86093968813H45V1LF 95157-140LF 67996-204HLF 86093488314745V1LF CD15S13E4RV09LF 91614-403ALF DCMF37P DEM09P032N 70430-164LF DAPO15S365TLF 70218-1116LF 86130202123355E1LF D15P13A6RV12LF RJSBE5080C2 68000-236HLF 68001-108HLF 70234-112LF 86093968191755E3LF 54202-S08-07LF 65781-158 69192-408HLF 76384-316LF 54202-G0805CLF 863013A LD15P33E4GV00LF LD25S33E4GV00LF RJE061661210