
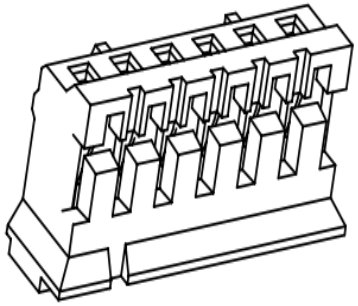
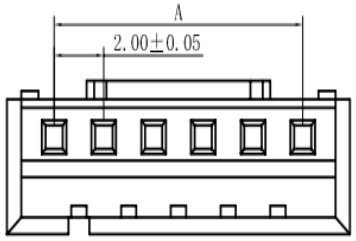


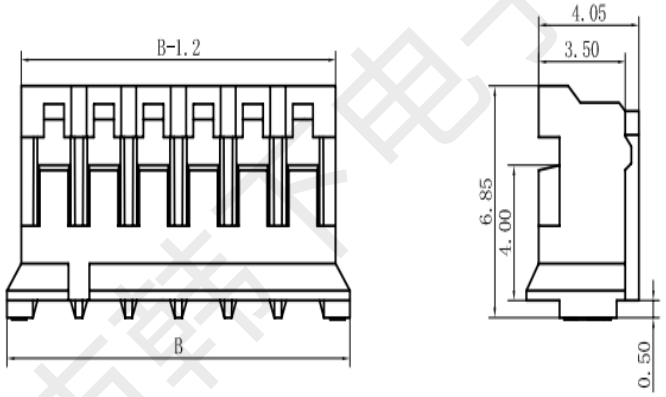


1. 极数 poles: 2 to 20P
2. 额定电流 Current rating: 2.0A AC, DC
3. 额定电压 Voltage rating: 250V AC, DC
4. 温度范围 Temperature range: -25。C to +85。C
5. 接触电阻 Contact resistance: ≤20mΩ
6. 绝缘电阻 Insulation resistance: ≥1000mΩ
7. 耐电压 Withstand voltage: 800V AC/minute
8. 适用线规 Applicable Wire: AWG #32 to #24
9. 适用基板厚度 Applicable PC board thickness: 1.6mm

- **材料 Material:Nylon66 UL 94V-0**

| Poles | Part No | Dimensions mm | |
|---|---|---|---|
| | | A | B |
| 2 | PH-2Y | 2.00 | 5.80 |
| 3 | PH-3Y | 4.00 | 7.80 |
| 4 | PH-4Y | 6.00 | 9.80 |
| 5 | PH-5Y | 8.00 | 11.80 |
| 6 | PH-6Y | 10.00 | 13.80 |
| 7 | PH-7Y | 12.00 | 15.80 |
| 8 | PH-8Y | 14.00 | 17.80 |
| 9 | PH-9Y | 16.00 | 19.80 |
| 10 | PH-10Y | 18.00 | 21.80 |
| 11 | PH-11Y | 20.00 | 23.80 |
| 12 | PH-12Y | 22.00 | 25.80 |
| 13 | PH-13Y | 24.00 | 27.80 |
| 14 | PH-14Y | 26.00 | 29.80 |
| 15 | PH-15Y | 28.00 | 31.80 |
| 16 | PH-16Y | 30.00 | 33.80 |
| -- — | — — | — — | -- — |

| GENERL TOLERANCE | | 制 图 DRAWING | 黄彬 | 料 号 PART NO. | HX PH2.0-2Y | 版 本 REV. | A |
|---|---|---|---|---|---|---|---|
| X.±0.25 | X.°±2° | 审 核 CHECK | 张伟 | 品 名 TITLE | 压线端子胶壳 | 页 次 SHEET | 1/1 |
| .X±0.20 | .X°±1° | | | 客户料号 CUTM. NO. | | | |
| .XX±0.15 | .XX°±0.5° | 核 准 APPRONAL | 罗小春 | | | | |
| .XXX±0.10 | .XXX°±0.5° | 单 位 UNITS | MM | 比 例 SCALE | 1:1 | 韩下 HANXIA 深圳市韩下电子有限公司 | |

深圳市韩下电子有限公司

深圳市韩下电子有限公司
Shenzhen Hanxia Electronic Co., Ltd
Tel: 0755-23086569

# 承　认　书

# SPECIFICATION FOR APPROVAL

**产 品 编 码**
**Material code:** _____

产品名称 Project：线对板胶壳

规格型号 Part No：HX PH2.0-2Y

**贵公司承认印 Approal slgnatures**

| 料 号/Part No. | 签　章/Signatures |
|---|---|
| | |

日期 Date:

| | | |
|---|---|---|
| 拟制/Drawn | 黄彬 | 深圳市韩下电子有限公司 工程专用章 |
| 审核/Check | 张伟 | |
| 批准/Approved | 罗小春 | |

深圳市韩下电子有限公司