



REV.	DATE	ECR NO.	DESCRIPTION
A	04/05/03	–	UPDATE DRAWING FORMAT
B	08/04/08	–	REVISE PART DESCRIPTION FROM "JACK" TO "PLUG"

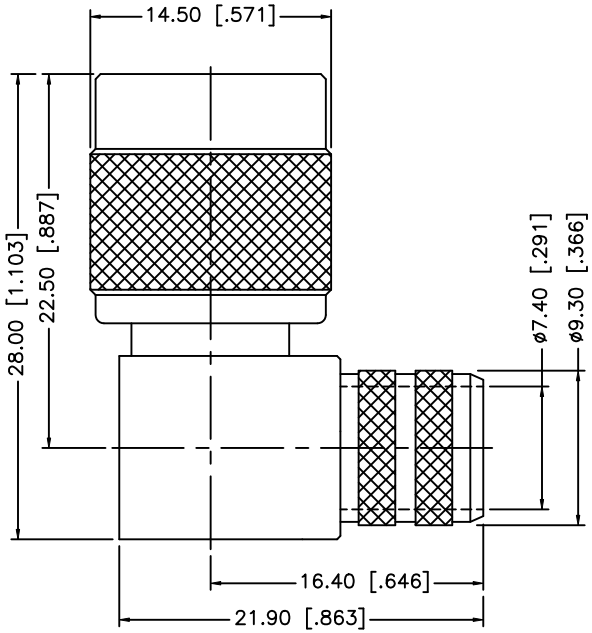

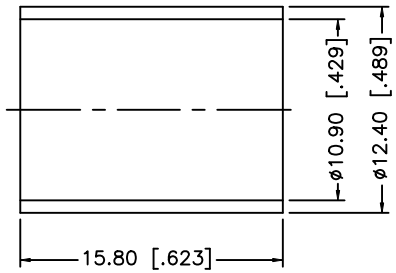

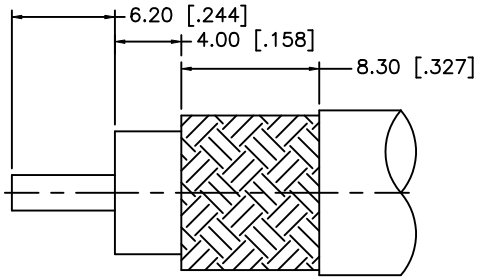

RECOMMENDED
CABLE STRIPPING DIM'S



	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6	COVER	BRASS	NICKEL	1
5	FERRULE	COPPER	NICKEL	1
4	GASKET	RUBBER	RED	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	HOUSING/BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	08/04/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122416.DWG

Amphenol Connex

PART DESCRIPTION
TNC R/A CRIMP PLUG – LMR 400 CABLE
(FOR BELDEN 9913, 9914)

PART NO. 122416

DWG. NO.	REV.	SIZE	SCALE
122416.DWG	B	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

86093967896755LF 86093968191755E3LF 95157-140LF LD25S33E4GV00LF 54202-S08-07LF 68002116HLF 863013A RJSBE5080C2 68001-108HLF CD15S13E4RV09LF DAPO15S365TLF LD15P33E4GV00LF 65781-158 67996-204HLF 86093968813H45V1LF D15P13A6RV12LF 86093488314745V1LF 86130202123355E1LF 91614-403ALF 68000-236HLF 70234-112LF DEM09P032N 68001-200HLF 70218-1116LF 70430-164LF DCMF37P RJE061661210 54202-G0805CLF 69192-408HLF 76384-316LF