



ROHS

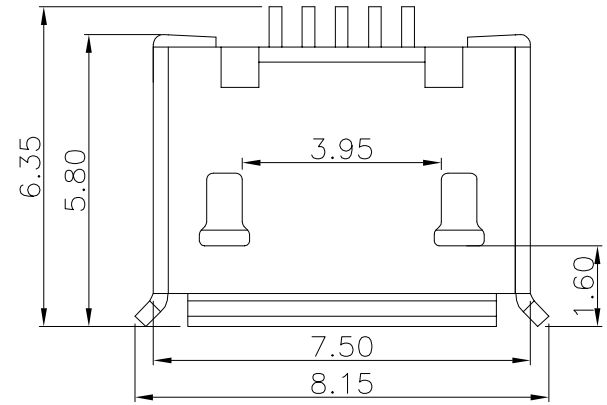

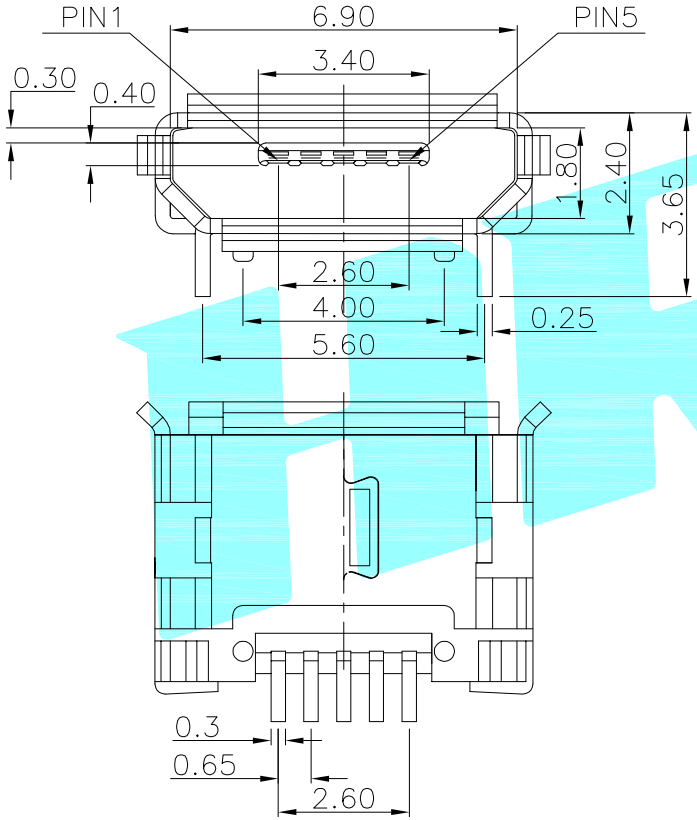



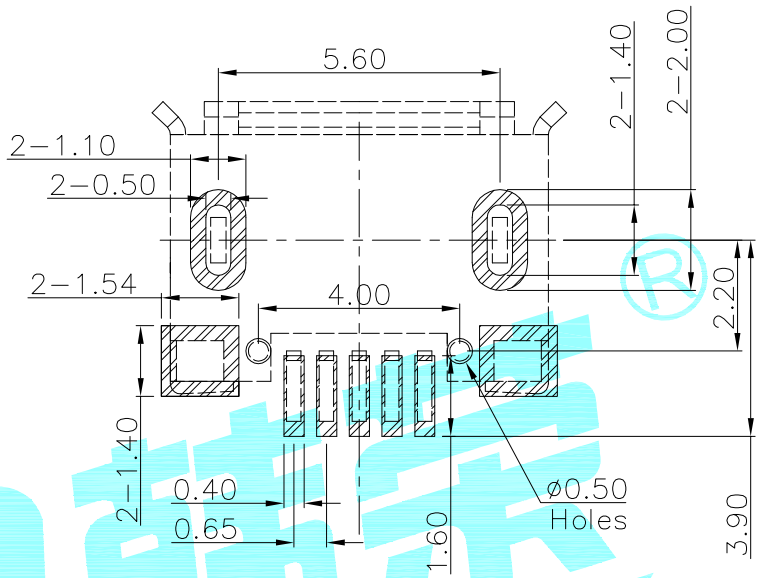

Recommended PCB Layout

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 10,000 CYCLES.
3.PACKAGING: 1000PCS/REEL

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	Phosphor Bronze	Sn Plated	——
②	Contact	——	5	Phosphor Bronze	Au Plated	——
①	Housing	——	1	LCP	Black	——

APPROVALS		DATE	HRO韩硕® ELECTRONICS CO.,LTD		
DRAWN	JKUN.LU	2014/9/29			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.	U-F-M5DS-Y-2	
TOLERANCES ARE	30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~ 5 ±0.15	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ:
			DRAWING NO.	——	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K8-5851D-L1 PJ-3250-5A U-C-M5DW-W-1 U-F-M5DD-Y-L U-F-M5DD-Y-L1 K2-1101DF-A4DW-01
K2-1102SP-A5SC-04 K2-1818DP-A3SW-01 K3-1346S-F1 TYPE-C-31-M-04 DS-01BP ES-07KP
K2-1102BG-I4CW-01 K2-1102DP-G4SW-04 U-F-M5DS-Y-1 U-F-M5SS-W-5 K2-1102AT-A4CW-01
K2-1102SP-K4SC-04 U-C-M5SS-Y-1 DQ-03BP K3-2258S-E1 PJ-399B-6A U-M-M5DD-W-2
K2-1102DP-S3SW-04 DC-031A-10A SIM-08A SS-22D03-G4 U-F-M5DD-W-L DA-10RP K5-1617SA-01