
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR-16-001902	22MAR2016	BW	JP

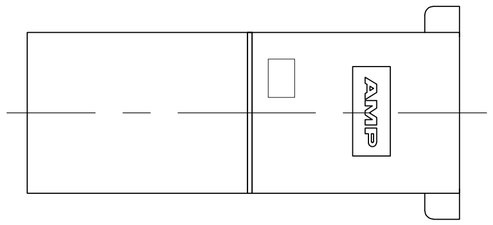



1 ACCEPTS RECEPTACLE CONTACTS 1217378(#18–#22 AWG SINGLE WIRE), 1217094(#18–#14 AWG SINGLE WIRE) AND 1217095 (TWO #18'S OR TWO #16'S OR A #16 + #18 COMBINATION).

2 FRONT AND BACK VIEWS SHOW ONLY THE GRIPPERS. FOR KEYING AND POLARIZATION FEATURES, SEE SPECIAL FRONT VIEW.

3 TAB SHOULDER SLOTS OPTIONAL ON BOTH SIDES OF DUMMY CIRCUITS.

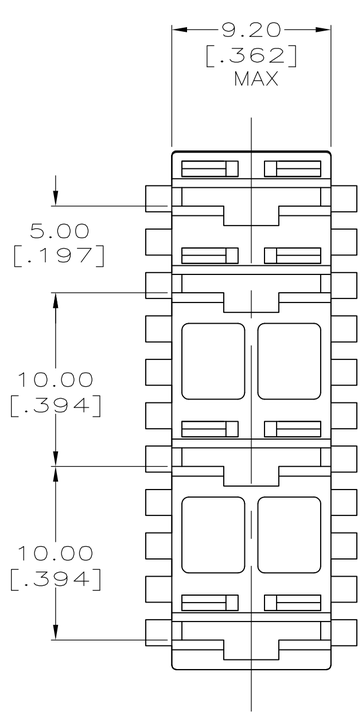

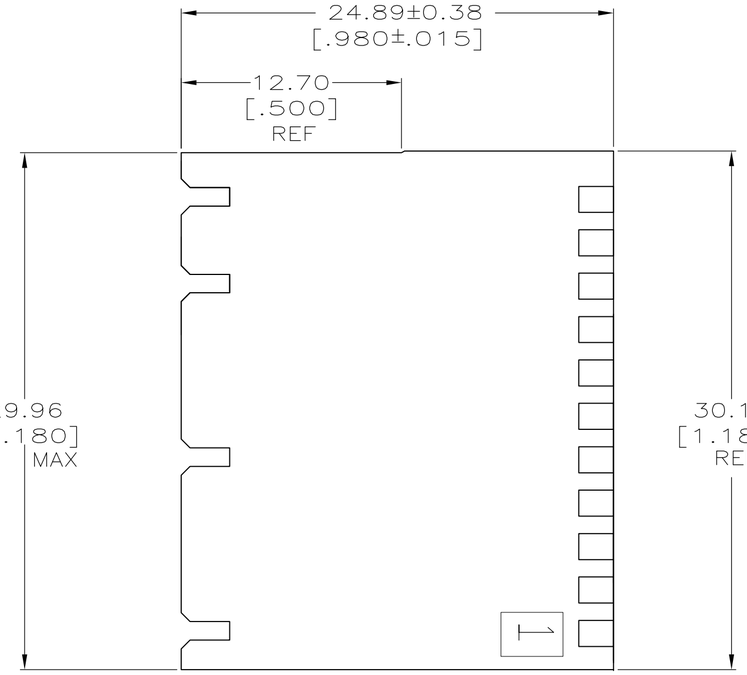

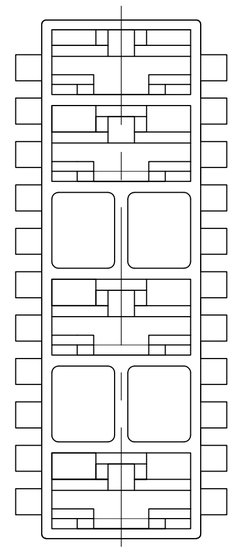

BLUE	NONE	NONE	521435–1
FINISH/COLOR	KEYING FEATURE	POLARIZATION FEATURES	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25 [.010]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: NYLON

FINISH: SEE TABLE

DWN	JR RUTH	18OCT01
CHK	N DEIBERT	18OCT01
APVD	N DEIBERT	18OCT01
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT		

TE Connectivity

NAME: HOUSING, RECEPT, POSITIVE–LOCK, MKIII, 6.35 [.250] SERIES, 6 POSITION/4CIRCUIT
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-521435	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV D

521435

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1743455-2 175977-2 2834055-1 1393431-1 2-292161-3 2005330-1 2310537-1 650075-000 MPT100C18RF SBCHE64R7K U5254-000005-030PA 3-1393225-0 RH73H2A40MKTN ROX05SJ18R SMW73R0JT 1-794222-0 1903112-2 2377783-2 2380312-2 CRGCQ2010J3K3 1969656-1 3430B2F51RTDF SBCHE154R7K TE50BR39J 3631B101LL 917696-1 936348-1 CPF0402B37K4E1 1-962915-1 141991-2