40V N-Channel MOSFET

General Description

The 150N04 uses advanced trench technology to provide excellent $R_{DS(ON)}$.This is suitable device for high current switching applications.

Product Summary

BVDSS	$R_{DS(on)}$ max.	ID
40V	3.2mΩ	120A


Applications

- Motor Control
- DC-DC converters
- Switching applications

Features

- Low On-Resistance
- 100% avalanche tested
- RoHS Compliant

TO-220/ 263 Pin Configuration

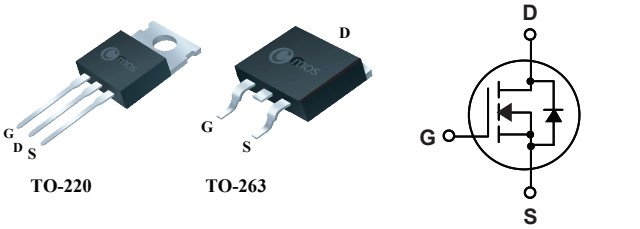

Type	Package	Marking
CMP150N04	TO-220	CMP150N04
CMB150N04	TO-263	CMB150N04

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_C=25℃	Continuous Drain Current	120	A
I_D@T_C=100℃	Continuous Drain Current	95	A
I_{DM}	Pulsed Drain Current	480	A
EAS	Single Pulse Avalanche Energy[1]	648	mJ
P_D@T_C=25℃	Total Power Dissipation	300	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient	---	62.5	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-case	---	0.42	℃/W

Electrical Characteristics (T_J=25℃ , unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=250uA	40	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V , I_D=20A	---	---	3.2	mΩ
		V_{GS}=4.5V , I_D=20A	---	---	4.7	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =250uA	1	---	3	V
I_{DSS}	Drain-Source Leakage Current	V_{DS}=40 V, V_{GS}=0V	---	---	1	uA
I_{GSS}	Gate-Source Leakage Current	V_{GS} = ±20V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=10V , I_D=20A	---	30	---	S
R_g	Gate Resistance	V_{DS}=0V , V_{GS}=0V , f=1MHz	---	0.7	---	Ω
Q_g	Total Gate Charge	I_D=120A V_{DD}=20V V_{GS}=10V	---	76	---	nC
Q_{gs}	Gate-Source Charge		---	24	---	
Q_{gd}	Gate-Drain Charge		---	18	---	
$T_{d(on)}$	Turn-On Delay Time	V_{DD}=20V R_{GEN}=4.7Ω I_D=60A V_{GS}=10V	---	20	---	ns
T_r	Rise Time		---	181	---	
$T_{d(off)}$	Turn-Off Delay Time		---	91	---	
T_f	Fall Time		---	66	---	
C_{iss}	Input Capacitance	V_{DS}=25V , V_{GS}=0V , f=1MHz	---	6400	---	pF
C_{oss}	Output Capacitance		---	450	---	
C_{rss}	Reverse Transfer Capacitance		---	360	---	

Diode Characteristics


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	V_G=V_D=0V , Force Current	---	---	120	A
I_{SM}	Pulsed Source Current		---	---	480	A
V_{SD}	Diode Forward Voltage	V_{GS}=0V , I_S=20A , T_J=25℃	---	---	1.2	V

Note :


1.The EAS data shows Max. rating .The test condition is V_{DS}=30V , V_{GS}=10V , L=1mH , I_{AS}=36A.

This product has been designed and qualified for the counsumer market.
Cmos assumes no liability for customers' product design or applications.
Cmos reserver the right to improve product design ,functions and reliability wihtout notice.Please refer to the latest version of specification.


Typical Characteristics

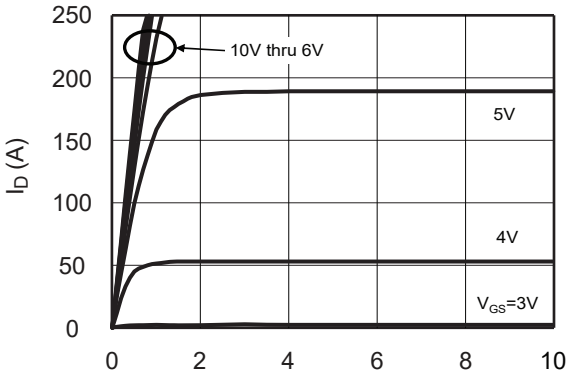


Output Characteristics

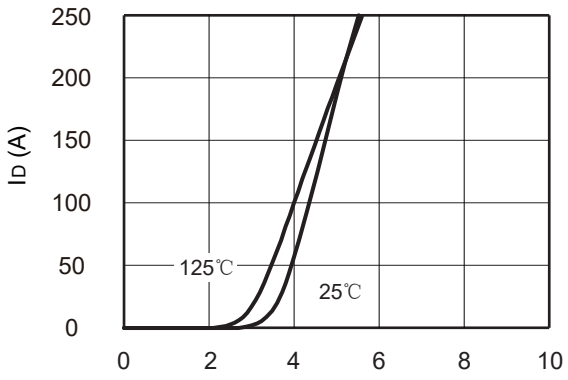


transfer characteristics

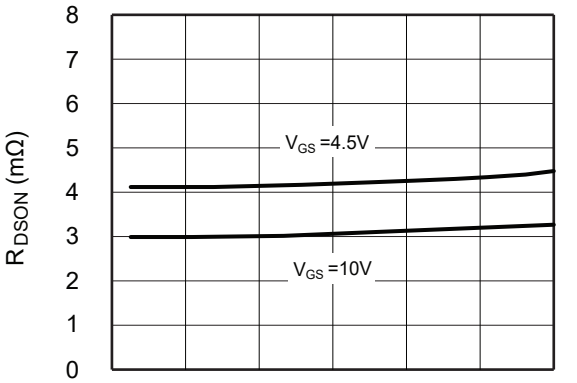


drain-source on-resistance

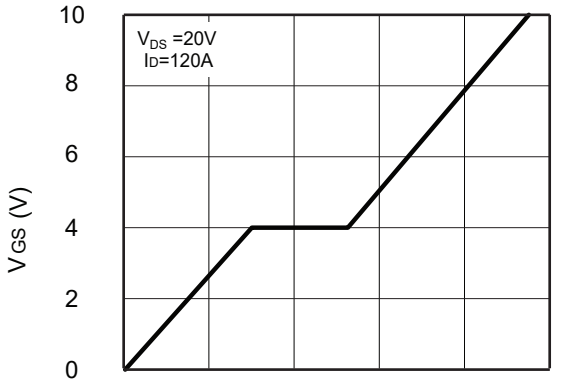

Gate charge vs gate-source voltage

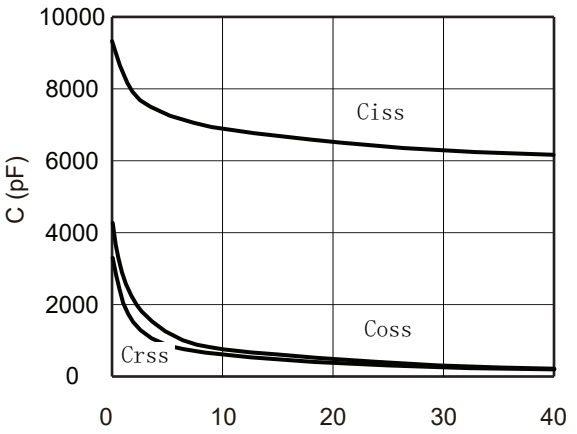


Capacitance Characteristics

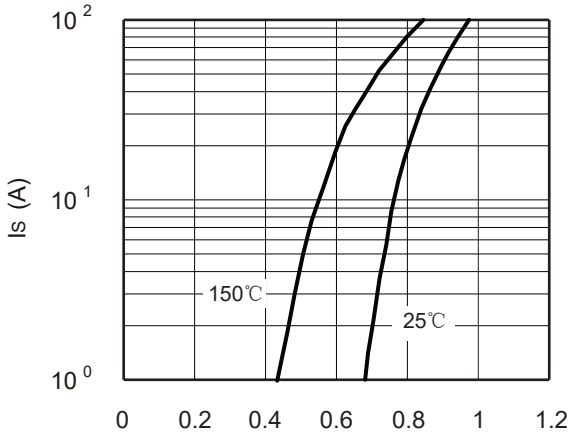

Body-Diode Characteristics

Package Dimension


TO-220 Unit :mm

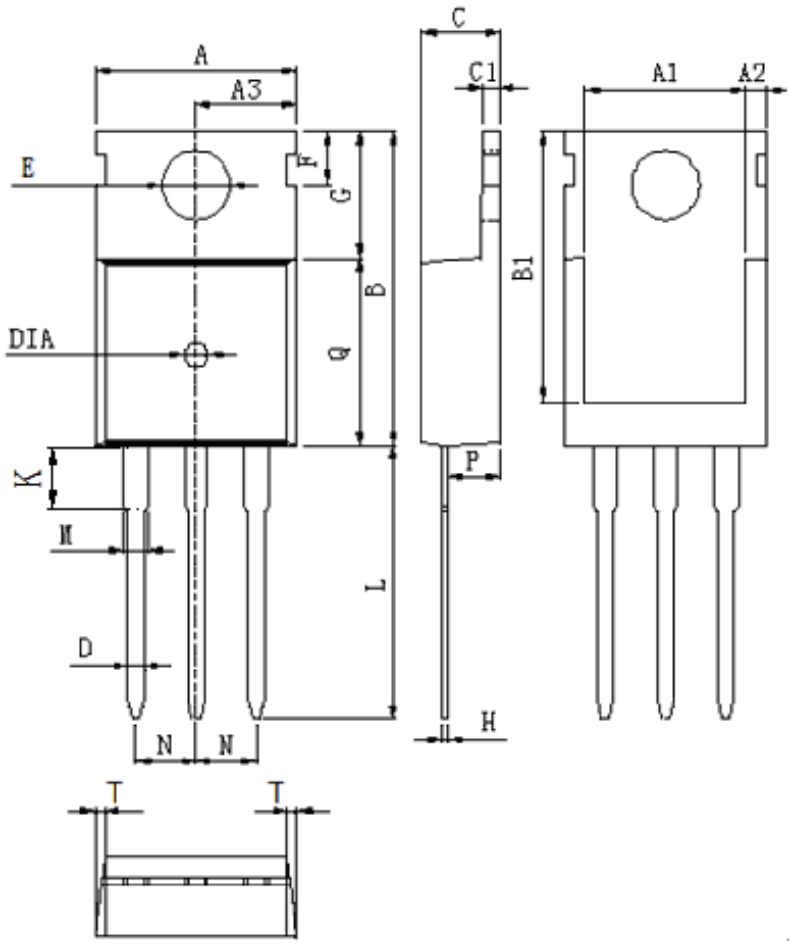

DIM	MILLIMETERS
A	10.0±0.3
A1	8.64±0.2
A2	1.15±0.1
A3	5.0±0.2
B	15.8±0.4
B1	13.2±0.3
C	4.56±0.1
C1	1.3±0.2
D	0.8±0.2
E	3.6±0.2
F	2.95±0.3
G	6.5±0.3
H	0.5±0.1
K	3.1±0.2
L	13.2±0.4
M	1.25±0.1
N	2.54±0.1
P	2.4±0.3
Q	9.0±0.3
T	W:0.35
DIA	⊙1.5(deep 0.2)

Package Dimension

TO-263 Unit :mm

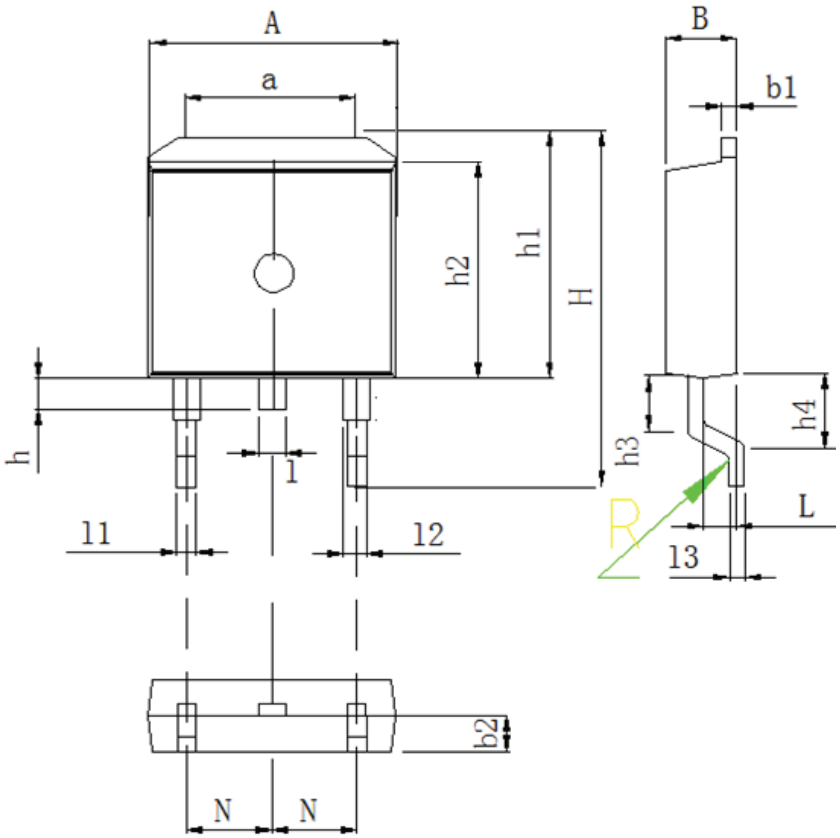

DIM	MILLIMETERS
A	9.8±0.2
a	7.4±0.4
B	4.5±0.2
b1	1.3±0.05
b2	2.4±0.2
H	15.5±0.3
h	1.54±0.2
h1	10.5±0.2
h2	9.2±0.1
h3	1.54±0.2
h4	2.7±0.2
L	2.4±0.2
l	1.3±0.1
l1	0.8±0.1
l2	1.3±0.1
l3	0.5±0.1
N	2.54±0.1
R	0.5R±0.05