

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

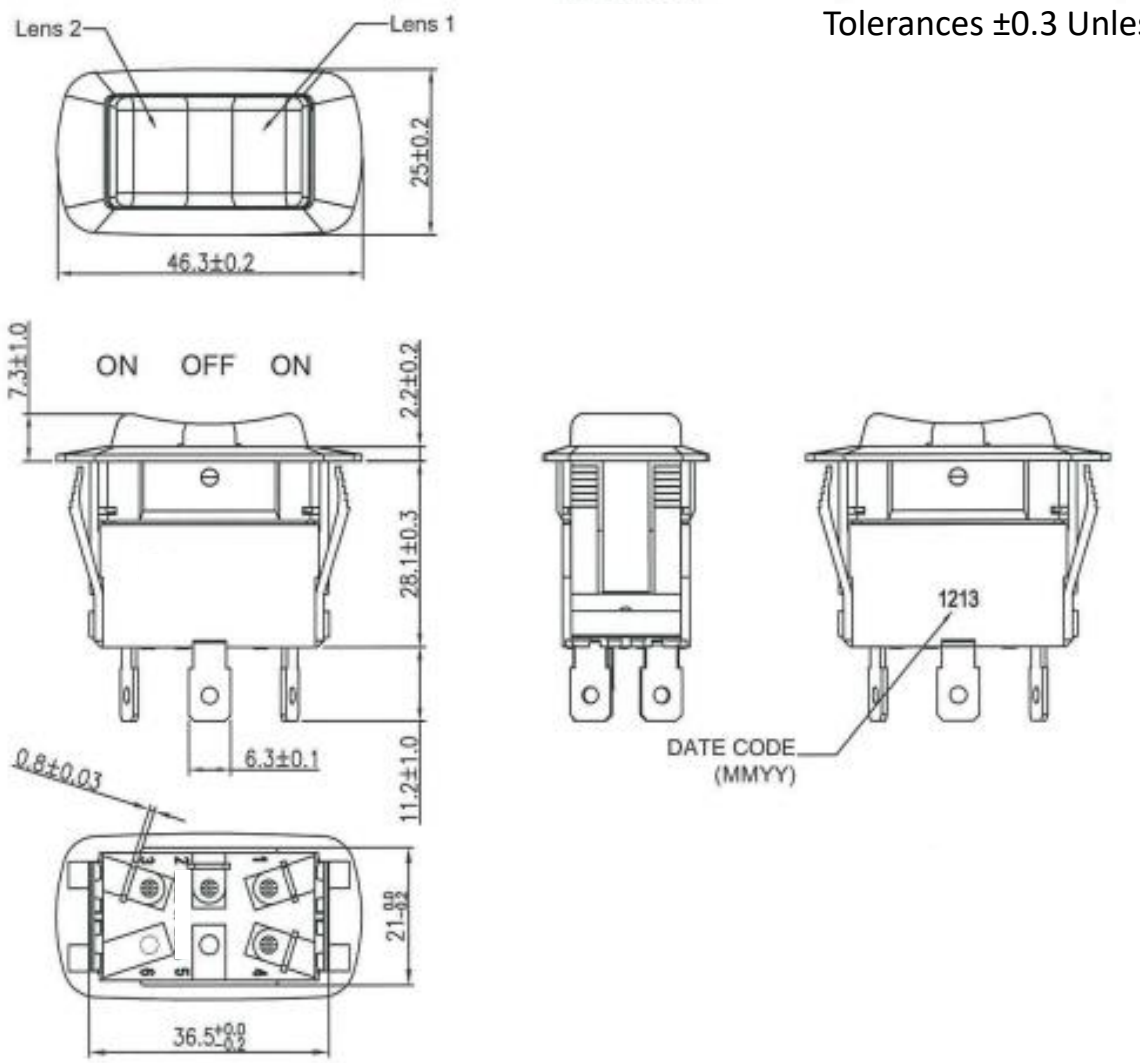


Mounting Hole

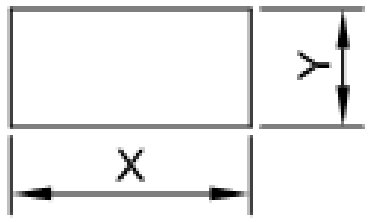

Thickness	X	Y
0.75~1.25	21.2+0.1	36.6+0.2
1.25~2.0	21.2+0.1	36.8+0.2
2.0~3.0	21.2+0.1	37.0+0.2

Circuit Diagram

4P SPDT ON-OFF-ON (LED-D)

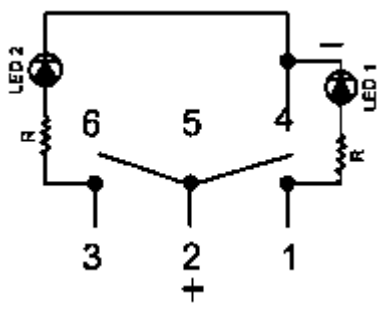

Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66+33%GF
Lens 1	Red, Super bright LED (Dep.)
Lens 2	Green, Super bright LED (Dep.)
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SRC1-1B-DC-1-B SRD2-1G-DC-1-BNN TA2-1A-DC-5 RF1-1A-DC-2-B-3 SB-1B-DC-3-R RC-1A-DC-1-AL SRA1-1A-DC-1-NN-2 SRD2-2F-DC-1-RNN TA1-1A-DC-4 TC6-P1-Z TE1-1F-DC-1-PB TE6-1A-DC-1-UL TA2-1G-DC-6-O TB1-2H-DC-6 PB-1A-DC-2-RDL PD-1E-DC-9-UL RG3-1A-DC-1-B SC-B PB-1A-DC-2-B RA4-2A-DC-2-AL SB-1B-DC-3-B SRA1-2F-DC-1-NN SRB1-1G-DC-1-NN WR1 PB-1B-DC-2-RIL RF3-1A-DC-2-GL SRD1-2A-DC-1-BGN SRD2-2F-DC-1-BNN TE3-1A-DC-1-AL RD2-1A-DC-1-AL