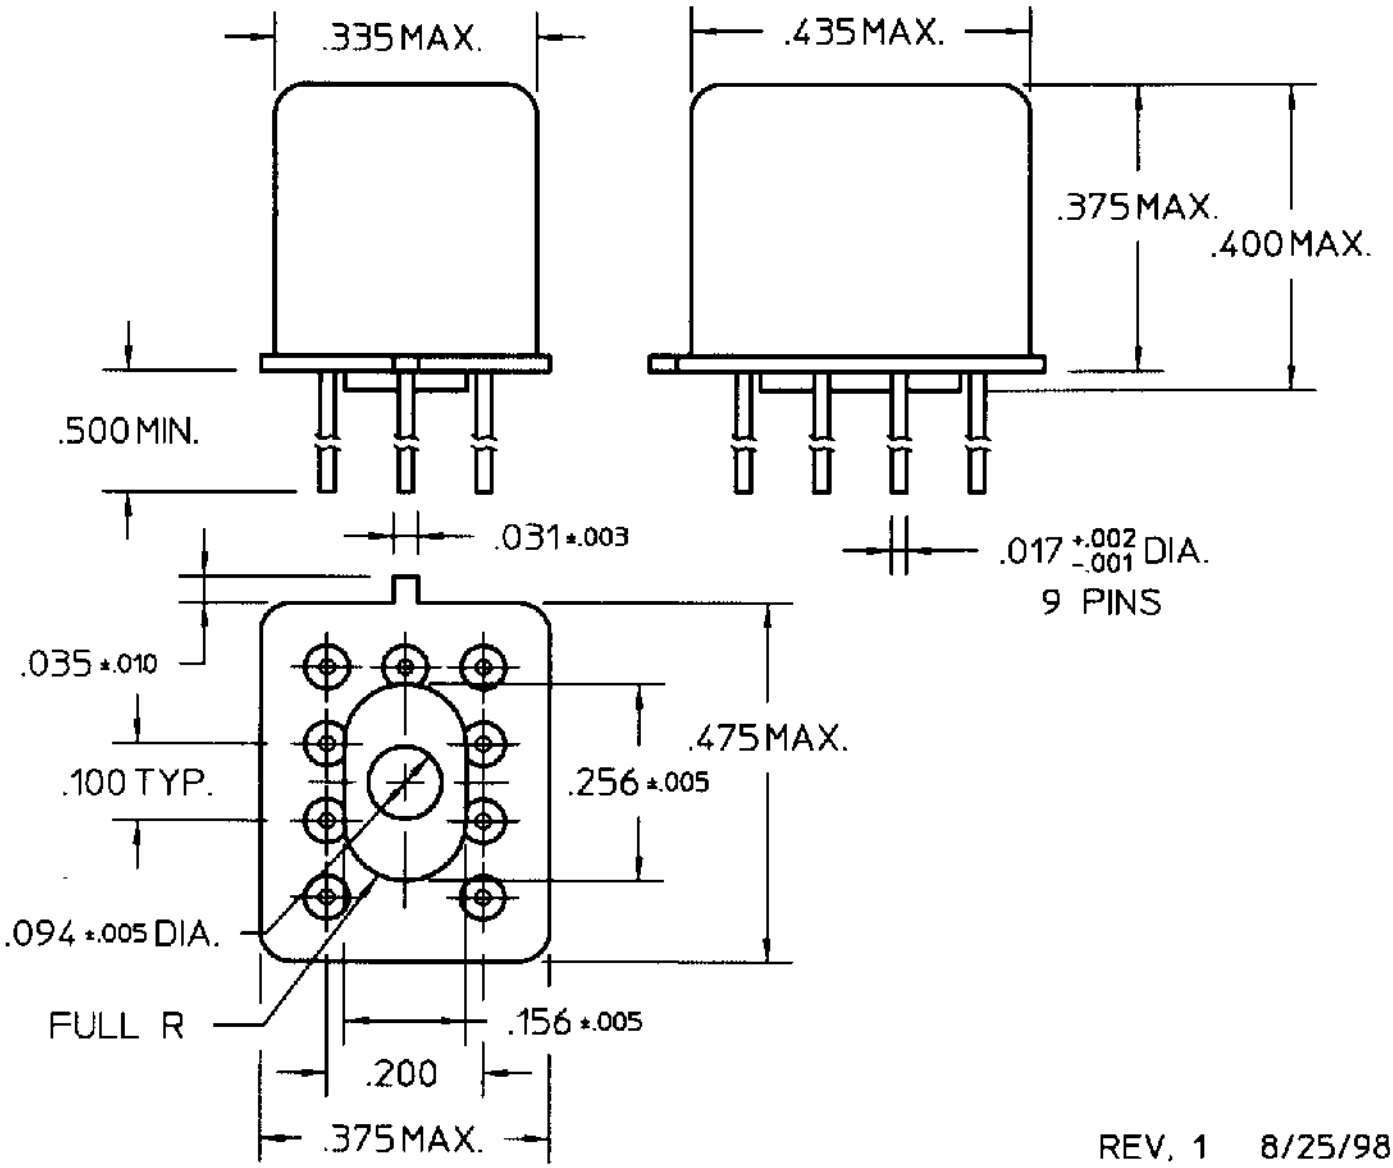


REV. 1 8/25/98

COIL: @ 25°C

RESISTANCE	1600 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
GATE TURN-ON	4.3 VDC MAX.
GATE TURN-OFF	0.5 VDC MAX.
MUST OPERATE	10.6 VDC
MUST RELEASE	6.0 VDC MAX, 0.97 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 7.5 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUST. QPL
CUST. NO. M28776/7-011P

TYPE "MGST" RELAY

CUSTOMER DATA SHEET

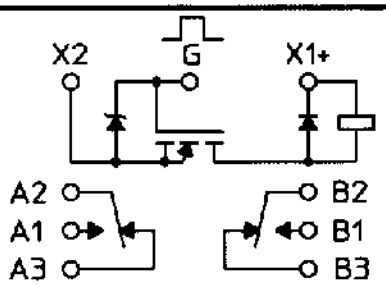

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/19/97 CK. JERRY 8/25/98

COMMUNICATIONS INSTRUMENTS, INC.

JMGST-18PW

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

141991-2 SMW73R0JT 1903112-2 2834055-1 CPF0402B37K4E1 RH73H2A40MKTN U5254-000005-030PA 1969656-1 2380312-2 3-1393225-0 650075-000 MPT100C18RF ROX05SJ18R 2-292161-3 2005330-1 917696-1 TE50BR39J 2377783-2 CRGCQ2010J3K3 1743455-2 2310537-1 3631B101LL SBCHE154R7K 1-794222-0 1-962915-1 175977-2 3430B2F51RTDF 936348-1 SBCHE64R7K 1393431-1