
Rocker Switch | **SRD1-1G-DC-1-BNN**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

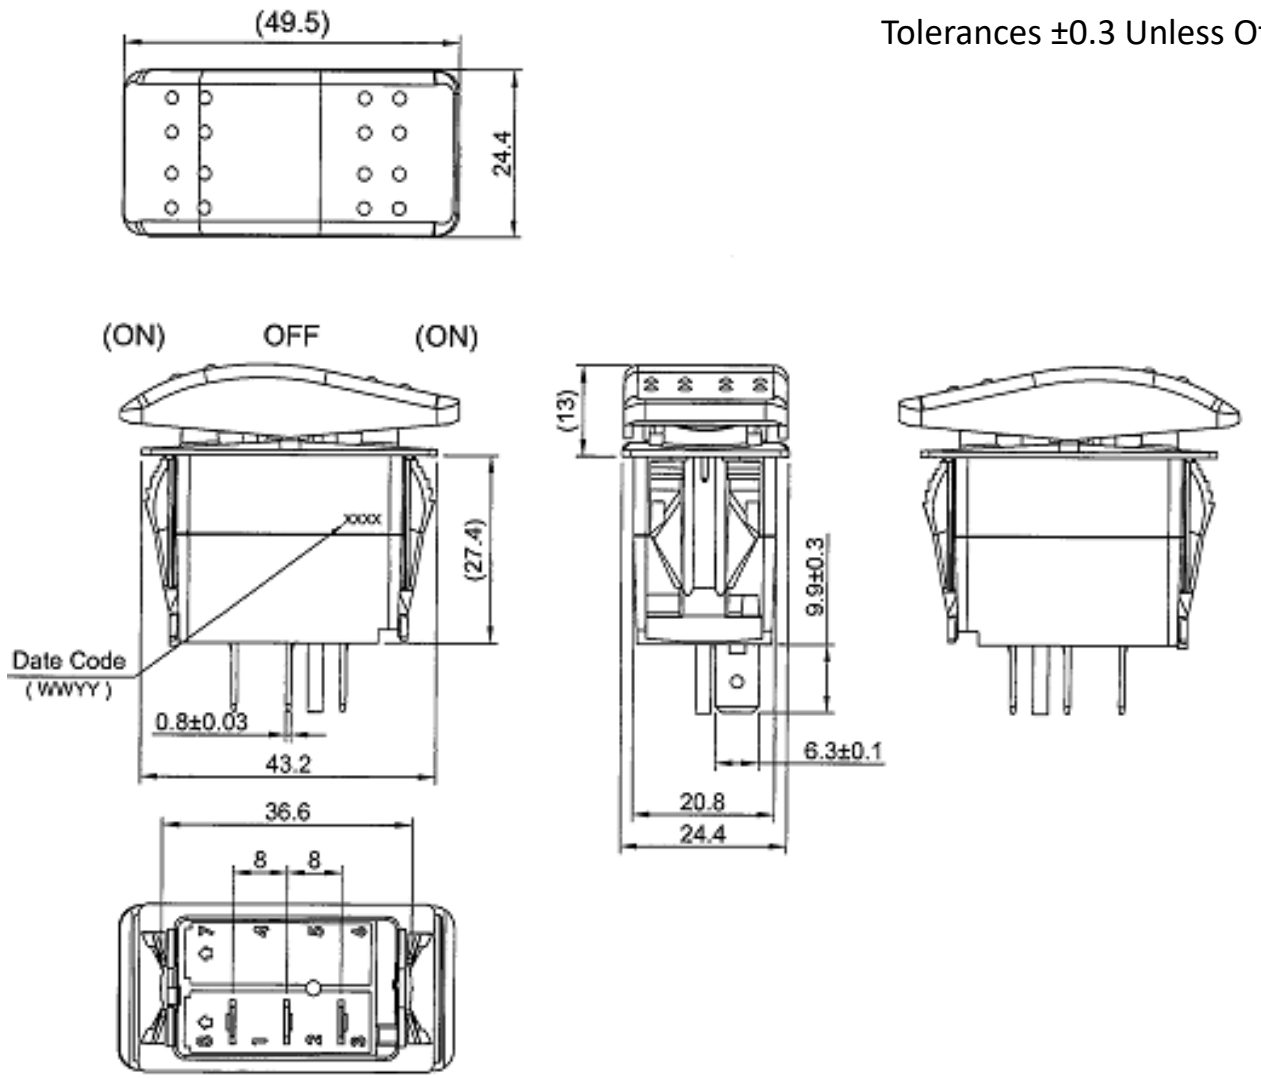


Mounting Hole

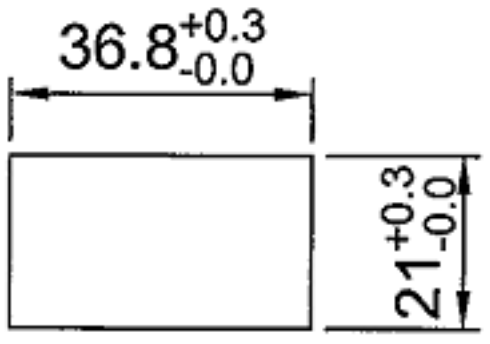

Thickness: 1.0-5.0mm

Circuit Diagram

3P SPDT (ON)-OFF-(ON)

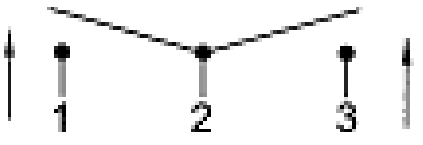

Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66 (94V-2)
Actuator	Black, Nylon 66 (94V-2)
Terminals	Silver plated copper
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PB-1B-DC-2-RIL SB-1B-DC-3-R SC-B SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN SRD1-2A-DC-1-BGN SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN TA2-1A-DC-5 TE6-1A-DC-1-UL PD-1E-DC-9-UL RC-1A-DC-1-AL RF3-1A-DC-2-GL RG3-1A-DC-1-B SRC1-1B-DC-1-B TE1-1F-DC-1-PB RD2-1A-DC-1-AL RF1-1A-DC-2-B-3 TB1-2H-DC-6 TC6-P1-Z TE3-1A-DC-1-AL WR1 SB-1B-DC-3-B TA1-1A-DC-4 PB-1A-DC-2-B SRB1-1G-DC-1-NN SRD2-2F-DC-1-BNN PB-1A-DC-2-RDL RA4-2A-DC-2-AL TA2-1G-DC-6-O