
SAC-4P-M12MSS/ 1,5-PUR PE SH - Power cable

1424104

https://www.phoenixcontact.com/us/products/1424104

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, orange RAL 2003, shielded (Advanced Shielding Technology), Plug straight M12, coding: S, on free cable end, cable length: 1.5 m, for AC current up to 12 A/690 V

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special S-coding
- Our standard: robust halogen-free PUR cable
- Shield power reliably – 360° shielding to reduce electromagnetic loads

Commercial data

Item number	1424104
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF05
Product key	BF1CCP
Catalog page	Page 289 (C-2-2019)
GTIN	4046356693097
Weight per piece (including packing)	251.1 g
Weight per piece (excluding packing)	249.5 g
Customs tariff number	85444290
Country of origin	PL

Technical data

Product properties

Product type	Power cable
Application	Power supply
Number of positions	4
No. of cable outlets	1
Shielded	yes
Coding	S

Data management status

Article revision	06

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	690 V AC
Nominal current I_N	12 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100

Connector

Connection 1

Type	Plug straight M12
Coding type	S (Power)

Connection 2

Type	free cable end

Cable/line

Cable length	1.5 m

PUR halogen-free orange shielded [PUR]

Dimensional drawing	
UL AWM Style	20234 / 10492 (80°C/1000 V)
Number of positions	4
Shielded	yes
Cable type	PUR halogen-free orange shielded [PUR]
Conductor cross section	4x 1.5 mm²
Wire diameter incl. insulation	≤ 2.5 mm
External cable diameter	9.70 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	orange RAL 2003
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, green/yellow
Thickness, insulation	0.40 mm
Thickness, outer sheath	1.20 mm
Overall twist	4 wires optimally twisted
Max. conductor resistance	≤ 13.3 Ω/km (at 20 °C)
Insulation resistance	≥ 10 MΩ*km (at 20 °C)
Nominal voltage, cable	1000 V AC
Test voltage	4260 V AC (5 min.)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	7.5 x D
Smallest bending radius, fixed installation	49 mm
Smallest bending radius, movable installation	73 mm
Dynamic load capacity (bending)	Max. bending cycles: 4000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s²
Dynamic load capacity (torsion)	Torsion: ±25 °/m
Halogen-free	according to VDE 0282-13 Appendix C
Flame resistance	in accordance with EN 60332-1-2
	in acc. to UL 1581 VW1
	According to CSA C 22.2 No. 210-05 FT1
Resistance to oil	in accordance with DIN EN 60811-2-1
	According to DIN EN 50363-10-2
Other resistance	UV resistant
	Low adhesion

Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)
	-30 °C ... 90 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP65
	IP67 (without preloading, as additional test in accordance with IEC 60529)
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111


Drawings

Dimensional drawing

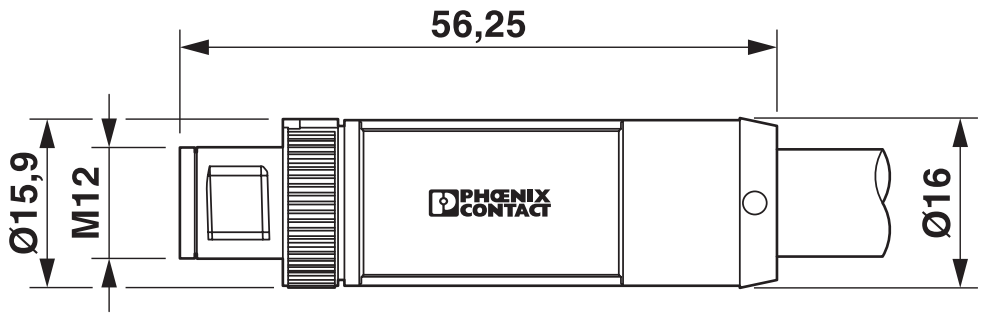


Plug, M12 x 1, straight, shielded

Circuit diagram

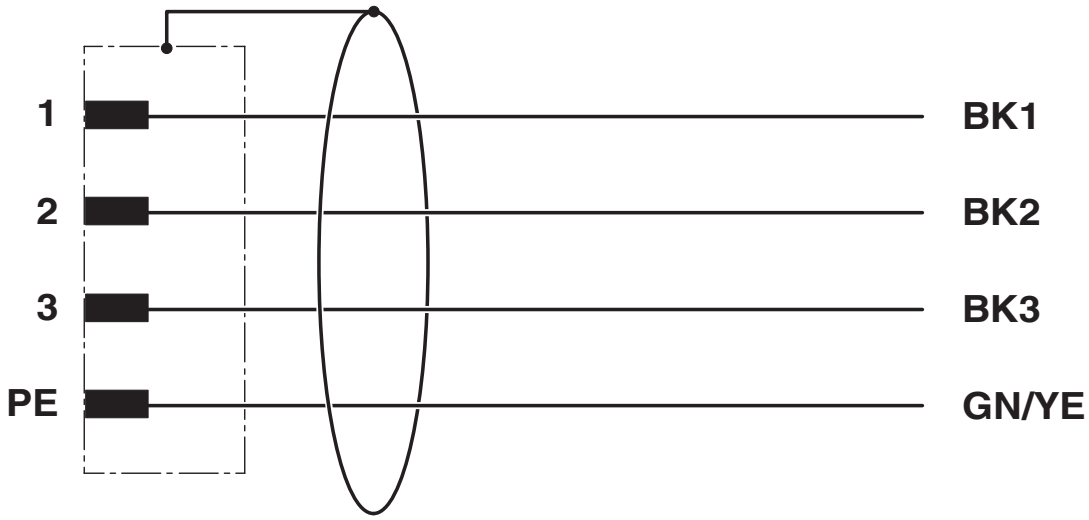


Schematic diagram

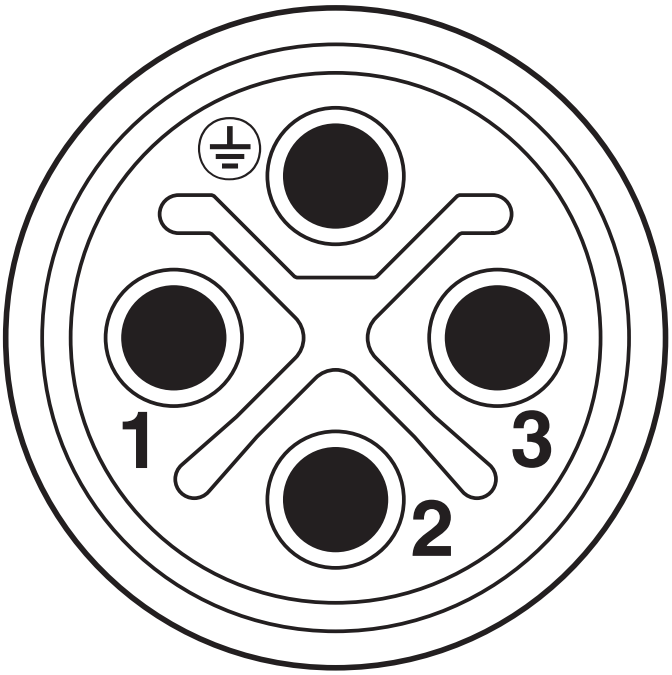

M12 plug pin assignment, 4-pos., S-coded, plug side view

Diagram

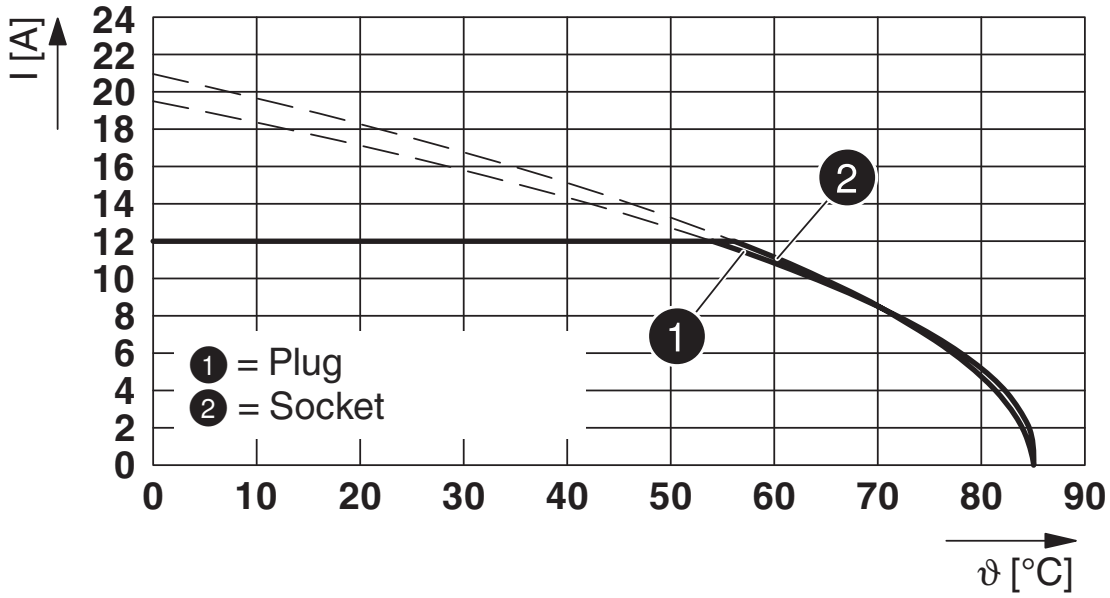

Base curve

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1424104

UL Listed
Approval ID: FILE E 468743

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	-	- 16

cUL Listed
Approval ID: FILE E 468743

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	12 A	- 16	-

EAC-RoHS
Approval ID: RU D-DE.HB35.B.00387

cULus Listed

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060327

ETIM

ETIM 9.0	EC001855

UNSPSC

UNSPSC 21.0	26121600

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PHOENIX CONTACT:

0818153 1407671 2800865 0818111 3210202 5435970 0817028 1539570 1712737 2800976 2838254
0800379 1052345:0021 1619453 0828799 1674794 3241240 0801422 0801820 0808671:0311 3244449
3248125 1604561 1778599 1956137 2905346 3036424 1442188 1817440 1899414