


IC-N-090303-A

RoHS

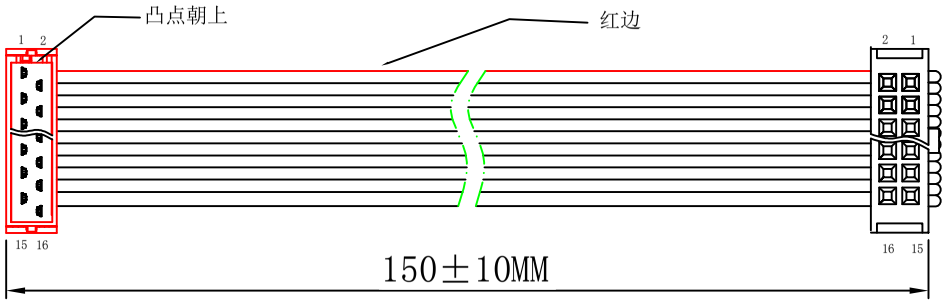

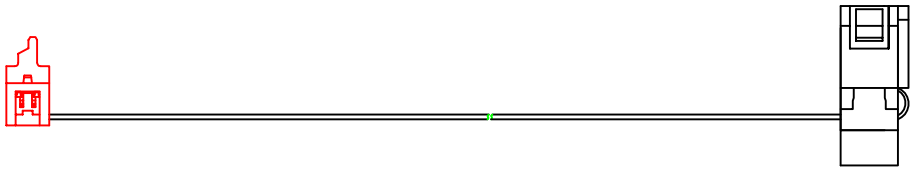

PIN ASSIGNMENT:

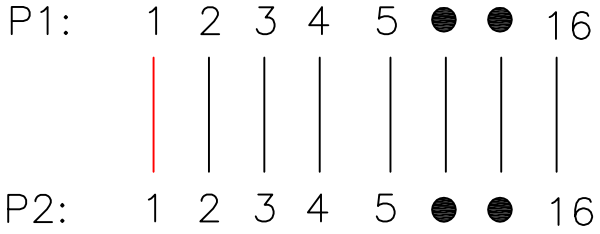

技术要求：

1、100%短/端路测试

2、TEMPERATURE RANGE: -20° C TO +105° C
CONTACT RESISTANCE: 5Ω MAX.
INSULATION RESISTANCE: 5MΩ MIN.
WITHSTANDING VOLTAGE: 300V 10S

How to order :

CL	254	X	X	XX	XXX	X	XX	X	X	X
Product Name: I:IDC F:FD CL:IDC Cable CLF:IDC+FD Cable	Pitch: 1.27mm 2.00mm 2.54mm	Number of Row: 1:Single Row 2:Double Row	Product Number: 2:Two piece Type 3:Three Piece Type 4: With Butterfly buckle	NO OF Pins Per Row:01～40P	Length of Cable: 0:No Cable XX:L=XXmm	Contact Plated: B:Half gold tin Q:ALL gold	Terminal Type: C:Common H:High tension S:Single contact Y:Double contact	Colour: 1:Black 2:Gray 3:Other	Cable Material 0:Common 6:26#/0.16TS 8:28#/0.127TS	Packing: E:PE Bag P:Package T:Tube packing R:Roll packing

OF TRANSPORT DIVSION:

序号	名　称	规 格 说 明	数量
1	端　子	红色IDC-16P 二件式 (2.54mm)	1
2	端　子	IDC-16P 二件式 (2.54mm)	1
3	电　线	2651 28# 1.27间距灰排 7/0.127TS	16
4	反　扣	反扣16P(2.54mm)	1

DRAW: JUDY	TOLERANCE		
	SELECT		✓
CHECK1:	ON \ TOL	1	2
	.XXX±	0.05	0.10
CHECK2:	.XX±	0.15	0.20
	.X±	0.20	0.25
APPD:	ANGLE±	2°	3°
	DATE	2026.9.3	

东莞市扬展康电子有限公司
DONG GUAN YZCONN ELECTRONIC CO., LTD

PATE NO: CL2542316150BC10E

TITLE: 2.54灰排线一端红色IDC两件式另一端黑色IDC 三件式 16P L= 150mm(含头)

SCALE	UNIT	REV
4 : 1	MM	B