


THIS PRODUCT MANUFACTURED WITH LEAD-FREE PROCESSING

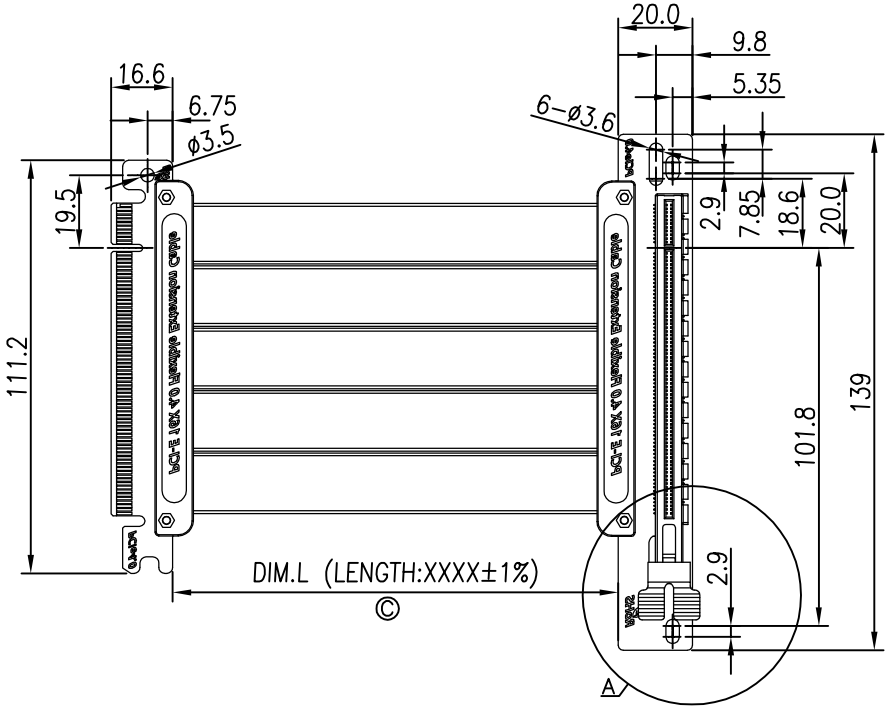

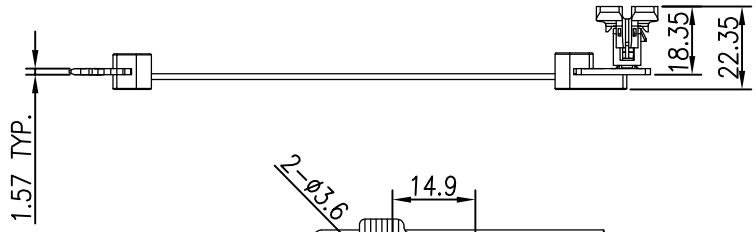

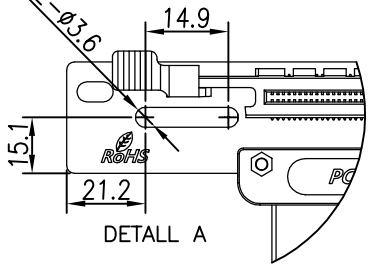


NOTES:

1. © REPRESENTS A CRITICAL DIMENSION.
2. SUB-TTF LENGTH IS EQUAL TO PCIEC LENGTH.
3. © ALL ASSEMBLIES TO BE 100% ELECTRICALLY TESTED FOR SHORTS AND OPENS.
4. © ALL ASSEMBLIES TO BE 100% HI-POT TESTED AT 300V.
5. HOT PLUG DETECT COMMON AND ONLY FIRST AND LAST USED ON EACH POSITION.
6. CABLE LENGTHS LONGER THAN 1015 MILLIMETERS ARE NOT SUPPORTED BY S.I. TEST DATA.
7. PART NO.

PCIE - XX - XXX - XXXX - EM - 2190

- PCI Generation
  - G3: PCIE3.0
  - G4: PCIE4.0
  - ....
- No. of Pins
  - 036: 36P
  - 064: 64P
  - 098: 98P
  - 164: 164P
- Product Length "DIM.L"
  - 0100: 100MM
  - 0210: 210MM
  - ....
- Type
  - EM: EC TO EM
  - EC: EC TO EC
  - ....

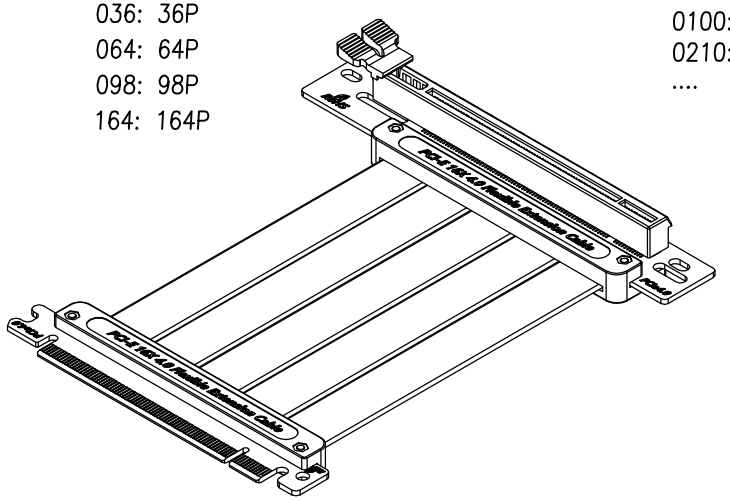

REV	ECN NO.	NAME	DATE

TOLERANCE	
LINEAR	ANGLES
X.±0.40	X°.±
.X±0.30	.X°±
.XX±0.20	.XX°±
.XXX±0.10	.XXX°±

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED

APPD:	Jason	MAT'L:	
CHKD:	Schumi	FINISH:	
DRWN:	Lei Songping	Q'TY:	


TITLE: PCI EXPRESS CABLE ASSEMBLY

PART NO. PCIE-XX-XXX-XXXX-XX-2190

DWG NO. C-PCIE221200018


UNITS	SCALE	SHEET	REV
MM	1 : 2	1 OF 2	A0

CUSTOMER

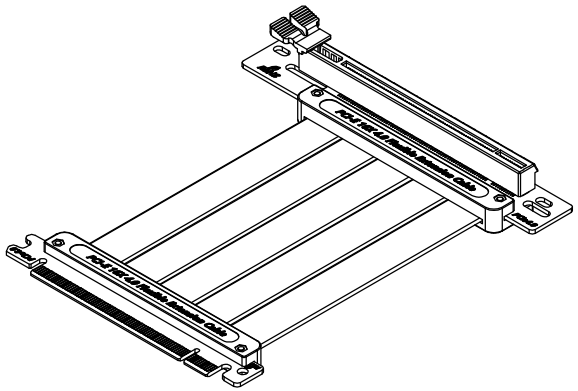


PCIE-XX-XXX-XXXX-EM-2190

EM: EC TO EM
EM CONN : 91621

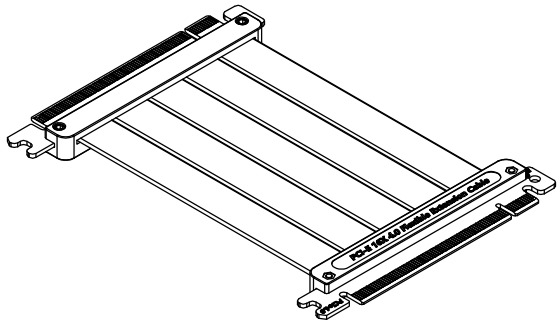

PCIE-XX-XXX-XXXX-EC-0018

EC: EC TO EC

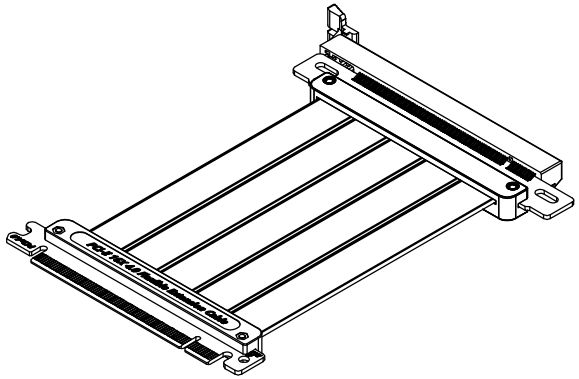

PCIE-XX-XXX-XXXX-EM-2218

EM: EC TO EM
EM CONN : 91622

WIRE DIAGRAM

	SIDE B		SIDE A	
	NAME	DESCRIPTION	NAME	DESCRIPTION
1	+12V	12 V power	PRSNT1#	Hot-plug detect
2	+12V	12 V power	+12V	12 V power
3	+12V	12 V power	+12V	12 V power
4	GND	GROUND	GND	GROUND
5	SMCLK	SM Bus Clock	JTAG2	TCK (test clock)
6	SMDATA	SM Bus Data	JTAG3	TDI (test input data)
7	GND	GROUND	JTAG4	TDO (test data output)
8	+3.3V	3.3 V power	JTAG5	TMS (test mode select)
9	JTAG1	TRST# (test resest)	+3.3V	3.3 V power
10	+3.3V aux	3.3 V aux power	+3.3V	3.3 V power
11	WAKE#	Signal for link	PERST#	Fundamental reset
	MECHANICAL KEY			
12	RSVD	RESERVED	GND	GROUND
13	GND	GROUND	REFCLK+	Reference clock
14	PETp0	Transmitter, DP	REFCLK-	Diff pair
15	PETn0	LANE 0	GND	GROUND
16	GND	GROUND	PERp0	Receiver, DP
17	PRSNT2#	Hot-plug detect	PERn0	LANE 0
18	GND	GROUND	GND	GROUND
	END OF X1 CONNECTOR			
19	PETp1	Transmitter, DP	RSVD	RESERVED
20	PETn1	LANE 1	GND	GROUND
21	GND	GROUND	PERp1	Receiver, DP
22	GND	GROUND	PERn1	LANE 1
23	PETp2	Transmitter, DP	GND	GROUND
24	PETn2	LANE 2	GND	GROUND
25	GND	GROUND	PERp2	Receiver, DP
26	GND	GROUND	PERn2	LANE 2
27	PETp3	Transmitter, DP	GND	GROUND
28	PETn3	LANE 3	GND	GROUND
29	GND	GROUND	PERp3	Receiver, DP
30	RSVD	RESERVED	PERn3	LANE 3
31	PRSNT2#	Hot-plug detect	GND	GROUND
32	GND	GROUND	RSVD	RESERVED
	END OF X4 CONNECTOR			
33	PETp4	Transmitter, DP	RSVD	RESERVED
34	PETn4	LANE 4	GND	GROUND
35	GND	GROUND	PERp4	Receiver, DP
36	GND	GROUND	PERn4	LANE 4
37	PETp5	Transmitter, DP	GND	GROUND
38	PETn5	LANE 5	GND	GROUND
39	GND	GROUND	PERp5	Receiver, DP
40	GND	GROUND	PERn5	LANE 5
41	PETp6	Transmitter, DP	GND	GROUND
42	PETn6	LANE 6	GND	GROUND
43	GND	GROUND	PERp6	Receiver, DP
44	GND	GROUND	PERn6	LANE 6
45	PETp7	Transmitter, DP	GND	GROUND
46	PETn7	LANE 7	GND	GROUND
47	GND	GROUND	PERp7	Receiver, DP
48	PRSNT2#	Hot-plug detect	PERn7	LANE 7
49	GND	GROUND	GND	GROUND
	END OF X8 CONNECTOR			

50	PETp8	Transmitter, DP	RSVD	RESERVED
51	PETn8	LANE 8	GND	GROUND
52	GND	GROUND	PERp8	Receiver, DP
53	GND	GROUND	PERn8	LANE 8
54	PETp9	Transmitter, DP	GND	GROUND
55	PETn9	LANE 9	GND	GROUND
56	GND	GROUND	PERp9	Receiver, DP
57	GND	GROUND	PERn9	LANE 9
58	PETp10	Transmitter, DP	GND	GROUND
59	PETn10	LANE 10	GND	GROUND
60	GND	GROUND	PERp10	Receiver, DP
61	GND	GROUND	PERn10	LANE 10
62	PETp11	Transmitter, DP	GND	GROUND
63	PETn11	LANE 11	GND	GROUND
64	GND	GROUND	PERp11	Receiver, DP
65	GND	GROUND	PERn11	LANE 11
66	PETp12	Transmitter, DP	GND	GROUND
67	PETn12	LANE 12	GND	GROUND
68	GND	GROUND	PERp12	Receiver, DP
69	GND	GROUND	PERn12	LANE 12
70	PETp13	Transmitter, DP	GND	GROUND
71	PETn13	LANE 13	GND	GROUND
72	GND	GROUND	PERp13	Receiver, DP
73	GND	GROUND	PERn13	LANE 13
74	PETp14	Transmitter, DP	GND	GROUND
75	PETn14	LANE 14	GND	GROUND
76	GND	GROUND	PERp14	Receiver, DP
77	GND	GROUND	PERn14	LANE 14
78	PETp15	Transmitter, DP	GND	GROUND
79	PETn15	LANE 15	GND	GROUND
80	GND	GROUND	PERp15	Receiver, DP
81	PRSNT2#	Hot-plug detect	PERn15	LANE 15
82	RSVD	RESERVED	GND	GROUND
	END OF X16 CONNECTOR			

TOLERANCE	
LINEAR	ANGLES
X.±0.40	X°.±
.X±0.30	.X°±
.XX±0.20	.XX°±
.XXX±0.10	.XXX°±

UMax conn 东莞市友贸实业有限公司
DONGGUAN UMAX ENTERPRISE LIMITED
C:\Users\Wang\Desktop\邓子\邓子\pciec-xxx-xxxx-xx-x-x-xx-mkt-3-2.jpg

APPD:	Jason	MAT'L:	
CHKD:	Schumi	FINISH:	
DRWN:	Lei Songping	Q'TY:	

TITLE: PCI EXPRESS CABLE ASSEMBLY

PART NO. PCIE-XX-XXX-XXXX-XX-2190

DWG NO. C-PCIE221200018

UNITS	SCALE	SHEET	REV
MM	1 : 2	2 OF 2	A0

REV	ECN NO.	NAME	DATE

CUSTOMER

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

UMaxconn:

UMAX7102501 UMAX7412821 UMAX95202101 20912-115110C 3091-10102T 91302-32-067RDM 91653-12013CHF PCIE-G4-164-0300-EC-0018 3091-10103T 3126-10102D 3157-00102D 91302-42-067RDM 91304-68-052R2 SA10BL01D UMAX7111201 91652-12013CHF KSP20LG154 UMAX7412401 91613-110143D 91304-56-052R2 91619-110141D UMAX95112101 3183-10111P1T 90411-151131 91304-40-052R2 91619-110140D UMAX7101201 91302-85-067RCB 91304-70-052R2 91613-110140D