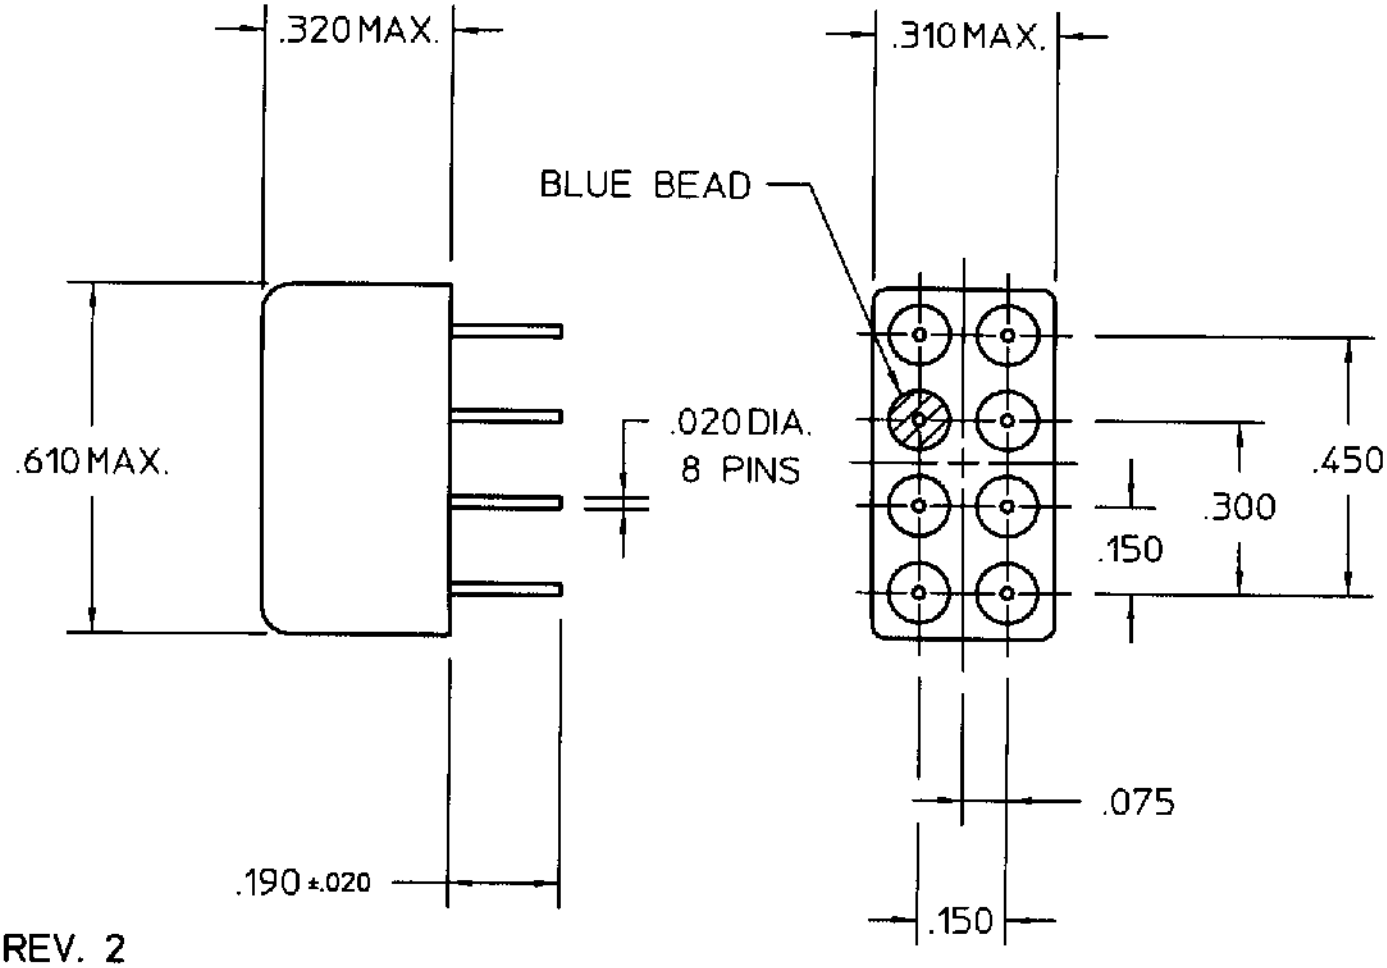


REV. 2

DCO 141865

COIL: @ 25°C

RESISTANCE 1350 OHMS ± 10%

NOMINAL VOLTAGE 20.0-35.0 VDC (26.5)

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 100 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

BOUNCE 1.5 MS MAX.

DIELECTRIC 500 VAC - ALL POINTS

CUSTOMER DATA SHEET

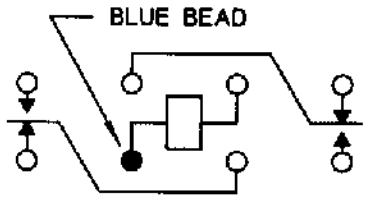

TERMINAL VIEW

CONTACT RATING: 2A 28VDC RES.,
0.5A 28VDC IND. L/R .008 MAX., 0.5A
115VAC CASE UNGROUNDED, .125A 115VAC
CASE GROUNDED RES., 100,000 OPS

DR. R.B. 10/4/96 CK 3/7/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.

CUST. NO. REV.

"3SBC" RELAY

3SBC5004K1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1903112-2 2380312-2 CRGCQ2010J3K3 SMW73R0JT 175977-2 2377783-2 2834055-1 141991-2 1969656-1 650075-000 RH73H2A40MKTN SBCHE64R7K 1743455-2 2-292161-3 2310537-1 3631B101LL 936348-1 U5254-000005-030PA 3430B2F51RTDF ROX05SJ18R 1-962915-1 1393431-1 MPT100C18RF SBCHE154R7K TE50BR39J 1-794222-0 2005330-1 CPF0402B37K4E1 3-1393225-0 917696-1