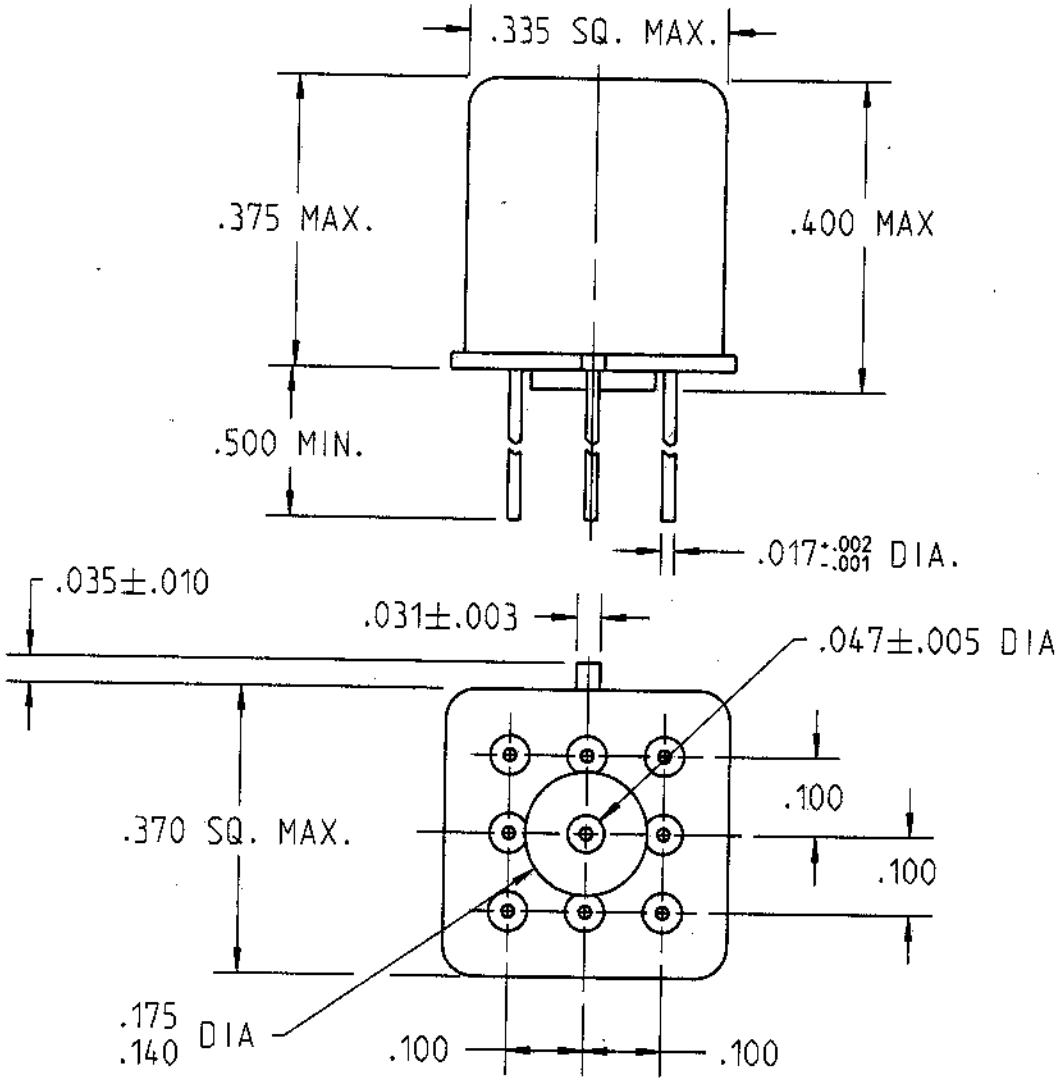


REV. 0

DCO 143756

COIL: @ 25°C

RESISTANCE	100 OHMS ±10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.6 VDC
MUST RELEASE	1.4 VDC MAX. 0.23 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX

RELEASE TIME 7.5 MS MAX

CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. B.D. 22MAY03 CK 5/23/03

CII Technologies™
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/42-049L REV.

"JMGSD" RELAY

JMGSCD-5LW

F-718 REV. 4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

JMGSCD-5LW