

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 - ALL RIGHTS RESERVED.


LOC	DIST
-	-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	I	FIRST ISSUE	18APR2013	WJ	DH
	A	ECR-13-011357	17JUL2013	RK	MG

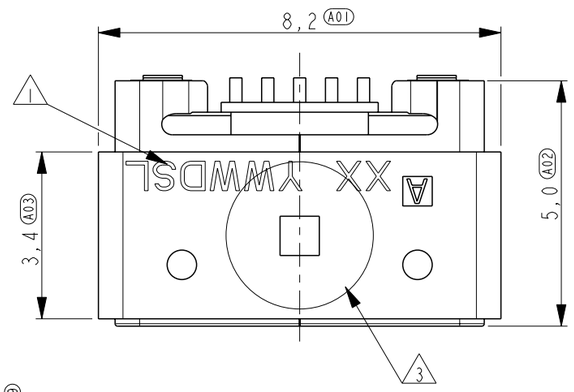


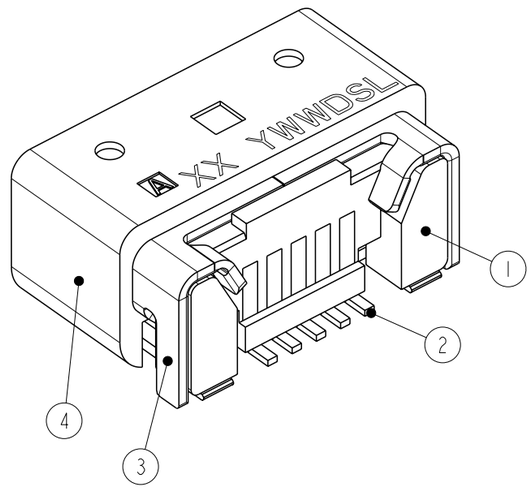


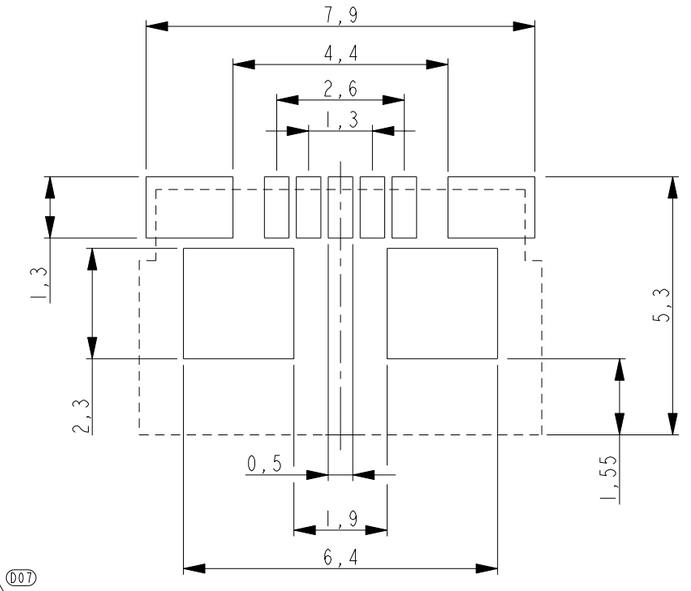



RECOMMENDED PWB LAYOUT (REF)

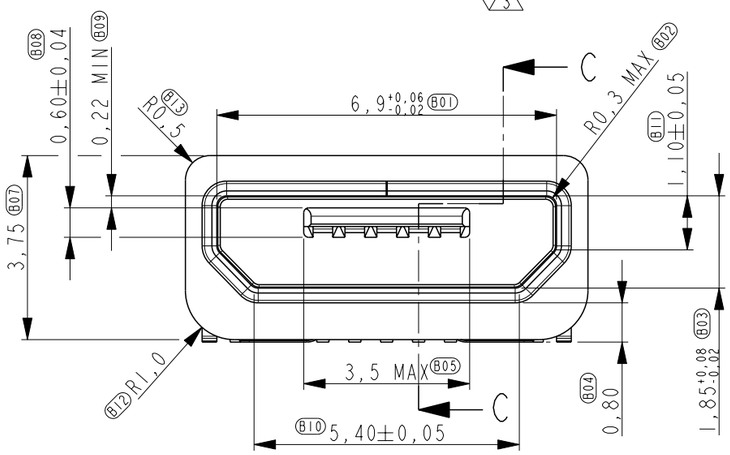



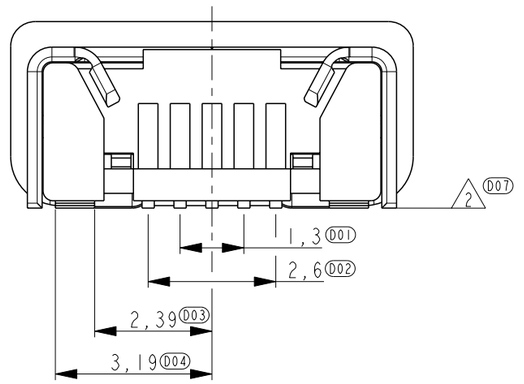

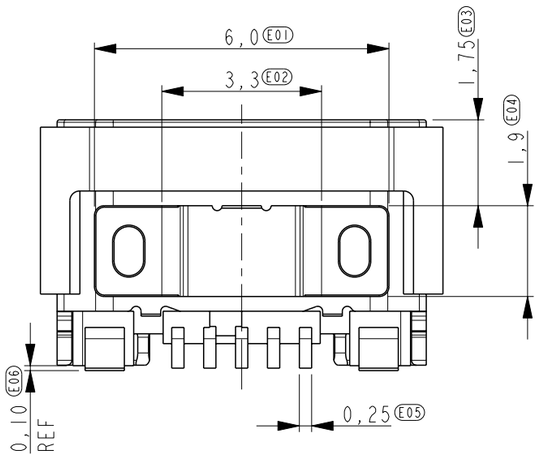

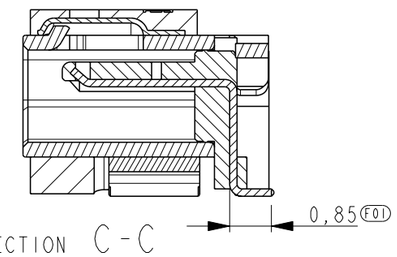

SECTION C-C

NOTES:
1. VERSION: XX, PRODUCTION DATE: YWWD, SHIFT CODE: S, PRODUCTION LINE NO: L.
2. COPLANARITY OF 11 SOLDER SURFACES 0,08 MAX AFTER 3X REFLOW.
3. PICK AND PLACE AREA ∅3

TE PN: 2246077-1

ITEM NO	DESCRIPTION	MATERIAL	FINISH
4	SLEEVE	LCP	
3	SHELL	STAINLESS STEEL	Tin over Nickel plating
2	CONTACT	COPPER ALLOY	Gold over Nickel plating
1	HOUSING	LCP	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0,2
1 PLC	±0,1
2 PLC	±0,1
3 PLC	±0,025
4 PLC	±0,001
ANGLES	±2°

MATERIAL -

FINISH -

DWN	W.Jansen	18APR2013
CHK	W.Jansen	18APR2013
APVD	D.Halberstadt	18APR2013
PRODUCT SPEC	108-19460	
APPLICATION SPEC	-	
WEIGHT	0,33gr	

TE Connectivity

NAME
SPLASH-PROOF MICRO USB
B-TYPE
0,8 mm OFFSET

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2246077	-


CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 3 | REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 - ALL RIGHTS RESERVED.


LOC	DIST
-	-


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

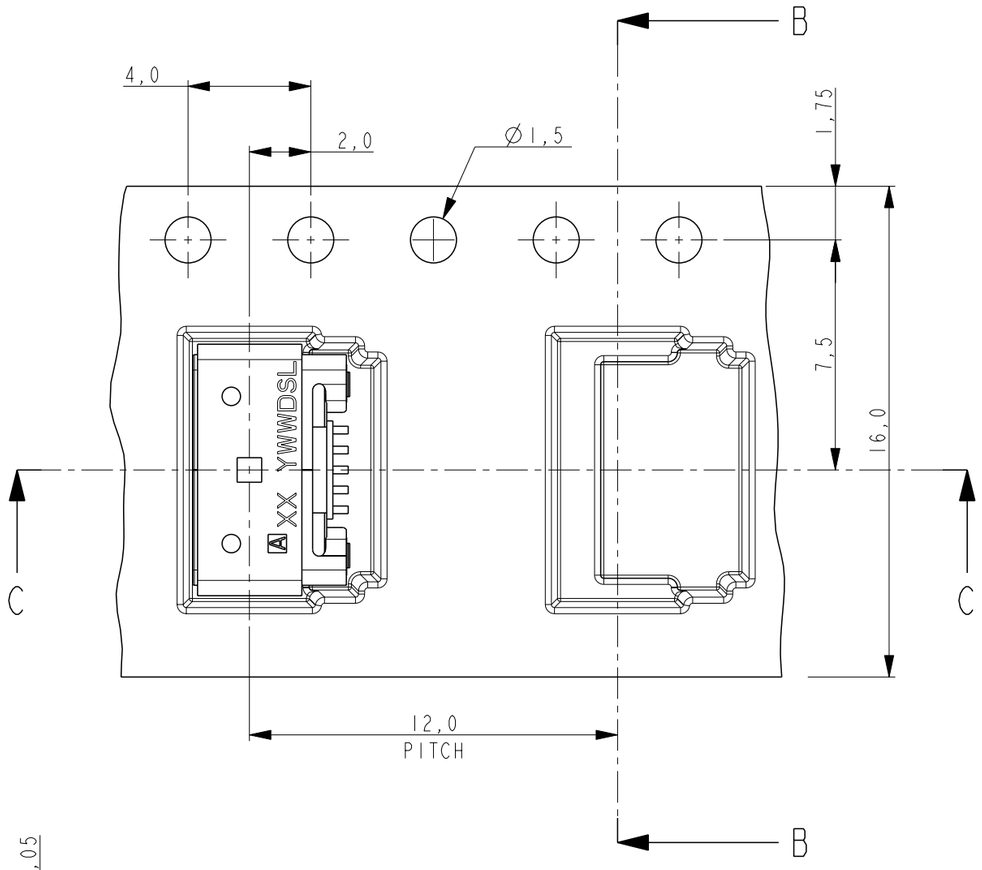



SECTION B-B

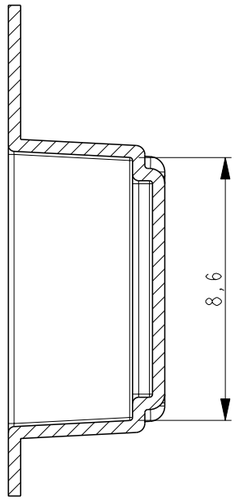



REEL DIA 330

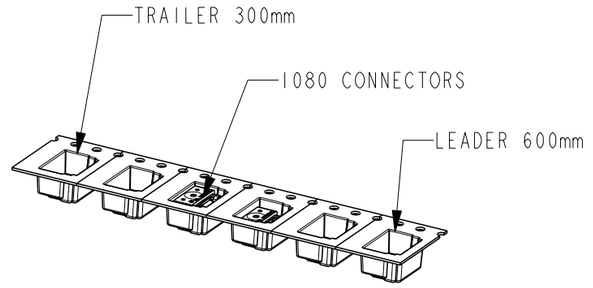

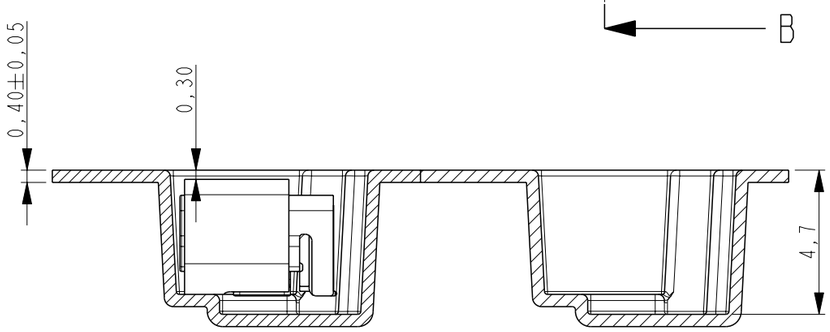

SECTION C-C

NOTES:
COVER, EMBOSS TAPE AND REEL ACCODING EIA STANDARD 481-D

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0,2
1 PLC	±0,1
2 PLC	±0,1
3 PLC	±0,025
4 PLC	±0,001
ANGLES	±2°

MATERIAL -
FINISH -

DWN	18APR2013 W.Jansen
CHK	18APR2013 W.Jansen
APVD	18APR2013 D.Halberstadt
PRODUCT SPEC	108-19460
APPLICATION SPEC	-
WEIGHT	0,33gr

TE Connectivity

NAME
SPLASH-PROOF MICRO USB
B-TYPE
0,8 mm OFFSET

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2246077	-


CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 3 | REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 - ALL RIGHTS RESERVED.


LOC	DIST
-	-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

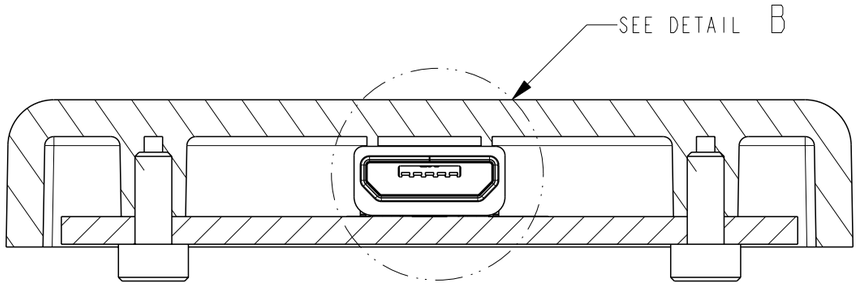


SECTION D-D

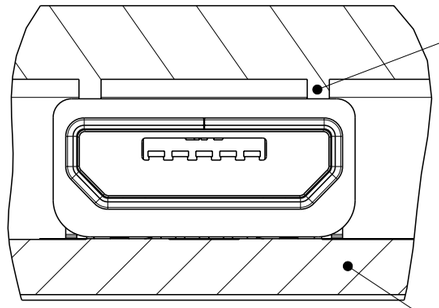


DETAIL B
SCALE 6:1

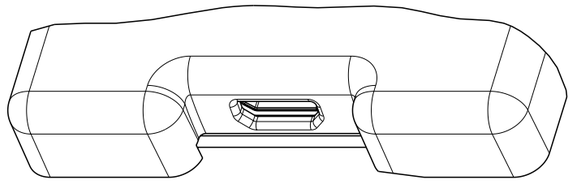


SCALE 2:1

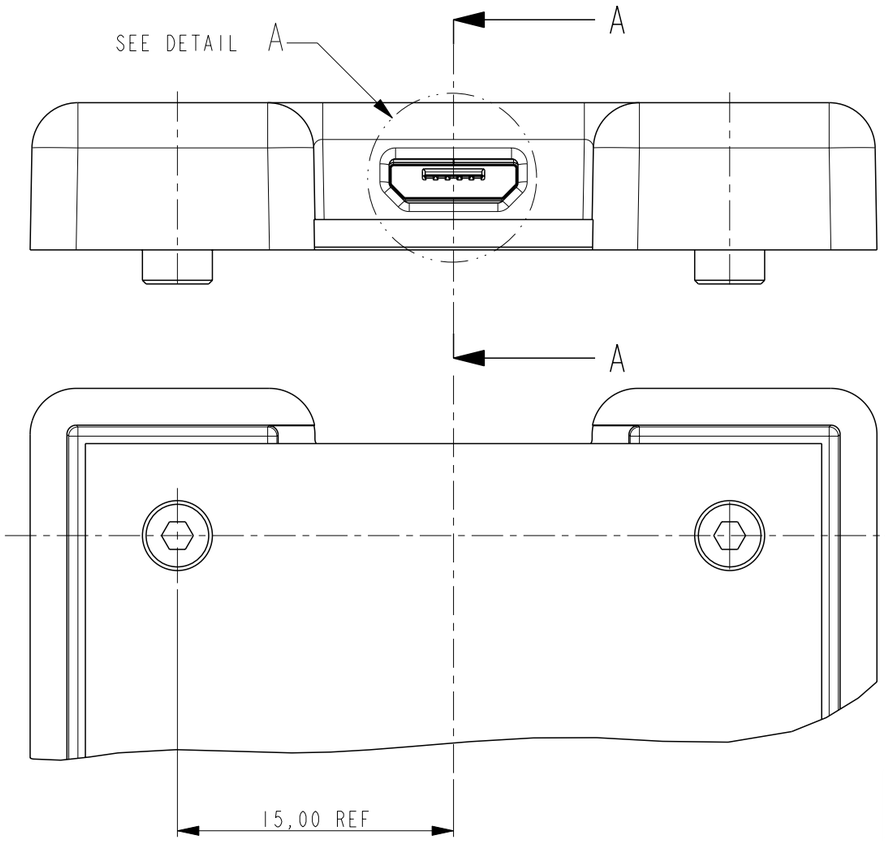

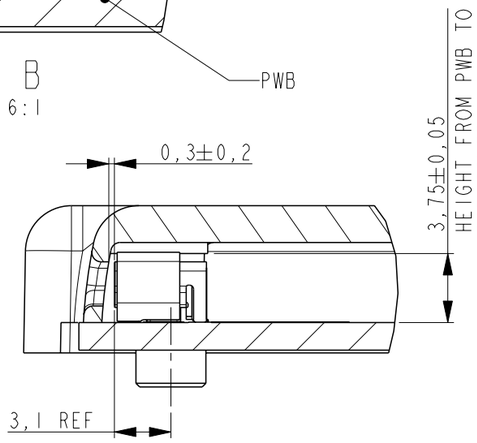

SECTION A-A

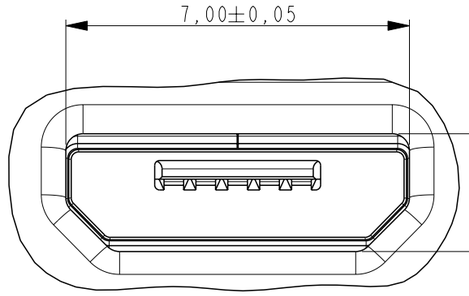

RECOMMENDED COVER HOLE SHAPE (REF)

DETAIL A
SCALE 8:1

RECOMMENDED PWB AND COVER ASSEMBLY (REF)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0,2
1 PLC	±0,1
2 PLC	±0,1
3 PLC	±0,025
4 PLC	±0,001
ANGLES	±2°

MATERIAL -

FINISH -

DWN	18APR2013 W.Jansen
CHK	18APR2013 W.Jansen
APVD	18APR2013 D.Halberstadt
PRODUCT SPEC	108-19460
APPLICATION SPEC	-
WEIGHT	0,33gr

TE Connectivity

NAME
SPLASH-PROOF MICRO USB
B-TYPE
0,8 mm OFFSET

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2246077	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 3 OF 3 | REV A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2380312-2 1-794222-0 936348-1 MPT100C18RF U5254-000005-030PA 1393431-1 141991-2 2005330-1 2310537-1 3631B101LL SBCHE154R7K 917696-1 CPF0402B37K4E1 ROX05SJ18R 175977-2 1903112-2 1969656-1 2-292161-3 3-1393225-0 650075-000 RH73H2A40MKTN 3430B2F51RTDF TE50BR39J 1743455-2 2377783-2 CRGCQ2010J3K3 SBCHE64R7K SMW73R0JT 2834055-1 1-962915-1