
RoHS COMPLIANT

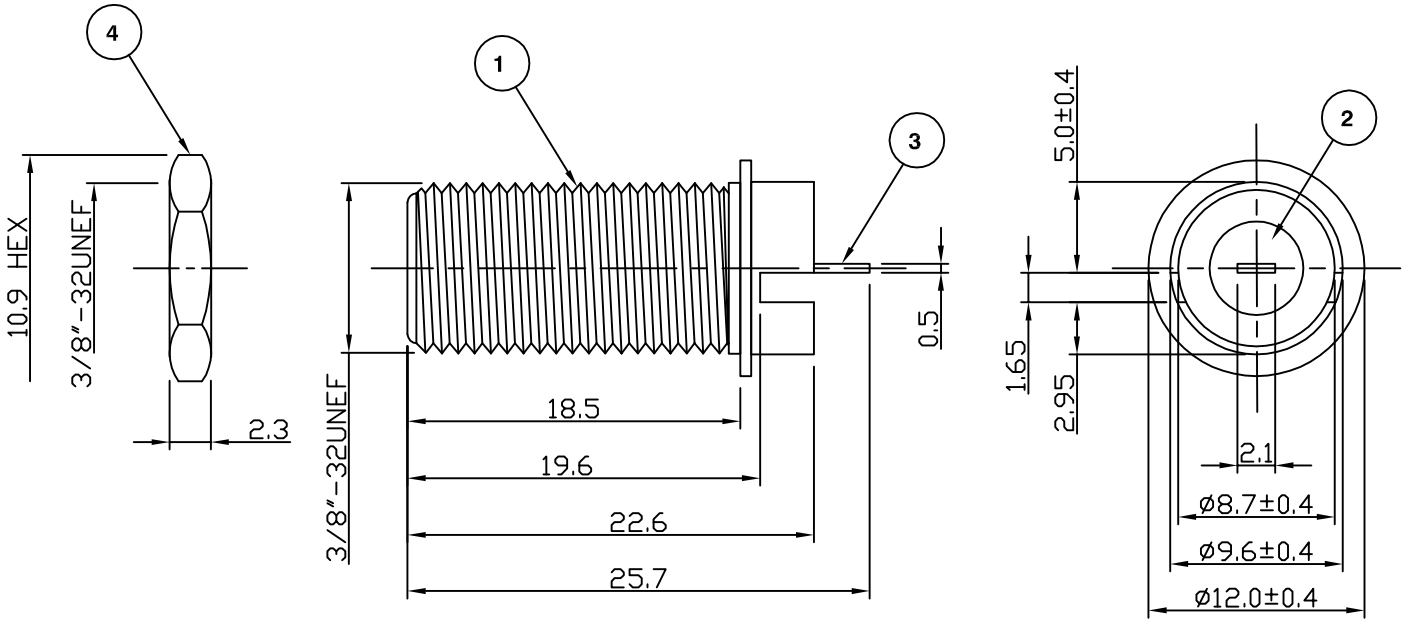

Electrical Characteristics

Nominal Impedance:	75 ohms
Frequency Range:	DC to 2 GHz
Operating Voltage (rms):	250 V maximum at sea level

Mechanical Characteristics

Mating Cycles:	200 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, tin plated
2	Dielectric	Polypropylene
3	Contact	Brass, tin plated
4	Nut	Steel, nickel plated

Up Issue	LB	4	20 Oct 11
CAD Issue	SN	3	26 Sep 02
Up Issue	DW	2	02 Jul 99
First Issue	AT	1	26 Oct 98
DESCRIPTION OF REVISION	APPVD	ISS	DATE

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	
DIMENSIONS: mm	
TOLERANCES: ± 0.2mm unless otherwise stated	
DRAWN BY:	S Nash
CHECKED BY:	P Couzens
APPROVED BY:	P Couzens
DATE:	26 Sep 02

TITLE:

F Edge Mount PCB Jack

PART NUMBER:

VF312

PAGE: 1 of 1

COPYRIGHT © 2002 VITELEC ELECTRONICS LIMITED

THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

145-0693-002 21-14-M5.0 415-0203-024 12-141 142-0403-011 145-0701-821 40-9715HM 415-0028-048 415-0043-MM250 DEUH-9P 111-0102-001 135-3402-001 30-9506-88 40-98443N-C 415-0030-MM150 M24308/4-5F 131-3701-306 147-0701-241 30-9516 8-141 CN1021A14G03P8-040 DD2466134 415-0536-012 ATT-0263-04-SMA-02 CJ70-7 M49142/03-0005 108-0913-001 C0909A18-11PN-106 147-0701-832 CN0967C10A20P6-040