T92S11A22-208 ✔ ACTIVE

Potter & Brumfield | Potter & Brumfield T92

TE Internal #: 8-1393211-5

General Purpose Power Relay, Monostable, 4 W Coil, 2841 ohm Coil Resistance, UL Coil Insulation Class F, Potter & Brumfield T92, Power Relays

View on TE.com >

Relays & Contactors > Relays > Power Relays > PCB Power Relay: 40 Amp, Monostable



Relay Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Coil Power Rating DC: **4 W**

Coil Resistance: **2841 Ω**

Coil Special Features: **UL Coil Insulation Class F**

All PCB Power Relay: 40 Amp, Monostable (66)

Features

Product Type Features

Relay Type	General Purpose Power Relay

Configuration Features

Coil Special Features	UL Coil Insulation Class F
Contact Arrangement	2 Form C DPDT-CO
Contact Number of Poles	2

Electrical Characteristics

Coil Current	.019 A
Insulation Initial Dielectric Between Open Contacts	1500 Vrms
Contact Limiting Making Current	40 A
Contact Limiting Continuous Current	40 A
Insulation Initial Dielectric Between Adjacent Contacts	1500 Vrms
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Initial Resistance	1000 MΩ
Contact Limiting Breaking Current	40 A
Coil Power Rating DC	4 W
Coil Resistance	2841 Ω
Coil Voltage Rating	208 VAC

Contact Current Rating	30 A
Contact Switching Load (Min)	500mA @ 12V
Contact Switching Voltage (Max)	600 VAC
Contact Voltage Rating	277 VAC

Body Features

Enclosure Type	Sealed
Product Weight	86 g[3.034 oz]

Contact Features

Contact Material	AgCdO

Termination Features

Relay Connection Type	Terminals
Terminal Configuration	Quick Connect Terminals

Mechanical Attachment

Product Mounting Feature Type	Flange with Mounting Slots
Product Mount Type	Panel

Dimensions

Insulation Clearance Between Contact & Coil	8 mm[.315 in]
Insulation Creepage Between Contact & Coil	8 mm[.315 in]
Product Width	34.54 mm[1.36 in]
Product Length	68.58 mm[2.7 in]
Product Height	26.42 mm[1.04 in]

Usage Conditions

Environmental Category of Protection	RTII
Environmental Ambient Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

Operation/Application

Current Type	AC
Coil Magnetic System	Monostable

Packaging Features

Packaging Method	Box & Tray, Bundle

Other

Length Class (Mechanical)	50 – 60 mm
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	25 – 30 mm
Width Class (Mechanical)	30 – 40 mm
Contact Current Class	30 – 50 A

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Cadmium oxide (10% in Component Part) **Article Safe Usage Statements:** Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 8-1393211-3
T92S11A22-12

Also in the Series | Potter & Brumfield T92

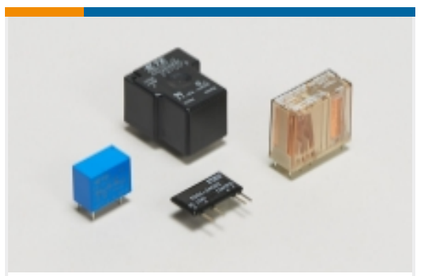


Power Relays(69)

Customers Also Bought



TE Part #4-1393211-0
T92P11A22-120




TE Part #1445886-6
RET PIN,SNAP-IN RECEPTACLE



TE Part #1445957-2
HSG SUB ASY,BLACK



TE Part #1445962-1
CONT,45A PWR PROD,STRIP,SILVER



TE Part #1604079-1
HSG,2X4 POWER PROD RECPT



TE Part #E77288-000
RNF-100-BK Heat Shrink Tubing



TE Part #4-1393211-2
T92P11A22-208

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-1393211-5_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_8-1393211-5_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-1393211-5_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

T92 Two-Pole, 30 Amp, PC Board or Panel Mount Relay

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

CQC_CERT_16002142753_C1

English

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SMW73R0JT 1-962915-1 3-1393225-0 936348-1 SBCHE154R7K 3430B2F51RTDF ROX05SJ18R
2310537-1 2377783-2 2380312-2 141991-2 175977-2 2-292161-3 2005330-1 650075-000
CPF0402B37K4E1 MPT100C18RF U5254-000005-030PA 2834055-1 1-794222-0 1743455-2 SBCHE64R7K
1969656-1 3631B101LL 1903112-2 917696-1 TE50BR39J 1393431-1 CRGCQ2010J3K3
RH73H2A40MKTN